

DENON

Ver. 2

Please refer to the
MODIFICATION NOTICE.

SERVICE MANUAL

MODEL	JP	E3	E2	EK	E2A	E1C	E1K	EUT
DCD-710AE			✓					

CD PLAYER

• For purposes of improvement, specifications and design are subject to change without notice.

• Please use this service manual with referring to the operating instructions without fail.

• Some illustrations using in this service manual are slightly different from the actual set.

DENON

D&M Holdings Inc.

SAFETY PRECAUTIONS

The following check should be performed for the continued protection of the customer and service technician.

LEAKAGE CURRENT CHECK

Before returning the unit to the customer, make sure you make either (1) a leakage current check or (2) a line to chassis resistance check. If the leakage current exceeds 0.5 millamps, or if the resistance from chassis to either side of the power cord is less than 460 kohms, the unit is defective.

LASER RADIATION

Do not stare into beam or view directly with optical instruments, class 3A laser product.

CAUTION Please heed the points listed below during servicing and inspection.

◎ Heed the cautions!

Spots requiring particular attention when servicing, such as the cabinet, parts, chassis, etc., have cautions indicated on labels or seals. Be sure to heed these cautions and the cautions indicated in the handling instructions.

◎ Caution concerning electric shock!

- (1) An AC voltage is impressed on this set, so touching internal metal parts when the set is energized could cause electric shock. Take care to avoid electric shock, by for example using an isolating transformer and gloves when servicing while the set is energized, unplugging the power cord when replacing parts, etc.
- (2) There are high voltage parts inside. Handle with extra care when the set is energized.

◎ Caution concerning disassembly and assembly!

Though great care is taken when manufacturing parts from sheet metal, there may in some rare cases be burrs on the edges of parts which could cause injury if fingers are moved across them. Use gloves to protect your hands.

◎ Only use designated parts!

The set's parts have specific safety properties (fire resistance, voltage resistance, etc.). For replacement parts, be sure to use parts which have the same properties. In particular, for the important safety parts that are marked \triangle on wiring diagrams and parts lists, be sure to use the designated parts.

◎ Be sure to mount parts and arrange the wires as they were originally!

For safety reasons, some parts use tape, tubes or other insulating materials, and some parts are mounted away from the surface of printed circuit boards. Care is also taken with the positions of the wires inside and clamps are used to keep wires away from heating and high voltage parts, so be sure to set everything back as it was originally.

◎ Inspect for safety after servicing!

Check that all screws, parts and wires removed or disconnected for servicing have been put back in their original positions, inspect that no parts around the area that has been serviced have been negatively affected, conduct an insulation check on the external metal connectors and between the blades of the power plug, and otherwise check that safety is ensured.

(Insulation check procedure)

Unplug the power cord from the power outlet, disconnect the antenna, plugs, etc., and turn the power switch on. Using a 500V insulation resistance tester, check that the insulation resistance between the terminals of the power plug and the externally exposed metal parts (antenna terminal, headphones terminal, microphone terminal, input terminal, etc.) is $1M\Omega$ or greater. If it is less, the set must be inspected and repaired.



CAUTION Concerning important safety parts

Many of the electric and structural parts used in the set have special safety properties. In most cases these properties are difficult to distinguish by sight, and using replacement parts with higher ratings (rated power and withstand voltage) does not necessarily guarantee that safety performance will be preserved. Parts with safety properties are indicated as shown below on the wiring diagrams and parts lists in this service manual. Be sure to replace them with parts with the designated part number.

- (1) Schematic diagrams ... Indicated by the \triangle mark.
- (2) Parts lists ... Indicated by the \triangle mark.

Using parts other than the designated parts could result in electric shock, fires or other dangerous situations.

DIMENSION

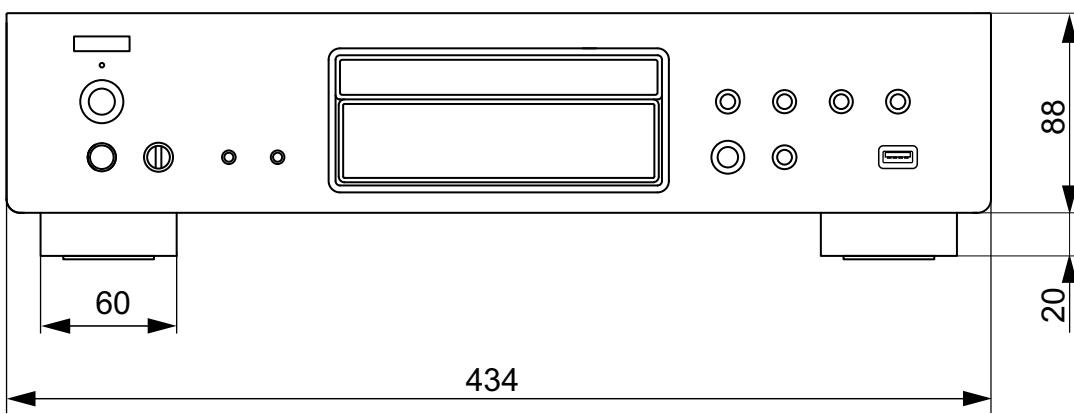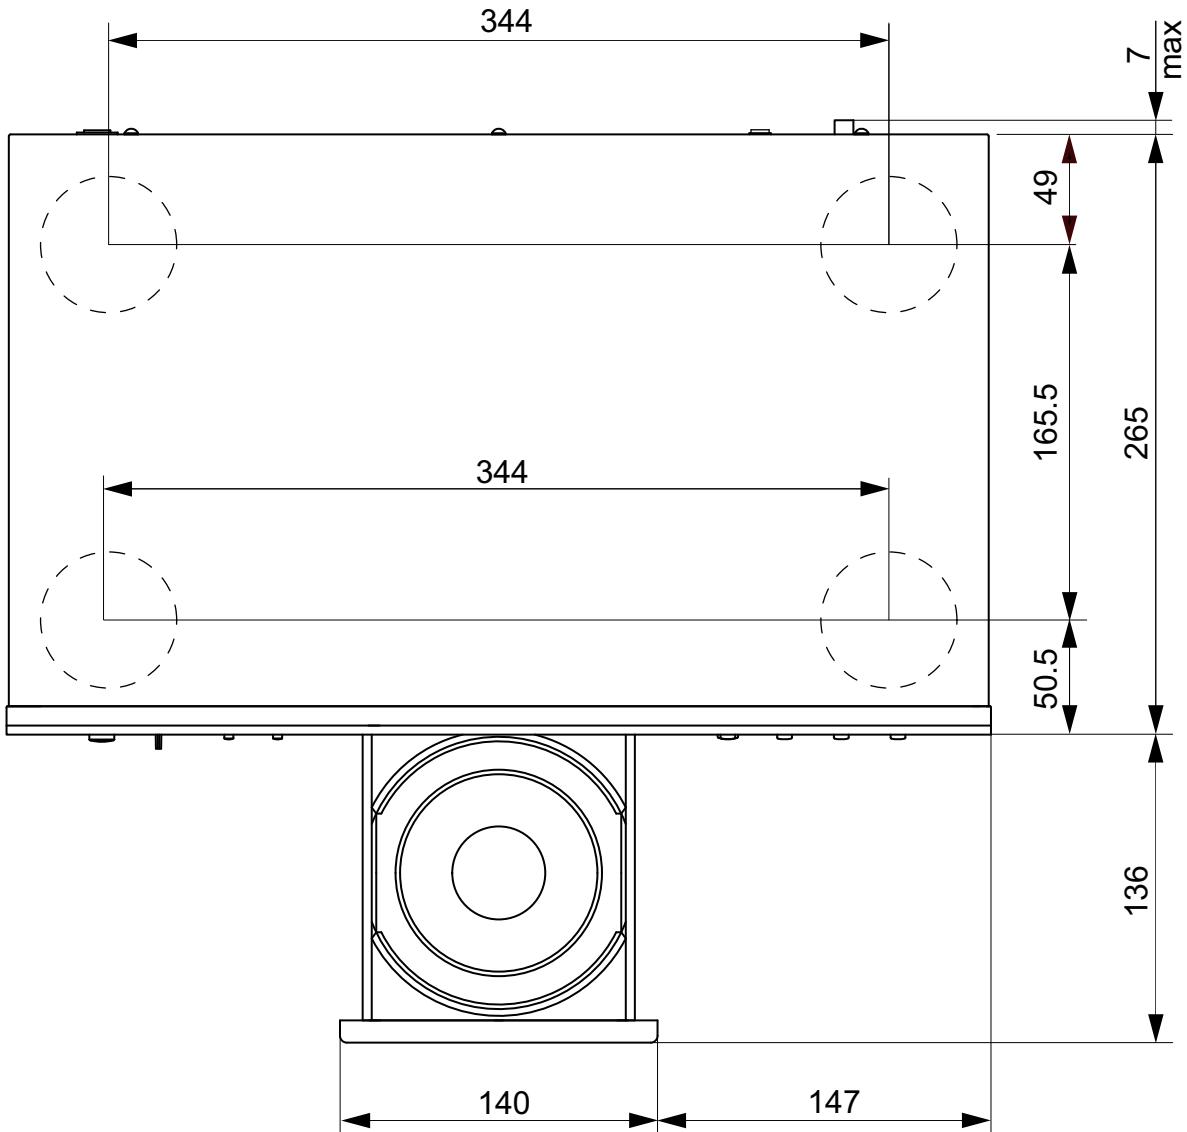

WIRE ARRANGEMENT

If wire bundles are untied or moved to perform adjustment or parts replacement etc.,be sure to rearrange them neatly as they were originally bundled or placed afterward.

Otherwise, incorrect arrangement can be a cause of noise generation.

Wire arrangement viewed from the top


Front Panel side



Back Panel side

DISASSEMBLY

- Disassemble in order of the arrow of the figure of following flow.
- In the case of the re-assembling, assemble it in order of the reverse of the following flow.
- In the case of the re-assembling, observe "attention of assembling" it.

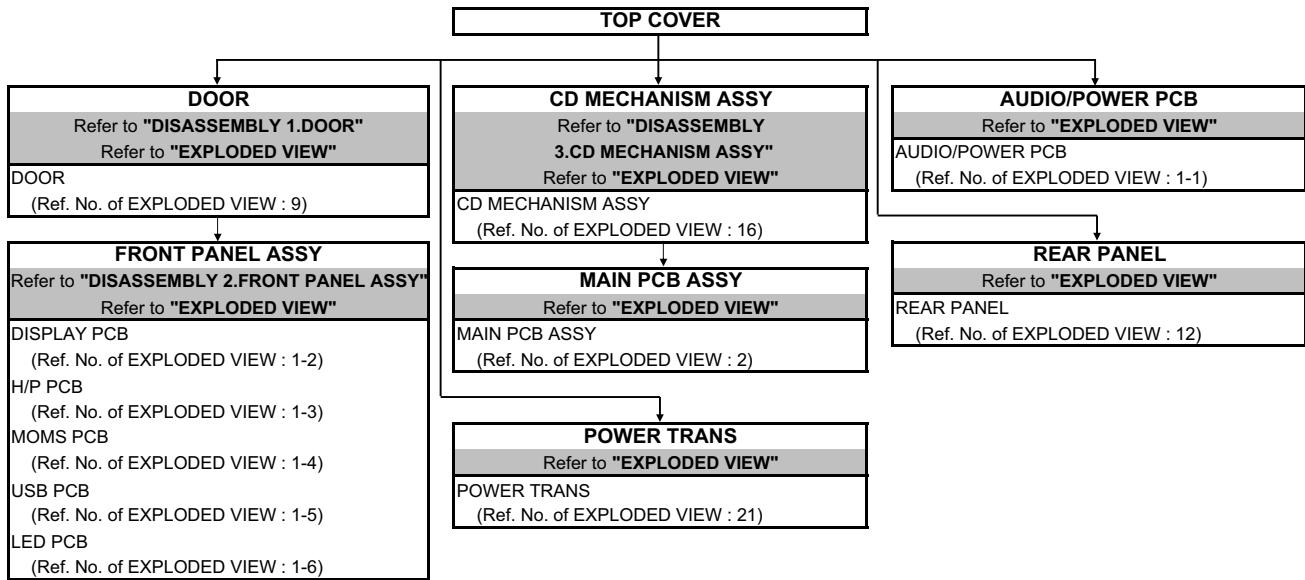


About the photos used for descriptions in the “DISASSEMBLY” section.

- The direction from which the photographs used herein were photographed is indicated at "Direction of photograph: ****" at the left of the respective photographs.
- Refer to the table below for a description of the direction in which the photos were taken.
- Photographs for which no direction is indicated were taken from above the product.

The viewpoint of each photograph (photography direction)

[View from above]

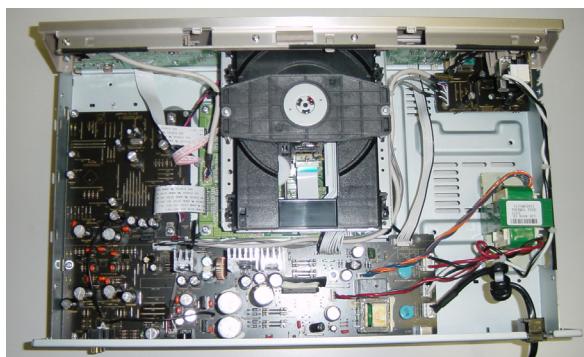

Front side




Direction of photograph: A




1. DOOR

Proceeding : **TOP COVER** → **DOOR**


- (1) Take off the Chucking plate after removing screws.

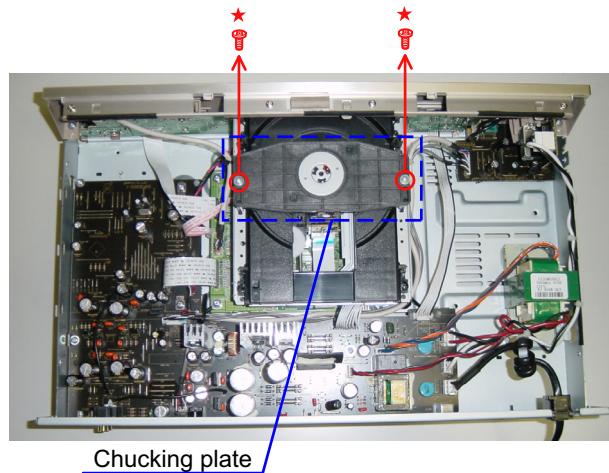

- (2) Open the CD tray by turning the Drive gear clockwise.

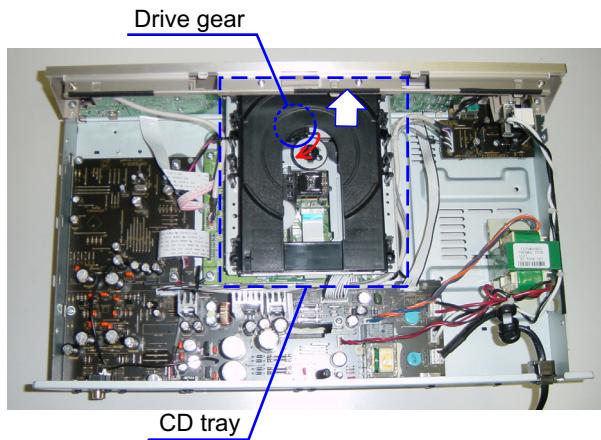


- (3) Detach the DOOR.

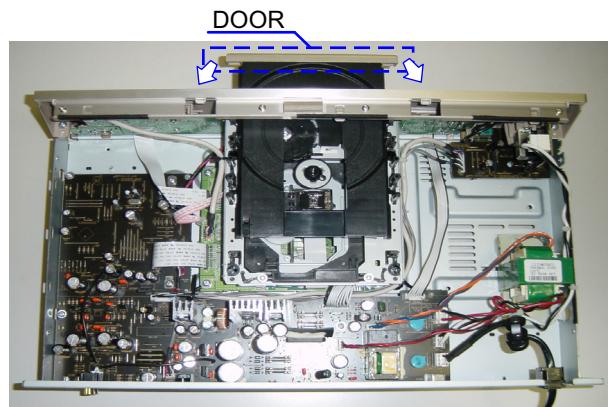


2. FRONT PANEL ASSY

Proceeding : **TOP COVER** → **DOOR** → **FRONT PANEL ASSY**

- (1) Remove the screws.

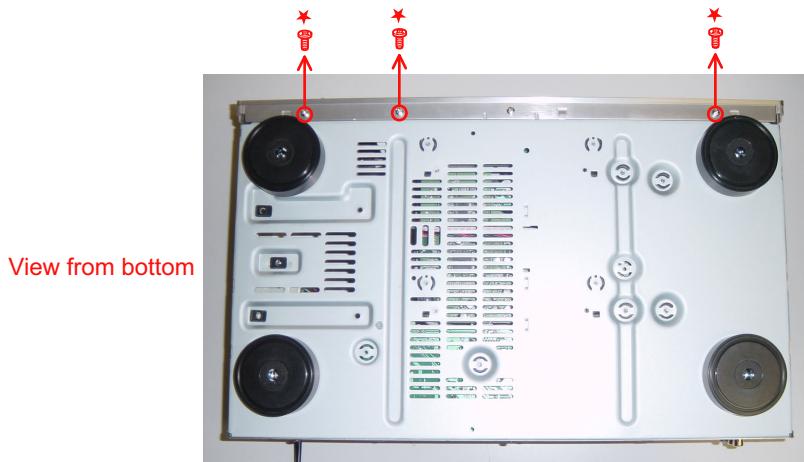

- (2) Cut the clamp bands, disconnect the connector wires and FFC Cable Remove the screws..

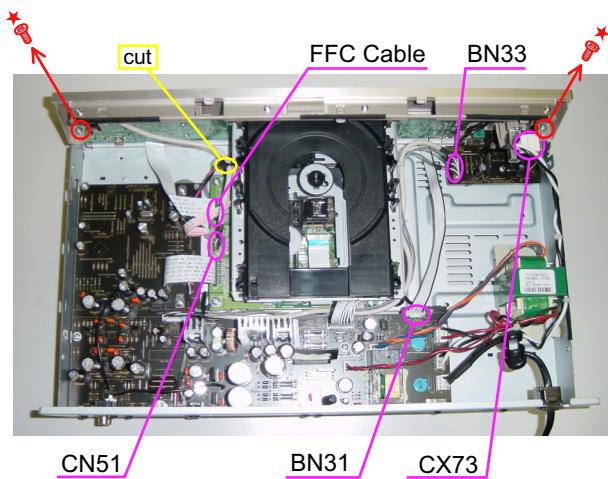


Please refer to "**EXPLODED VIEW**" for the disassembly method of each PCB included in FRONT PANEL ASSY.



3. CD MECHANISM ASSY

Proceeding : **TOP COVER** → **DOOR** → **CD MECHANISM ASSY**

- (1) Cut the clamp bands, disconnect the connector wires. Remove the screws.

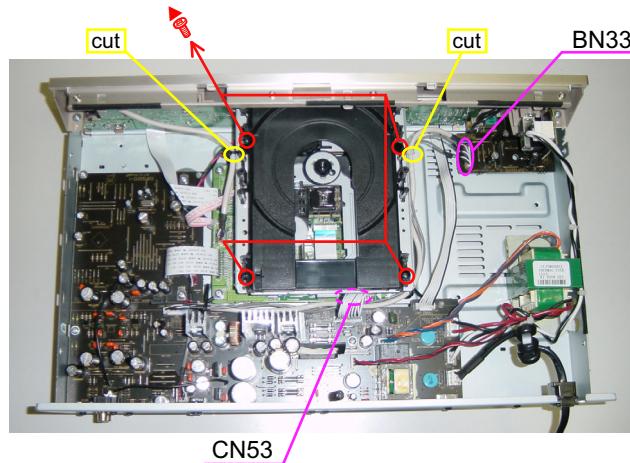

- (2) Laser short-circuit in Pick-up of CD MECHANISM, then disconnect the FFC Cable.

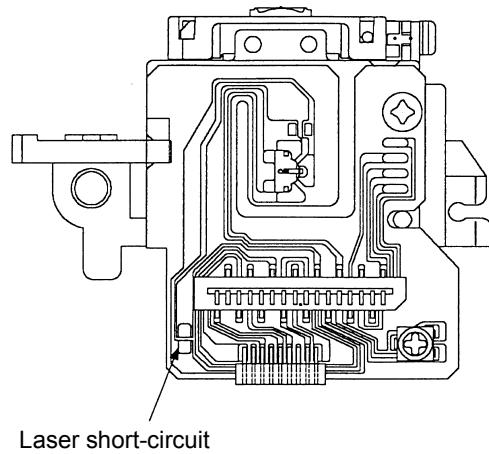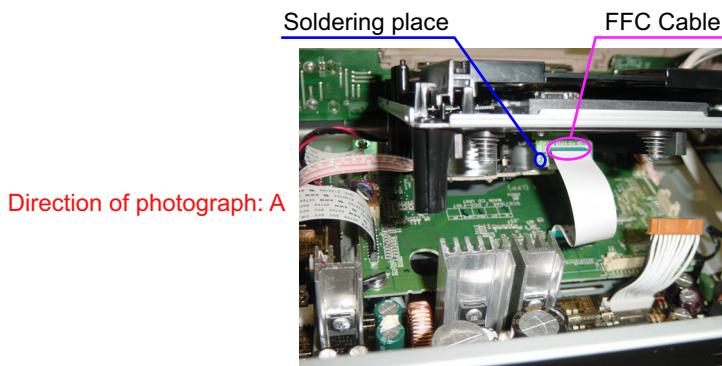


DISASSEMBLY OF MECHANIC

(Follow the procedure below in reverse order when reassembling.)

Caution : The optical pickup can be easily damaged by static electricity charged on human body. Take necessary anti-static measures when repairing around the optical pickup.

1. Chucking plate


- (1) Remove 2 top screws, then detach the Chucking plate.
- (2) Detaching the Chucking pulley and chucking yoke by removing the 3 hooks, when abandoning CD MECHA ass'y.

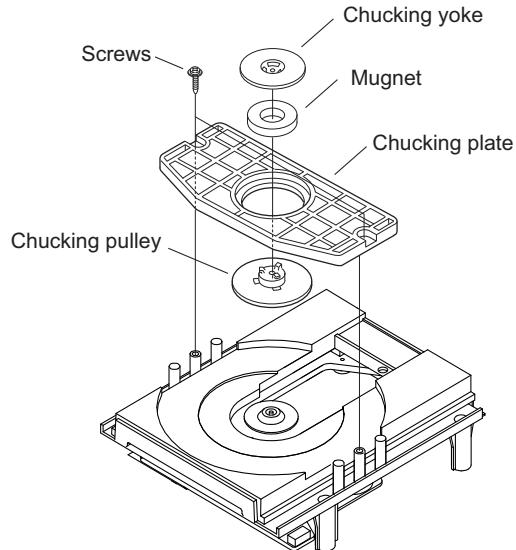

2. CD tray

When abandoning CD MECHA ass'y, please detach the CD tray.

- (1) Detach the Sw pin on the CD tray.
- (2) Open the CD tray by turning the Drive gear clockwise.
- (3) Open the Stopper as shown in the fig., then detach CD tray.

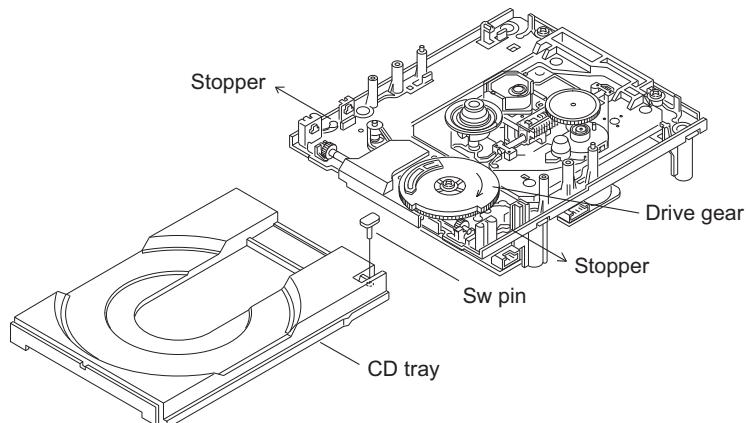

Note Handling and Replacement of the Laser pick-up

1. Protection of the LD

Short a part of the LD circuit by soldering. After connection to a circuit, remove the short solder.

2. Precautions when handling the laser CD mechanism


- Handle the laser pick-up so that it is not exposed to dust.
- Do not leave the laser pick-up bare. Be sure to cover it.
- If dust adheres on lens of the pick-up, blow it off with a blower brush.
- Do not shock the laser pick-up.
- Do not watch the light of the laser pick-up.

3. Cautions on assembling and adjustment

- Be sure that to the bench, jig, head of soldering iron (with ceramic) and measuring instruments are well grounded.
- Workers who handle the laser pick-up must be grounded.
- The finished mechanism (prior to anchoring in the set) should be protected against static electricity and dust. The mechanism must be stored so that damaging outside forces are not received.
- When carrying the finished mechanism, hold it by the chassis body
- For proper operation, storage and operating environment should not contain corrosive gases. For example H₂S, SO₂, NO₂, Cl₂ etc. In addition storage environment should not have materials that emit corrosive gases especially from silicic, cyanic, formalin and phenol group. If the mechanism or the set, existence of corrosive gases may cause no rotation in motor.








4. Determining whether the laser pick-up is defective








- Measure the waveform at RFO-VC on "MCU P.W.B. Unit".
(For measuring points and waveforms, see pages 21.)
- The laser pick-up is OK if the amplitude level of the measured RFO waveform is between 0.4 and 1.1 Vp-p, defective otherwise.

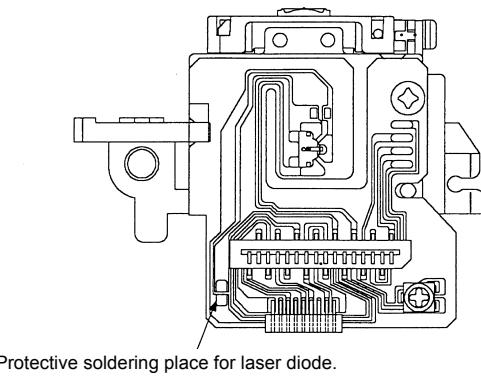







SPECIAL MODE





No	Key name	Function	Display
1	Service mode	<ul style="list-style-type: none"> POWER switch is turned to on while pressing the ▲ and ■ button same time on DCD-710AE.(Model name display) 	
1.1	Version No. of main μ-com Display mode	<ul style="list-style-type: none"> Press the ►►I button. 	 ***** : Version number of main μ-com
1.2	Version No. of USB μ-com Display mode	<ul style="list-style-type: none"> Press the ►►I button while version No. of main μ-com is displayed. 	 ***** : Version number of USB μ-com
1.3	FLD check mode	<ul style="list-style-type: none"> When display is version No. of USB μ-com and the ►►I button is pressed, turn on the entire display is flashing with an interval of about 1 second. Press the ►►I button again in the turn on each grid of FLD. (Each grid is displayed at interval of 1 second.) 	
1.4	Input button name Display mode	<ul style="list-style-type: none"> When display is each grid of the FLD check mode and the ►►I button is pressed, display name of the pressing button. Turn off the POWER switch to clear this mode. 	
2	CD test mode	<ul style="list-style-type: none"> POWER switch is turned to on while pressing the ▲ and ■ button same time on DCD-710AE.(Entering the Service mode) Press the ►/II and ■ button same time while service mode.(CD TEST MODE display) 	►II flashing
2.1	Disc loading	<ul style="list-style-type: none"> Press the ▲ button to open the tray. Set a disc on the tray, then press the ▲ button again to close the tray. 	
2.2	Servo check	<ul style="list-style-type: none"> Press the ►/II button. Execute the following steps. ① LD ON (with servo still stopped) ② FOCUS ON (disc rotation, tracking off) If no disc loaded, retry then stop. ③ CLV ON 	<ul style="list-style-type: none"> ►II flashing <p>①</p> <p>②</p> <p>③</p>




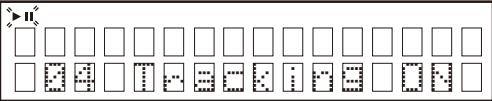




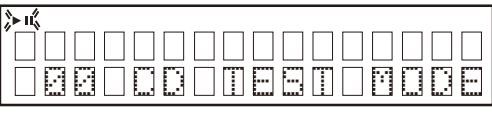
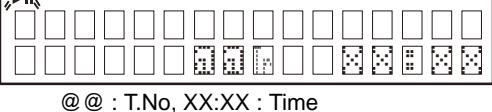
No	Key name	Function	Display
2.2	Servo check	<p>④ TRACKING ON</p> <p>⑤ SUB CODE readout (playback sound output)</p> <ul style="list-style-type: none"> The BER (Block Error Rate) generated in 1 second's time is displayed on the upper tier of the display. The playback position (IN/MID/OUT) can be changed by pressing the $\blacktriangleleft\blacktriangleright$ or $\blacktriangleright\blacktriangleright$ button. The count of the errors that could not be corrected with the C1 error correction system is displayed. <p>⑥ When display is as in ⑤ and the $\blacktriangleright/\blacktriangleright\blacktriangleright$ button is pressed, conduct BER (Block Error Rate) display for 2 seconds.</p> <ul style="list-style-type: none"> The BER (Block Error Rate) generated in 10 second's time is displayed of the display. <p>※Press $\blacktriangleright/\blacktriangleright\blacktriangleright$ button continuously for over 1 second to switch directly to SUB CODE readout in step ⑤.</p>	<p>④</p>  <p>⑤</p> <p>[IN]</p>  <p>[MID]</p>  <p>[OUT]</p>  <p>##### : B.E.R., @@ : T.No, XX:XX : Time</p> <p>⑥</p>  <p>PPP : Playback position (IN/MID/OUT) ##### : 1 second's B.E.R., *****: 10 second's B.E.R.</p>
2.3	Pickup movement	<ul style="list-style-type: none"> In the stop mode, pickup moves in REV (inwards) or FWD (outwards) direction when $\blacktriangleleft\blacktriangleright$ or $\blacktriangleright\blacktriangleright$ button pressed. When $\blacktriangleleft\blacktriangleright$ button pressed, move to stop operation after detection that inner switch has turned on. Pickup movement stops when button released. (Pickup moves while button is pressed.) 	Continuous display of previous time
2.4	Stop	<ul style="list-style-type: none"> When \blacksquare button is pressed, play operation and servo stop. After stopping, conduct reading of auto adjust values. 	<ul style="list-style-type: none"> $\blacktriangleright\blacktriangleright$ flashing 
2.5	All servo on	<ul style="list-style-type: none"> When \blacksquare and \blacktriangle button is pressed, all servos turn on, auto adjustment is performed and switch to playback operation. (Playback sound output) <p>(NOTE)When the \blacksquare button is pressed for over 1 second while the laser turns on and the laser current is measured.</p>	<ul style="list-style-type: none"> $\blacktriangleright\blacktriangleright$ flashing  <p>@@ : T.No, XX:XX : Time</p>

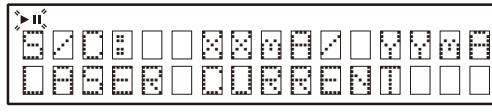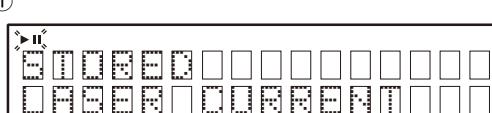
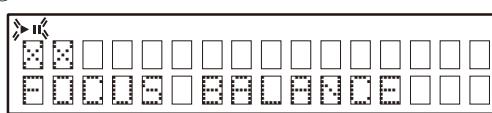
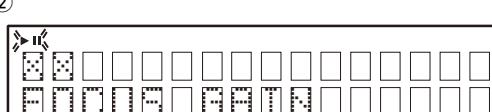
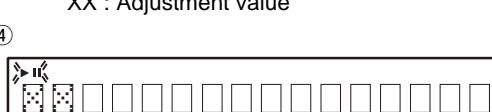
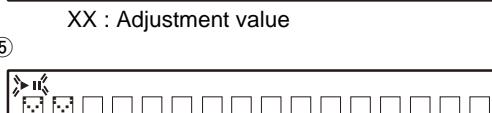
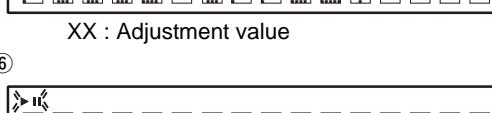
No	Key name	Function	Display
2.6	Laser current is display	<ul style="list-style-type: none"> When the ■ button is pressed for over 1 second while the DCD-710AE is in the stop mode, the laser turns on and the laser current is measured. The laser drive current undergoes A/D conversion for calculation. Decimal values are discarded. The first current value is measured 3 seconds after the laser turns on. The current value is updated every 3 seconds. Press the ■ button, CD test mode display (2) reappears. Stored data is not cleared, even when the DCD-710AE is reset. <p>① Overwriting the stored data</p> <ul style="list-style-type: none"> When the ►/■ button is pressed for over 5 seconds while the laser current is displayed, the current value is stored in the EEPROM (overwriting the stored data). Once rewriting is completed, the display in 2.6 reappears. 	<ul style="list-style-type: none"> ►■ flashing  <p>XX : Stored data : EEPROM Stored value YY : Current value</p> <p>①</p>  <p>XX : Adjustment value</p>
2.7	Adjustment value display	<ul style="list-style-type: none"> Press the ■ button after executing the servo auto adjustment. When ►■ button is pressed, the adjustment values are displayed in the following order. <p>① FOCUS BALANCE</p> <p>② FOCUS GAIN</p> <p>③ TRACKING BALANCE</p> <p>④ TRACKING GAIN</p> <p>⑤ FOCUS OFFSET</p> <p>⑥ TRACKING OFFSET</p>	<ul style="list-style-type: none"> ►■ flashing <p>①</p>  <p>XX : Adjustment value</p> <p>②</p>  <p>XX : Adjustment value</p> <p>③</p>  <p>XX : Adjustment value</p> <p>④</p>  <p>XX : Adjustment value</p> <p>⑤</p>  <p>XX : Adjustment value</p> <p>⑥</p>  <p>XX : Adjustment value</p>

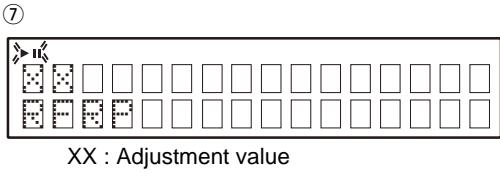No	Key name	Function	Display
2.7	Adjustment value display	<p>⑦ RFRP</p> <p>⑧ Return to ①.</p> <p>(Note) If auto adjustment is not completed, proper values are not displayed.</p>	 <p>⑦ XX : Adjustment value</p>
2.8	Accumulated laser on time display	<ul style="list-style-type: none"> When the DISC/USB and ▲ button is pressed while the DCD-710AE is in the stop mode, the accumulated laser on time is displayed. The laser drive times are added and the result is displayed. One count corresponds to 10 minutes. (Values under 10 minutes are discarded.) Count values are stored in the EEPROM every 10 minutes. The accumulated laser on time is displayed in hours. Laser ON/OFF is monitored and counted. Press the ■ button, CD test mode display (2) reappears. The count values are not cleared, even when the set is reset. Minimum display specification <ul style="list-style-type: none"> No. digits stored in EPROM: 4, 0xFFFF No. digits displayed: 5 When the time exceeds 10922 hours, the stored data is not updated and the value is fixed to 0xFFFF. (The display is fixed to 10922 hours.) <p>① Count value is reset</p> <ul style="list-style-type: none"> When the ▶/■ button is pressed for over 5 seconds while the accumulated laser on time is displayed, the count value is reset. After resetting is completed, the display in 2.8 (00000 hours on the top line) reappears, and after 5 seconds the model name display reappears. Count value is reset upon shipment from the factory and when the mechanism is replaced. 	<p>• ▶/■ flashing</p>  <p>①</p>
3	CD heat run mode	<ul style="list-style-type: none"> AC is turned on while pressing the ▲ and ■ button same time on Main Unit. Switches to mode according to button input. Press a reverse button to switch the mode while displaying the version of the main μcom. (Normal heat run mode, Heat run short mode, Automatic mounting mode.) If an error occurs, display the error and stop operation at that point. Number of operations held. While heat run, the operation of each button is not valid except the ON/STANDBY button and pressing the ▲ and ■ button same time. 	


No	Key name	Function	Display
3.1	Normal heat run mode	<ul style="list-style-type: none"> Press the ▶/II button while name of the model is displayed or H.R.NORMAL is displayed. Count this as the 0th heat run repetition. <p>① Play from the first to last track on disc.</p> <p>② After disc playback has finished, move pickup to innermost position and open tray.</p> <p>③ When loader open status detected, close tray again, re-read TOC and start playback from the first track on the disc.</p> <p>④ The heat run repetition no. is incremented (increased by 1) when the tray is opened. If the ■ and ▲ button is pressed while operating, number of heat run is displayed for 3 seconds.</p> <p>⑤ Conduct ① to ③ repeatedly.</p>	<ul style="list-style-type: none"> Model Name display H.R.NORMAL display  <ul style="list-style-type: none"> Normal heat run mode Normal display except when ▶ light, II flashing <p>① Normal display except when ▶ light, II flashing</p> <p>②</p>  <p>XXXX : No. of heat run repetitions</p> <p>③ Normal display except when ▶ light, II flashing</p> <p>④</p>  <p>XXXX : No. of heat run repetitions</p>
3.2	Heat run Short mode	<ul style="list-style-type: none"> Press the ▶/II button while name of the H.R.SHORT is displayed. Count this as the 0th heat run repetition. <p>① Play the last track only on disc.</p> <p>② After disc playback has finished, move pickup to innermost position and open tray.</p> <p>③ When loader open status detected, close tray again, re-read TOC and start playback from the first track on the disc.</p> <p>④ The heat run repetition no. is incremented (increased by 1) when the tray is opened. If the ■ and ▲ button is pressed while operating, number of heat run is displayed for 3 seconds.</p> <p>⑤ Conduct ① to ③ repeatedly.</p>	<ul style="list-style-type: none"> H.R.SHORT display  <ul style="list-style-type: none"> Heat run Short mode Normal display except when ▶ light, II light <p>① Normal display except when ▶ light, II light</p> <p>②</p>  <p>XXXX : No. of heat run repetitions</p> <p>③ Normal display except when ▶ light, II light</p> <p>④</p>  <p>XXXX : No. of heat run repetitions</p>

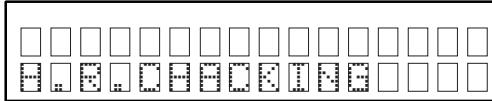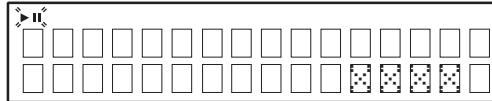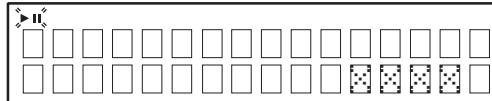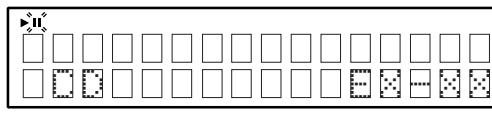No	Key name	Function	Display
3.3	Automatic mounting mode	<ul style="list-style-type: none"> Press the ▶/II button while name of the H.R.CHACKING is displayed. Count this as the 0th heat run repetition. <p>① Play the last track only on disc.</p> <p>② The heat run repetition no. is incremented (increased by 1) when the tray is opened. If the ■ and ▲ button is pressed while operating, number of heat run is displayed for 3 seconds.</p> <p>③ Conduct ① repeatedly.</p>	<ul style="list-style-type: none"> H.R.CHACKING display  <ul style="list-style-type: none"> Heat run short mode Normal display except when ▶ flashing, II flashing <p>① Number of heat run is display</p>  <p>XXXX : No. of heat run repetitions</p> <ul style="list-style-type: none"> READING, CLOSEdisplay Normal display except when ▶ flashing, II flashing <p>② Number of heat run is display</p>  <p>XXXX : No. of heat run repetitions</p>
3.4	Error display	E1-00: Disc cannot be detected E1-01: Tracking offset adjustment not possible E1-02: Focus offset adjustment not possible E2-00: Focus servo dropped during playback. E2-01: Focus servo dropped during searching. E2-03: Focus servo dropped during TOC reading. E2-05: Focus servo dropped during manual search. E2-10: Subcode can no longer be read during playback E2-11: Subcode can no longer be read during searching E2-12: Subcode can no longer be read during TOC reading E2-14: Subcode cannot be read during pause E2-15: Subcode cannot be read during manual search E3-00: TOC could not be read within specified time E3-01: PVD/SVD analysis could not be completed within specified time E4-04: Search time out E4-05: Error in communications with CD decoder E5-00: Inner switch not on E6-00: Inner switch not off E8-00: Tray is not opened by the specified time. E8-01: Tray is not closed by the specified time. E9-01: Other error	<ul style="list-style-type: none"> ▶, II with mode light or flashing  <p>X-XX : Error cord</p>

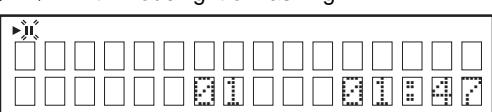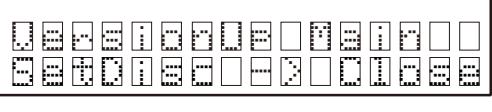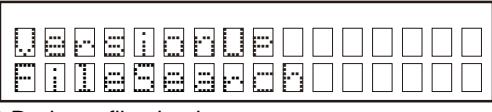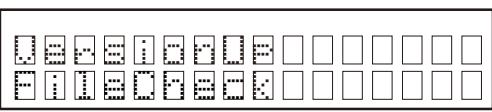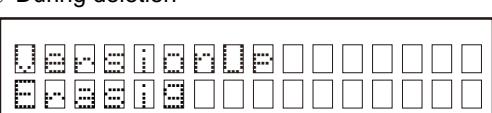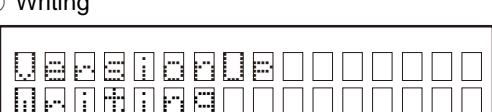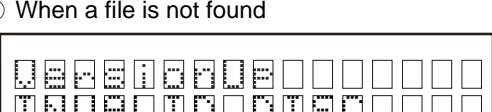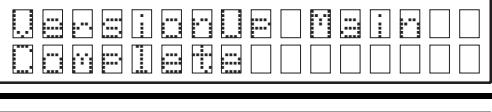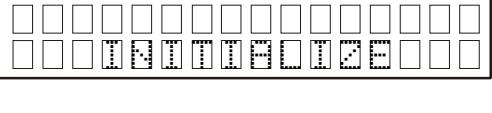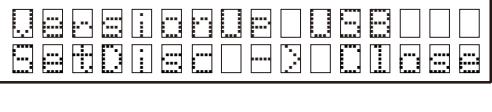No	Key name	Function	Display
3.4	Error display	<p>① Number of heat run is display • Press the ►► button while the error is displayed. • No. heat runs is displayed for 5 seconds, the error display reappears.</p> <p>② The track no. and time when the error occurred is displayed • Press the ▶◀ button while the error is displayed. • The track no. and time when the error occurred is displayed for 5 seconds, then error display reappears.</p>	<p>① ►, II with mode light or flashing</p>  <p>XXXX : No. of heat run repetitions</p> <p>• Error display reappears after 5 seconds. See 3.4.</p> <p>② ►, II with mode light or flashing.</p>  <p>• Error display reappears after 5 seconds. See 3.4.</p>
4	Main μ-com Version up mode	<ul style="list-style-type: none"> POWER switch is turned to on while simultaneously pressing ▲ and ■ button. While displaying model name, when ■ and the PITCH- button are pressed simultaneously, the tray opens. 	
4.1	Start version up	<ul style="list-style-type: none"> If an the ▲ or ►/ II button is pushed and a tray is closed, a disc will be loaded and Version up will be started. " INVALID DISC" is displayed when not found upgrade file and the tray is opened. 	<p>① During a file search</p>  <p>② During a file check</p>  <p>③ During deletion</p>  <p>④ Writing</p>  <p>⑤ When a file is not found</p> 
4.2	End version up	<ul style="list-style-type: none"> After Version UP is completed, a tray is opened and it stops in 	
5	Initialize	<ul style="list-style-type: none"> Press POWER SW while simultaneously pressing ▲ and ►► button. The system is reset, and once this is completed the unit is set to the normal mode. DIMMER : 100% PURE DIRECT : OFF DISC/USB : DISC REMOTE/BROWSE : REMOTE The laser current initial value and laser accumulated on time is not cleared. 	
6	USB μ-com Version up mode	<ul style="list-style-type: none"> Press POWER SW while simultaneously pressing ▲ and ■ button. While displaying model name, when ■ and the PITCH- button are pressed simultaneously, the tray opens. 	

No	Key name	Function	Display
6.1	Start version up	<ul style="list-style-type: none"> If an the ▲ or ▶/■ button is pushed and a tray is closed, a disc will be loaded and Version up will be started. "INVALID DISC" is displayed when not found upgrade file and the tray is opened. 	<p>① During a file search</p>  <p>② During a file check</p>  <p>③ During deletion</p>  <p>④ Writing</p>  <p>⑤ When a file is not found</p> 
6.2	End version up	<ul style="list-style-type: none"> After Version UP is completed, a tray is opened and it stops in 	
7	EEPROM TEST mode	<ul style="list-style-type: none"> Press POWER SW while simultaneously pressing PITCH- and DISC/US button. POWER LED lights to the orange (TEST start). MUTING ON After EEPROM TEST, in the case of OK, LED lights to the green. After EEPROM TEST, in the case of NG, LED lights to the red. Mode is cancelled with POWER OFF. 	

Special mode transition diagram

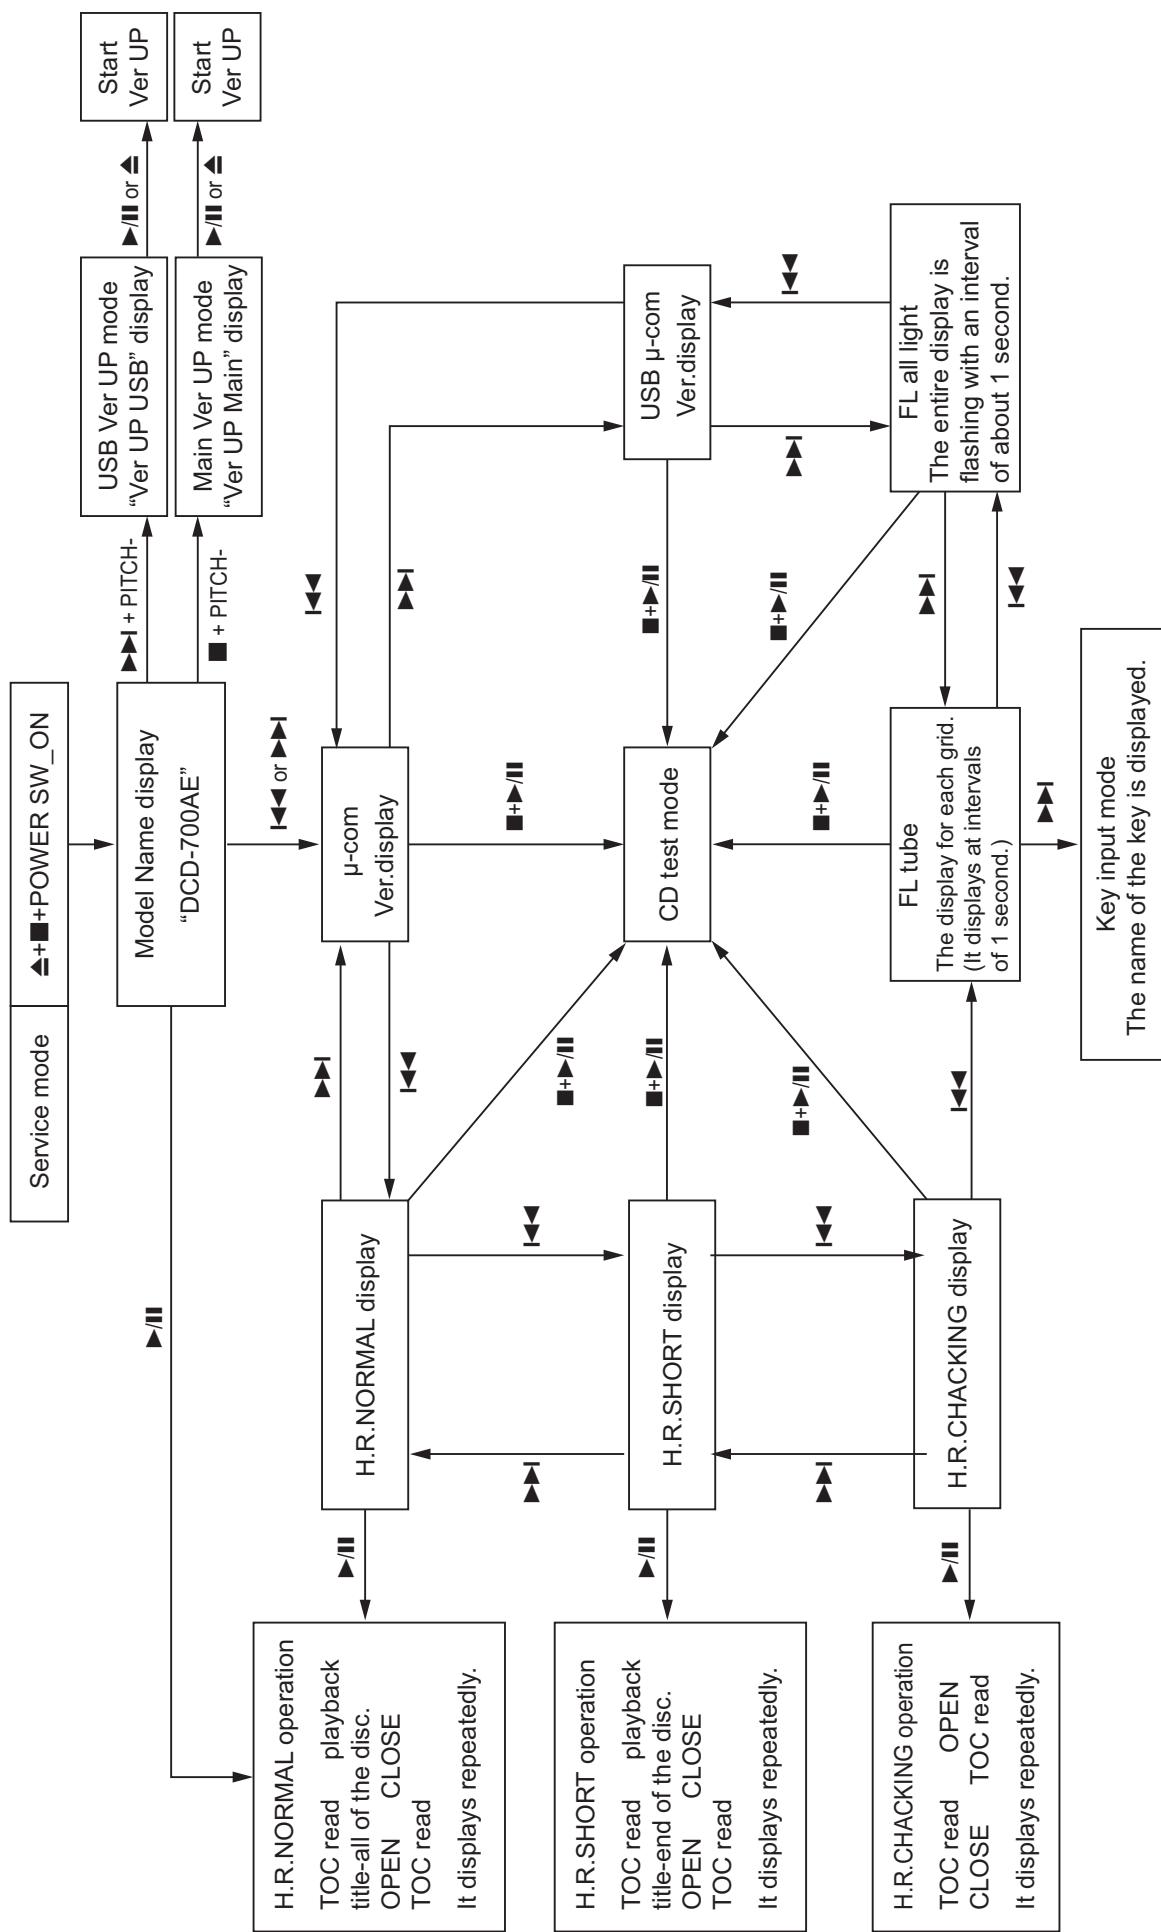

VERSION UPGRADE PROCEDURE OF FIRMWARE




Initial Version No.of main μ-com and USB μ-com.

- ① Main μ-com Ver 0035
- ② USB μ-com USB Ver 0014


※ When update Firmware, please confirm a last version in SDI.

1. Update for IC15(TMP92FD28AFG)

(1) Prepare the windows PC that installed the FlashProg.EXE.




(2) Connect SPK-581 as follows.

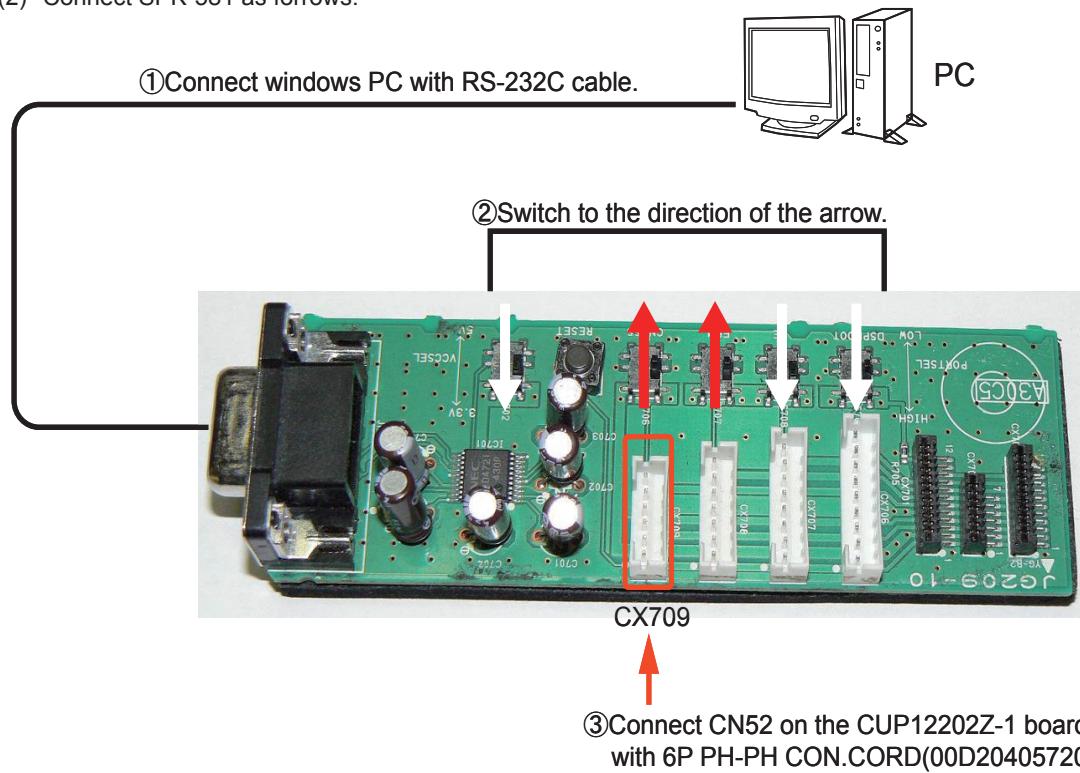


(3) Double click FlashProg.exe, and launch the FlashProgrammer.




- (4) Click the Setup in the menu bar and select the Setup File.

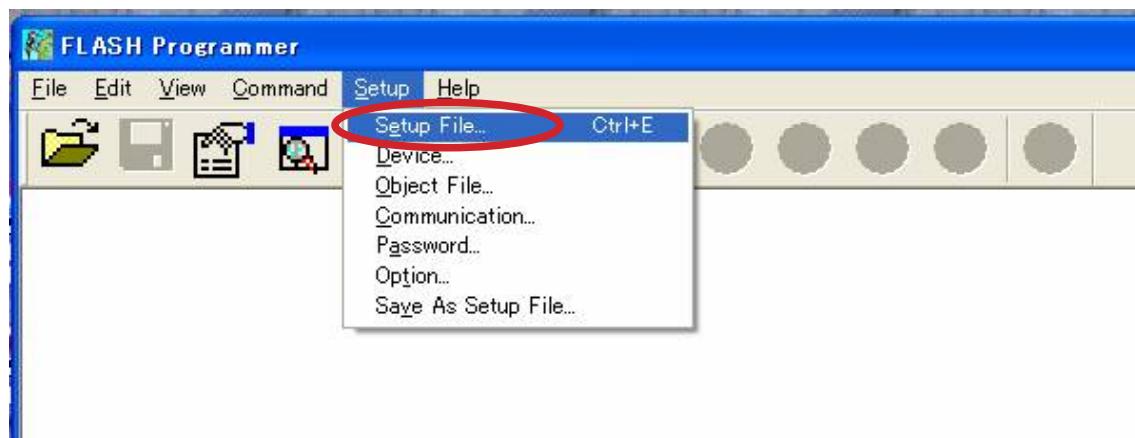


- (5) Click Device tab.

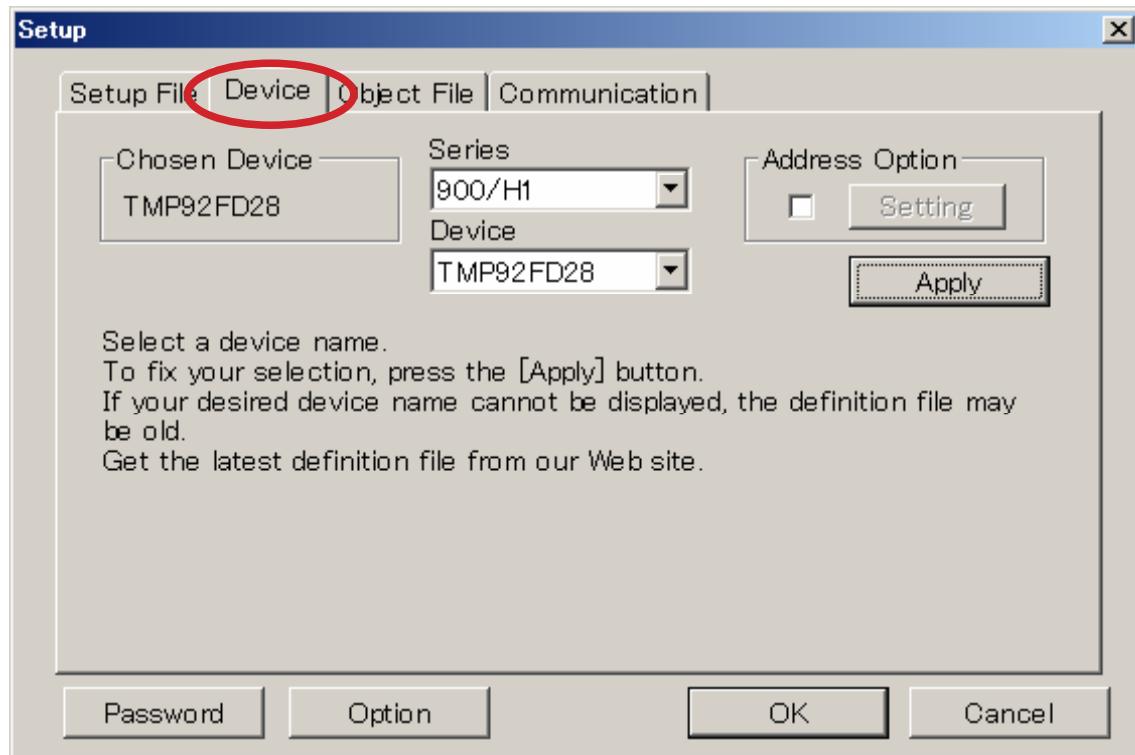

- (6) Choose the TMP91FD28 in the Device, and choose the 900/H1 in the Series.
Click Apply, and display the chosen Device.

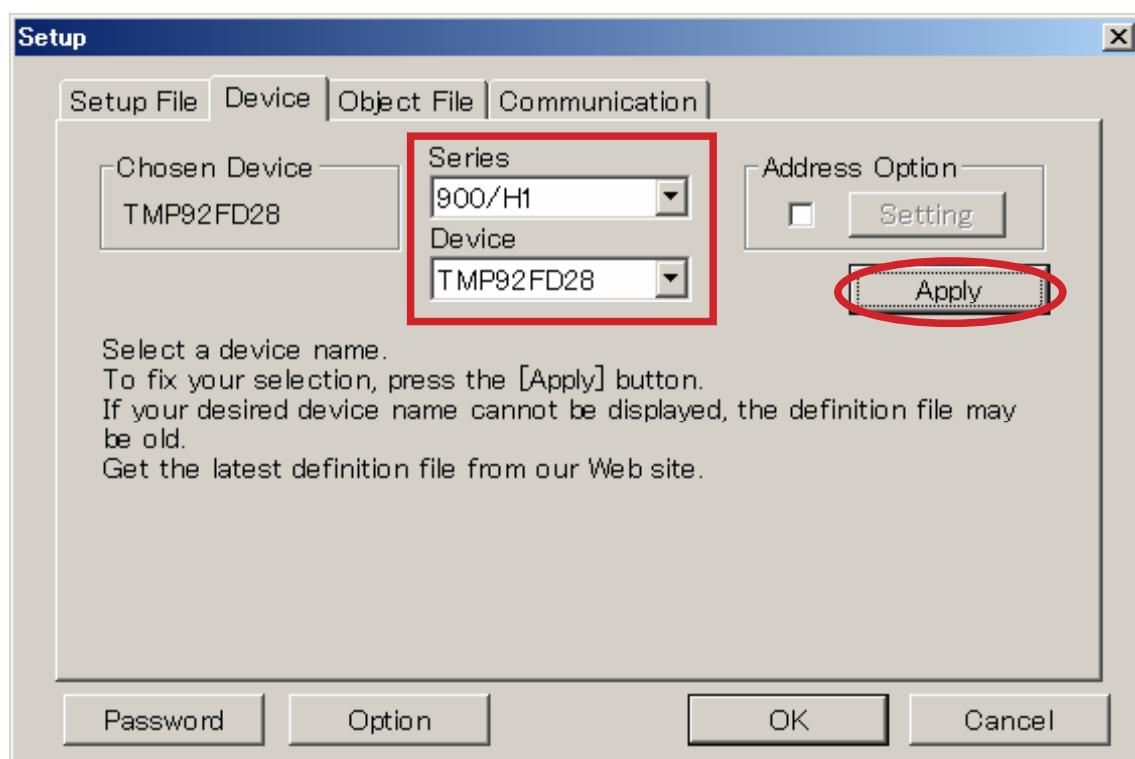


- (7) Click Password.

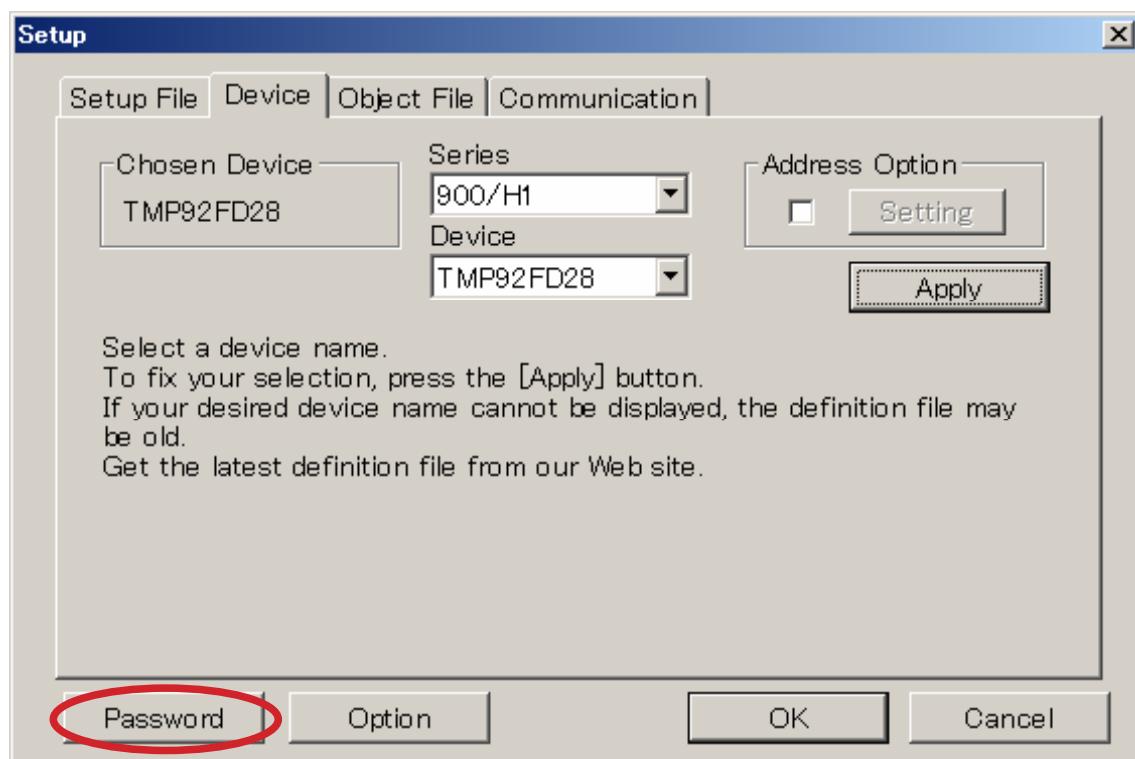


(8) Choose the Device is Blank.


And Click OK.

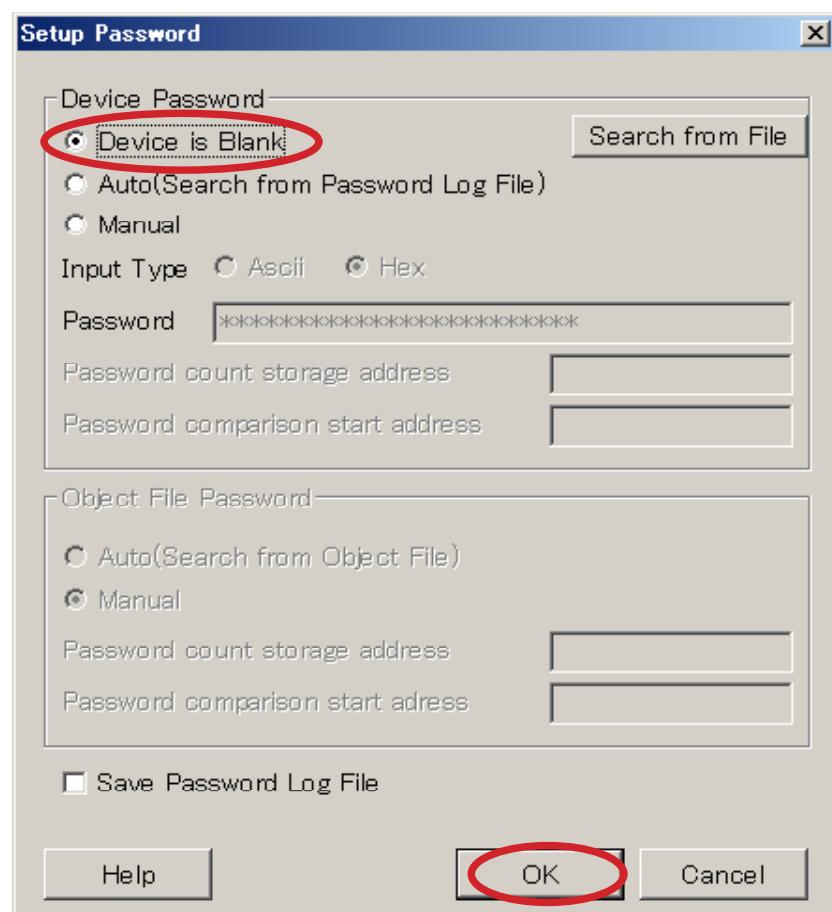


(9) Click Object File tab.

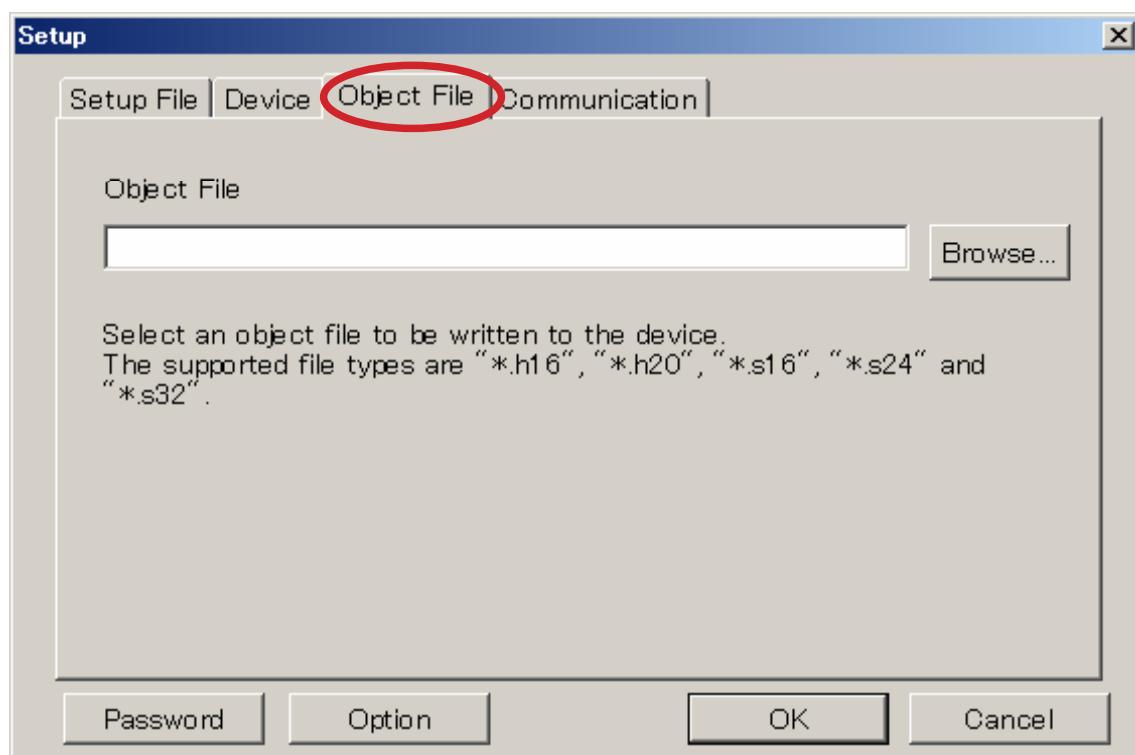


(10) Click Browse.

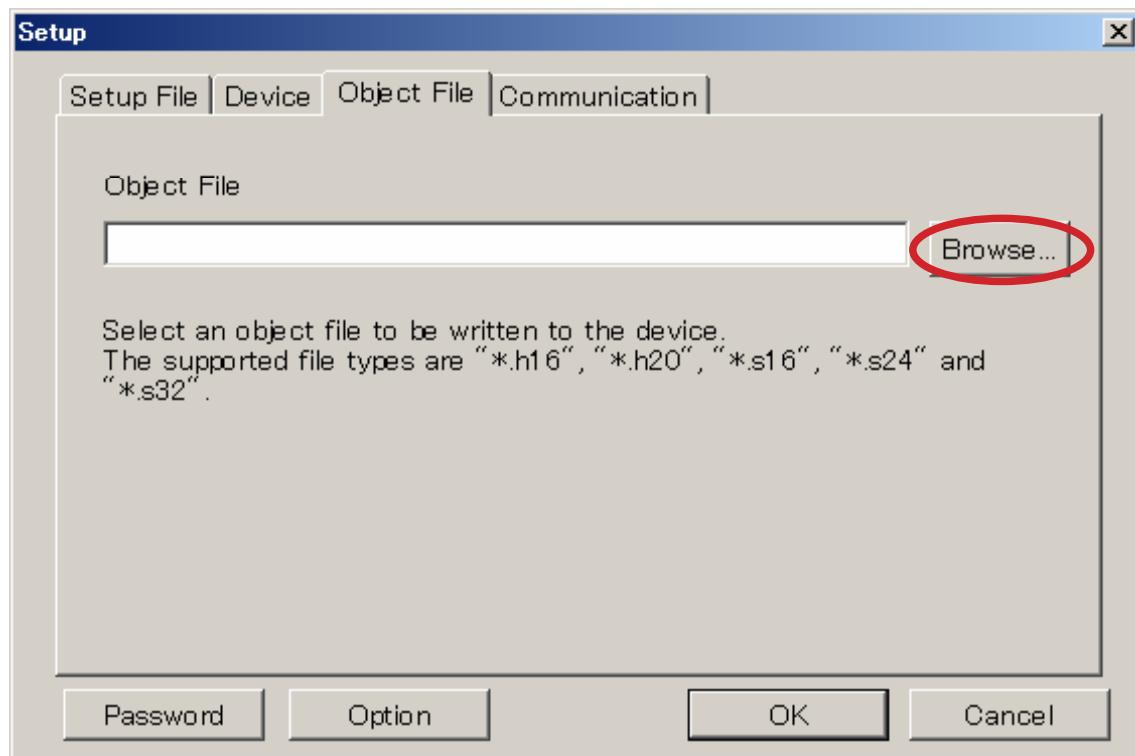


(11) Choose the Motorola S Format(*.s16,*.s24,*.s32) in Files of type.
Choose the BOLERO_ver014.s24, and click Open.

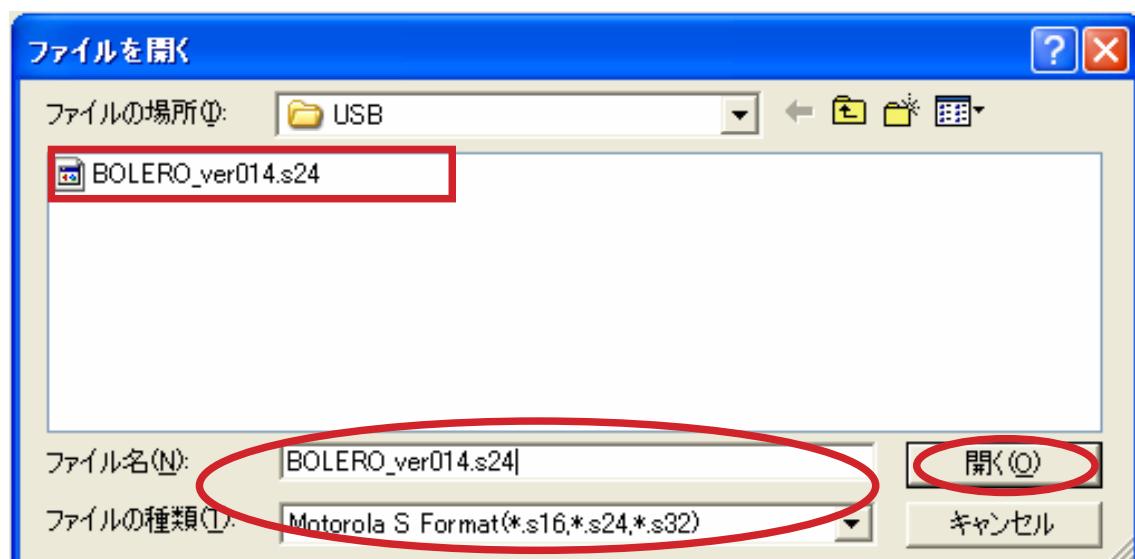


(12) The place of the file is displayed.

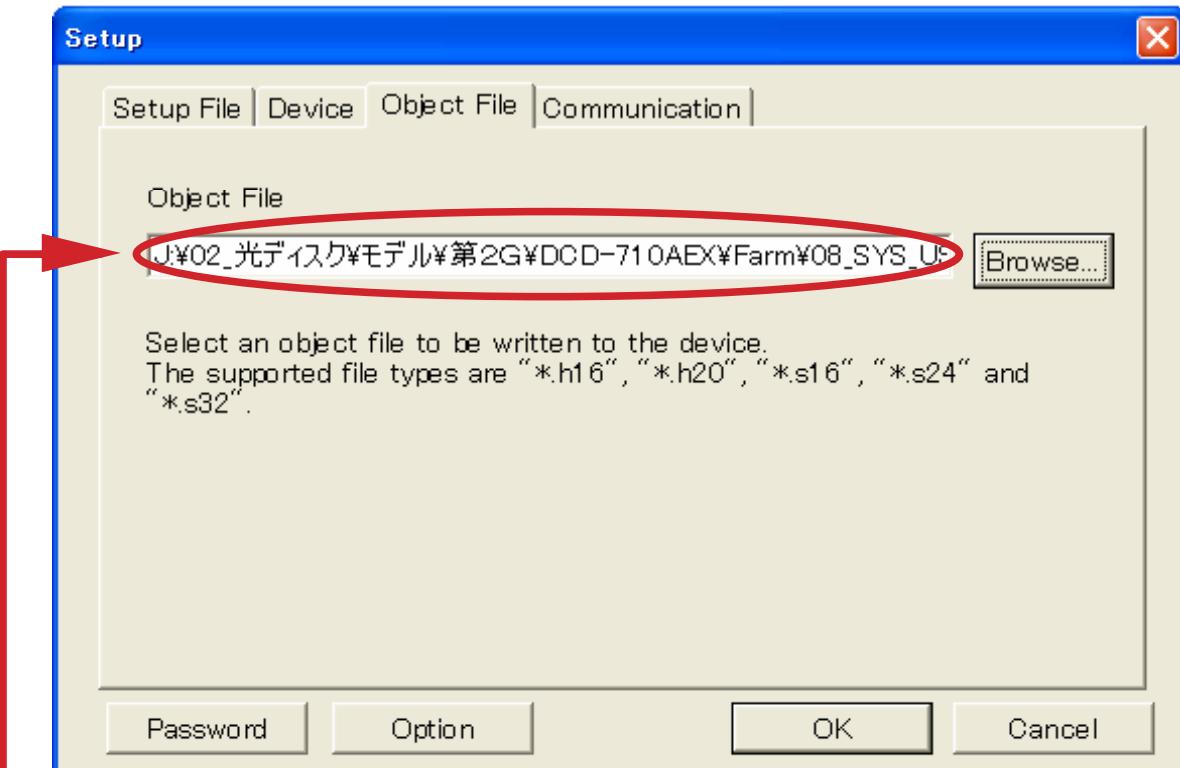


(13) Click Option.

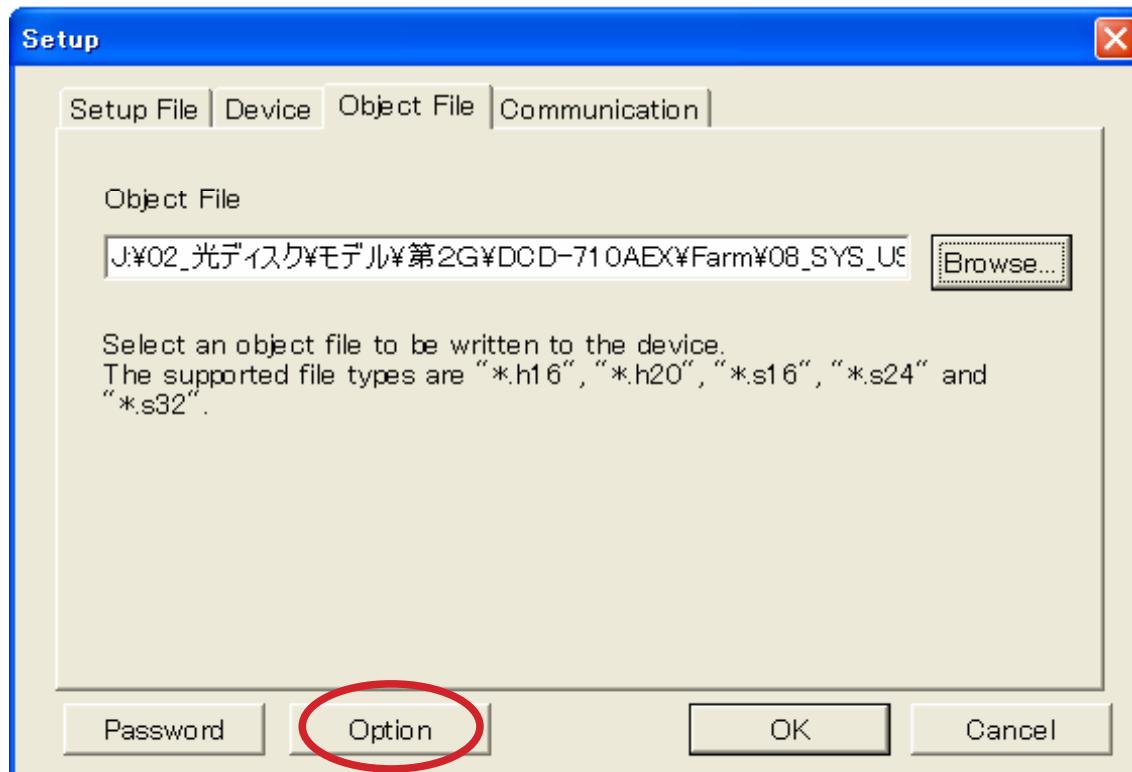


(14) Choose Erase Without Password (for 900 Family).
And Click OK.

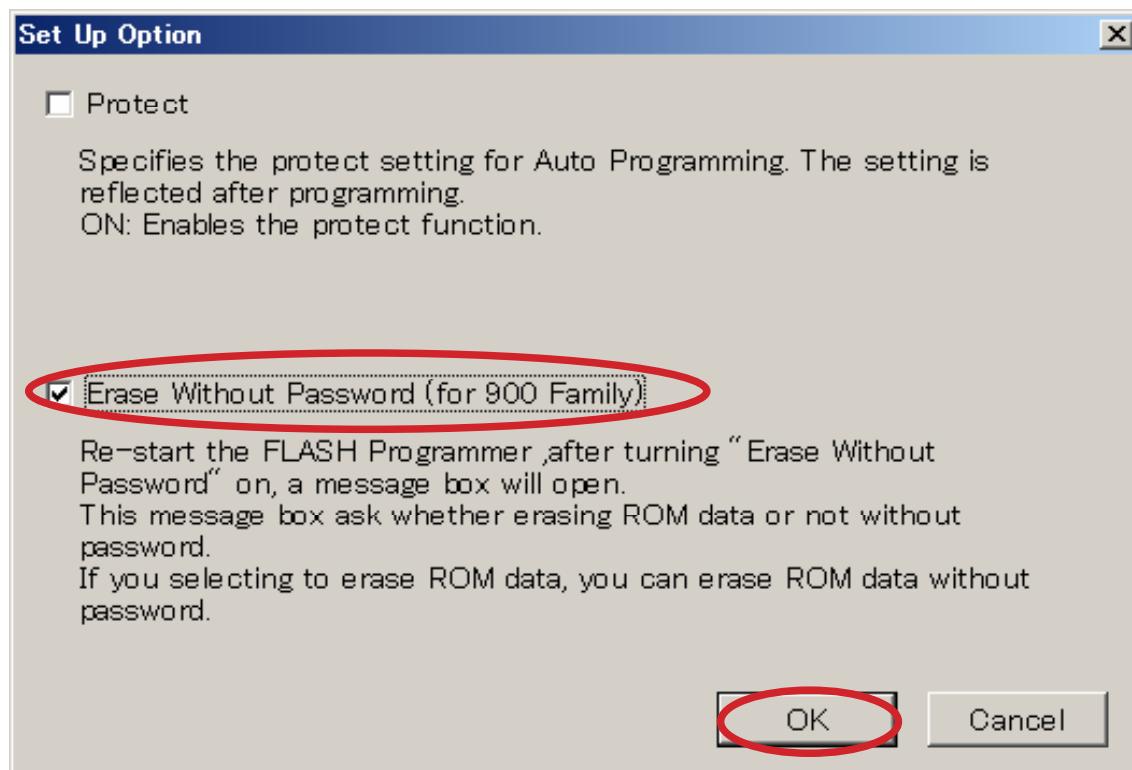

(15) Click Communication tab.

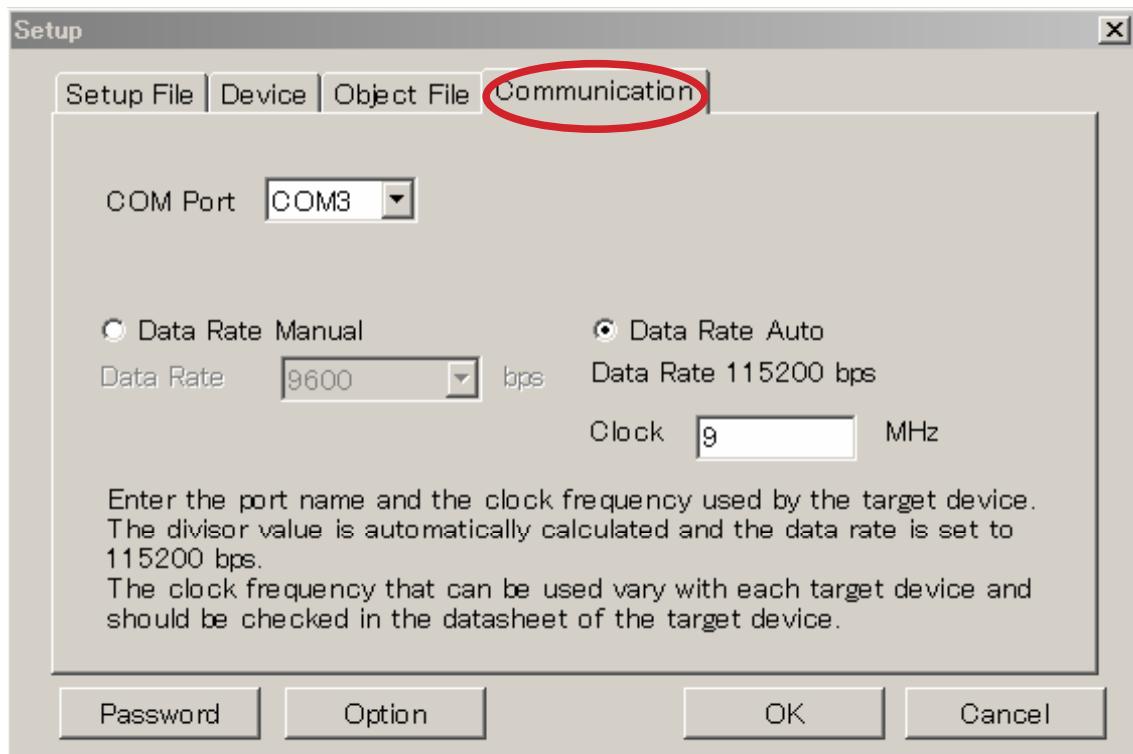


(16) Choose the Serial port number in the COM Port. Check the Data Rate Manual, and input 9 in the Clock. And Click OK.

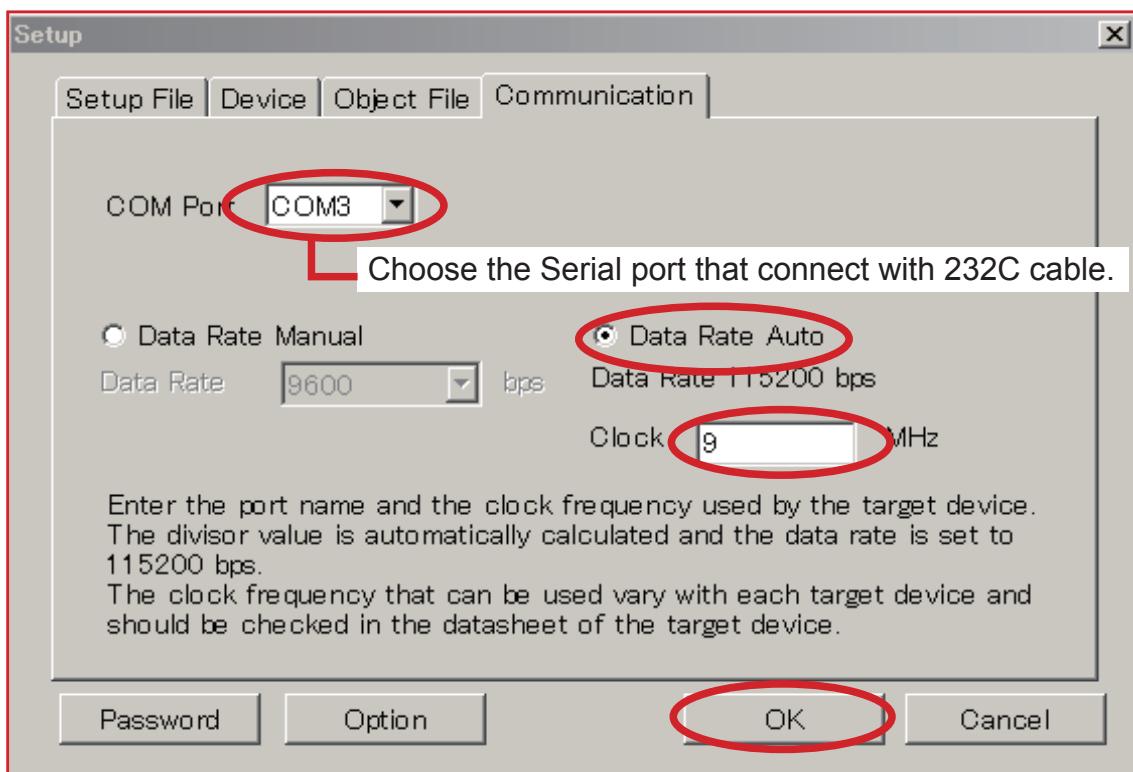

The setting is completed.


(17) Turn on DCD-710AE, and press the RESET button.

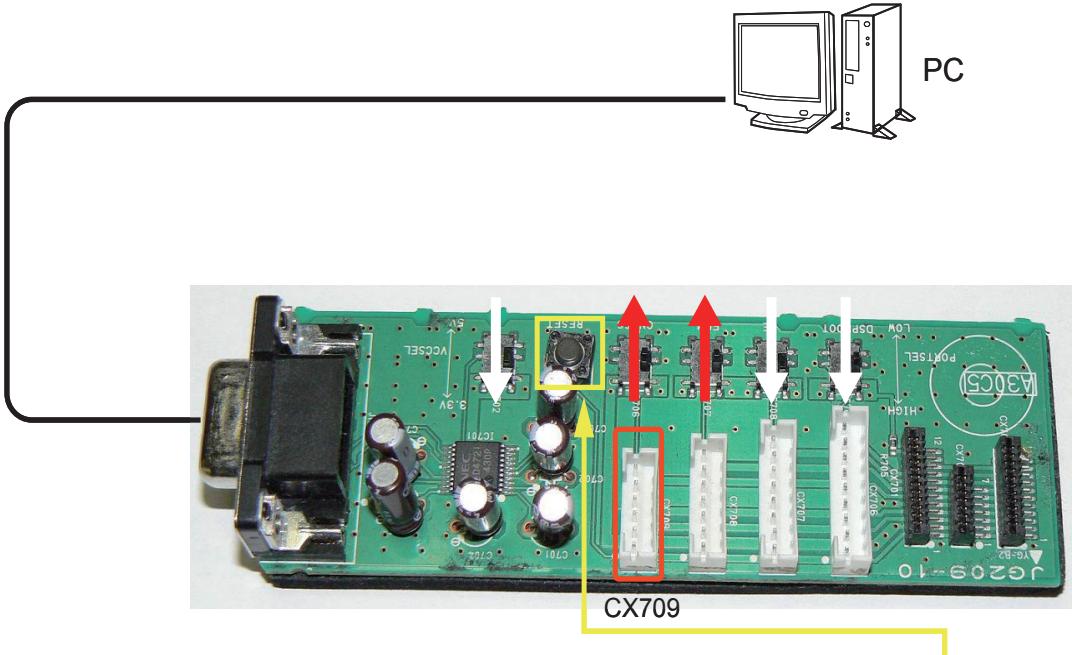

①Turn on DCD-710AE.
(Check connection CN53 on CUP12202Z-1.)

②Press the RESET button.

(18) If the connection with the Flash Programmer is successfully made, a dialogue box saying "Erase All data in this device? (Y/N)" appears automatically. If the connection fails, error message will appear. (Ex.: E000)

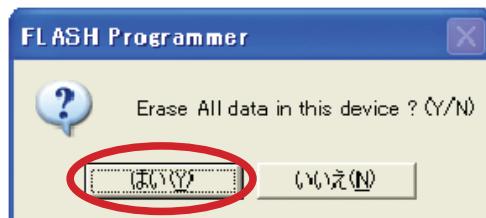

Click Yes.

(19) Click A (Auto Programming) to start writing.




(20) Turn off DCD-710AE.


(21) Remove the SPK-581 from DCD-710AE.

TROUBLE SHOOTING


FLOW CHART NO.1

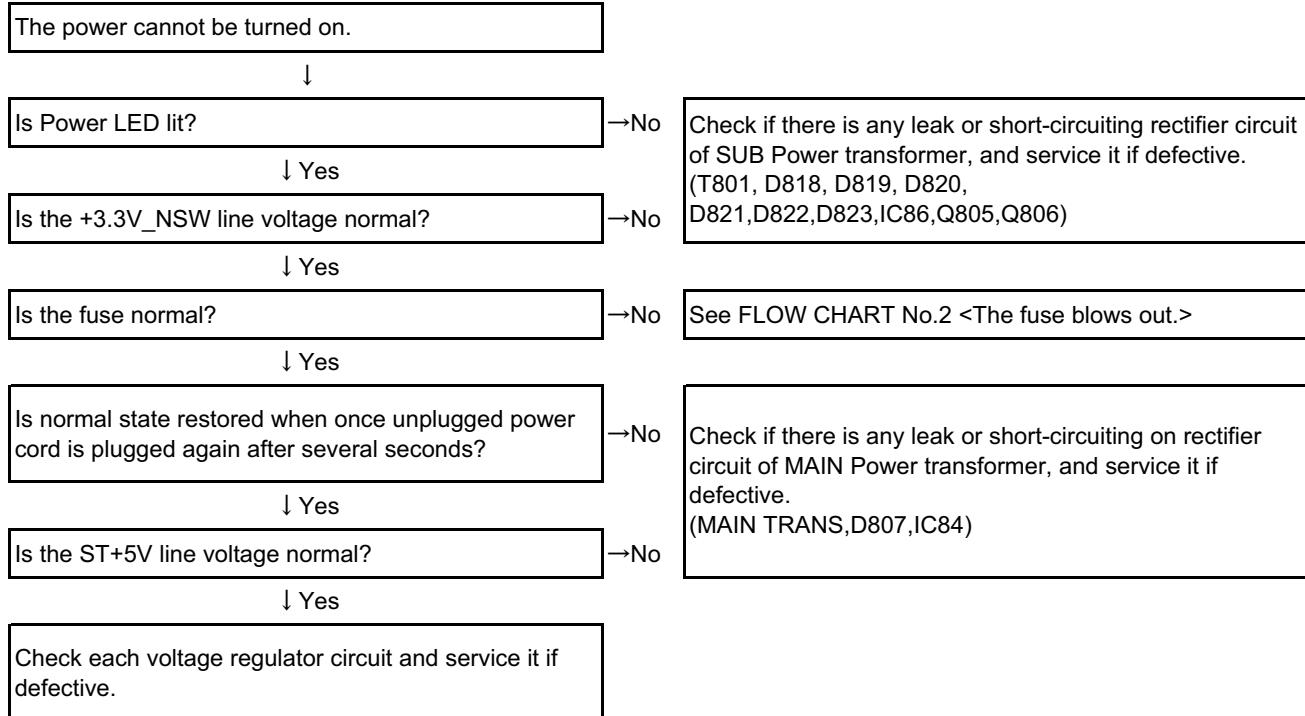


FLOW CHART NO.2

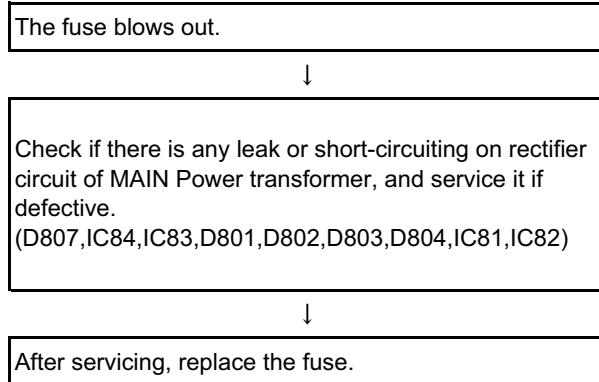


FLOW CHART NO.3

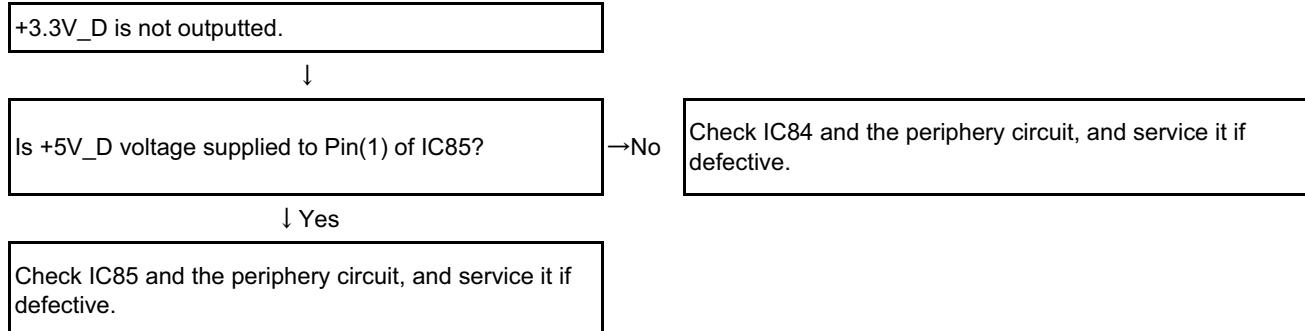


FLOW CHART NO.4

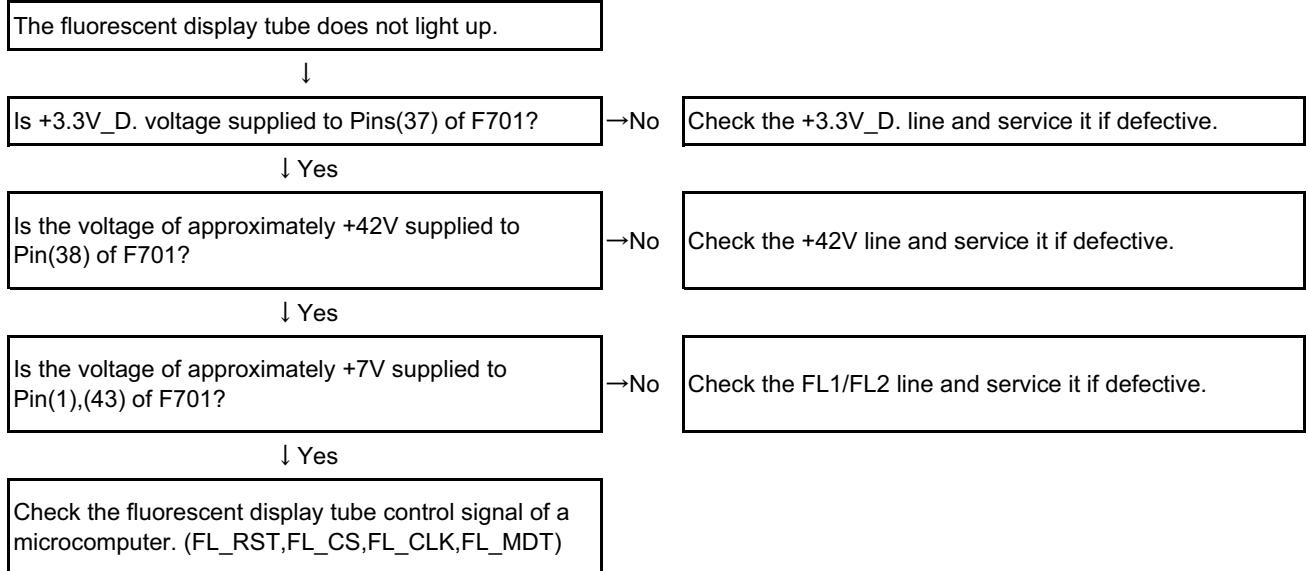

FLOW CHART NO.5

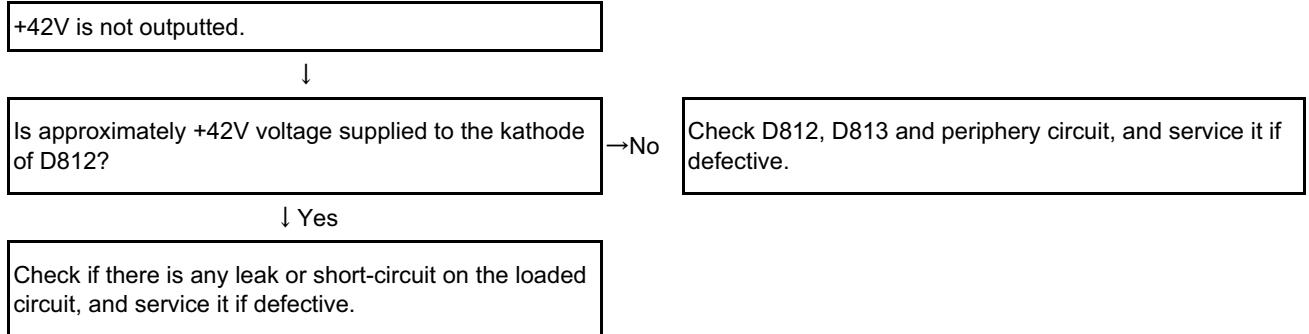

FLOW CHART NO.6

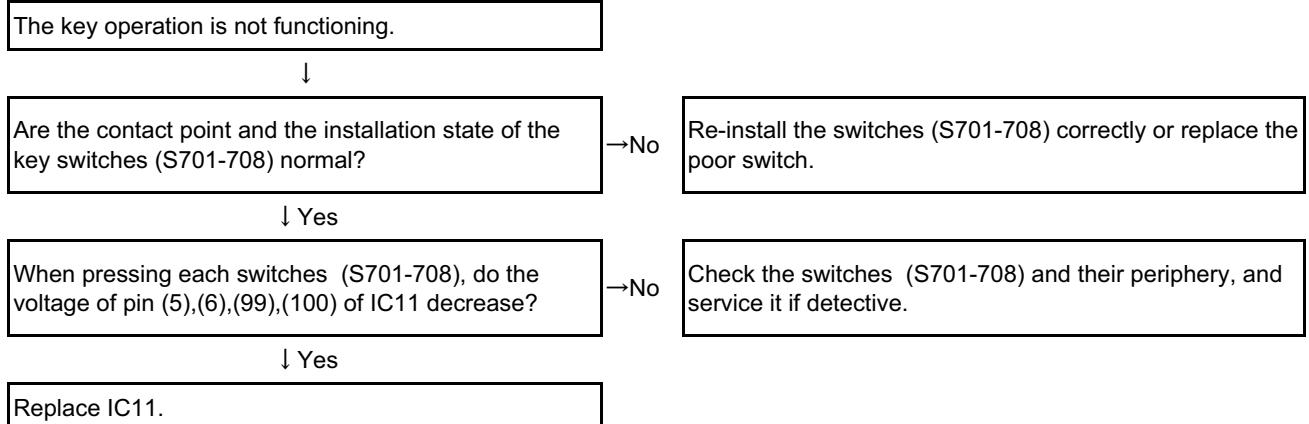

FLOW CHART NO.7

No operation is possible from the remote control unit.

↓

Is +3.3V_NSW voltage supplied to Pin(3) terminal of the infrared remote control receiver (IC71)?

→No

Check +3.3V_NSW line and service it if defective.

↓ Yes

Is the "L" pulse sent out Pin(1) terminal of receiver (IC71) when the infrared remote control is activated?

→No

Replace the infrared remote control receiver (IC71) or replace the remote control unit.

↓ Yes

Is the "L" pulse supplied to the Pin(4) of IC11?

→No

Check the line between Pin(1) terminal of receiver(IC71) and Pin(4) of IC11, and service it if defective.

↓ Yes

Replace IC11

FLOW CHART NO.8

The disc tray cannot be opened and closed. (It can be done using the remote control unit.)

↓

Is the normal control voltage inputted to Pin(6) of IC11? Refer to "FLOW CHART NO.6" <The key operation is not functioning.>

→No

Replace the "OP/CL" button (S707).

↓ Yes

Refer to "FLOW CHART NO.9" <The disc tray cannot be opened and closed.>


FLOW CHART NO.9

The disc tray cannot be opened and closed.

↓

Check the line between CN23 and IC14, and service it if defective.


FLOW CHART NO.10

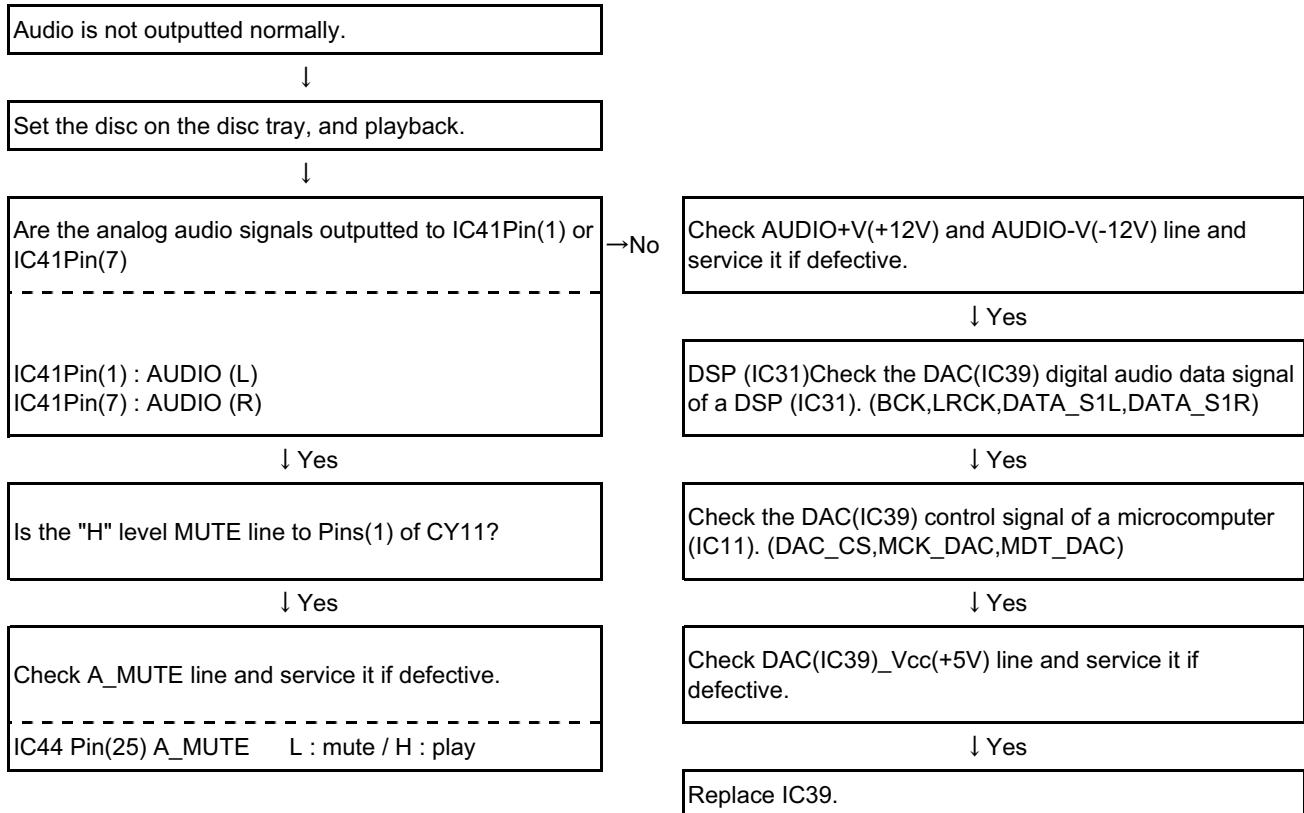


MEASURING POINT AND WAVEFORMS

MEASURING POINT

CUP12202 MAIN PCB ASSY (Component side)

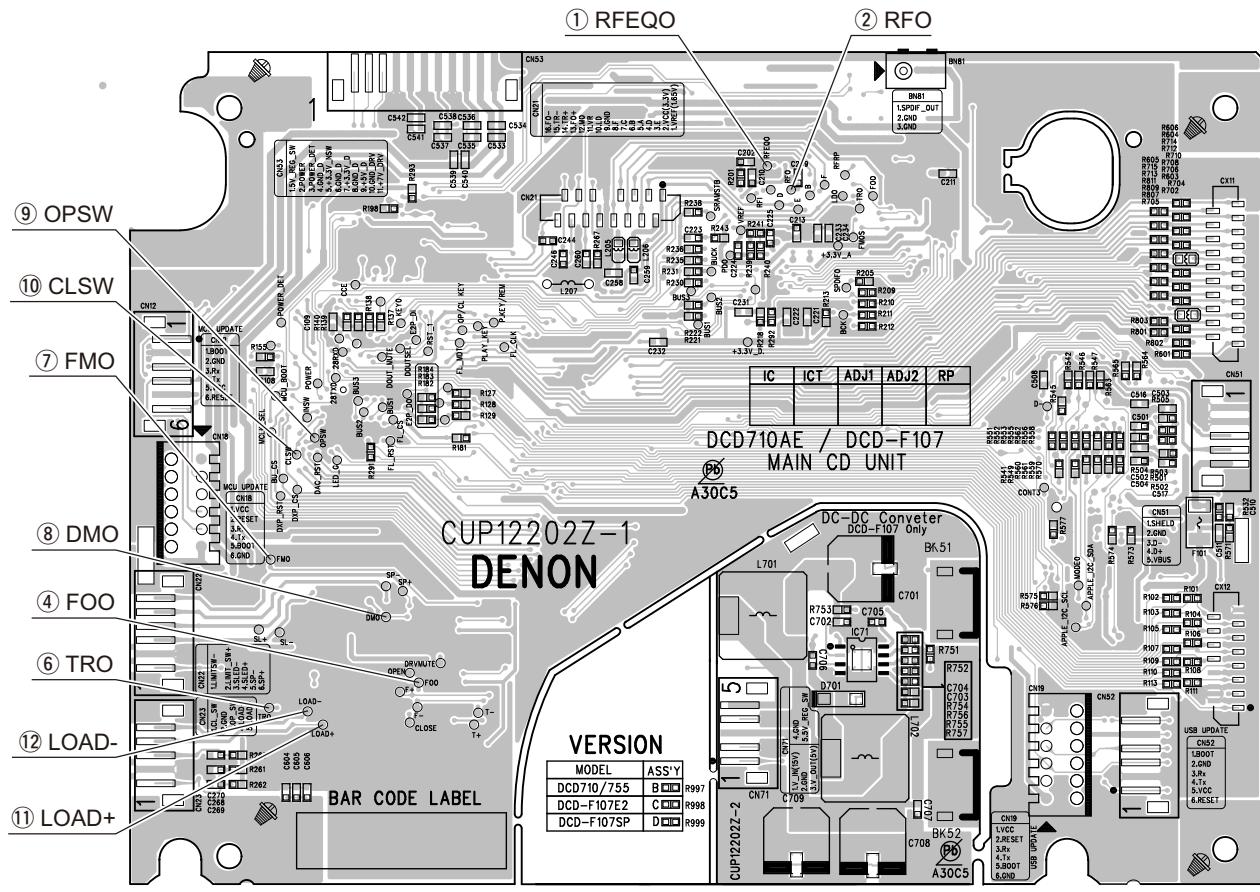


CUP12202 MAIN PCB ASSY (Foil side)

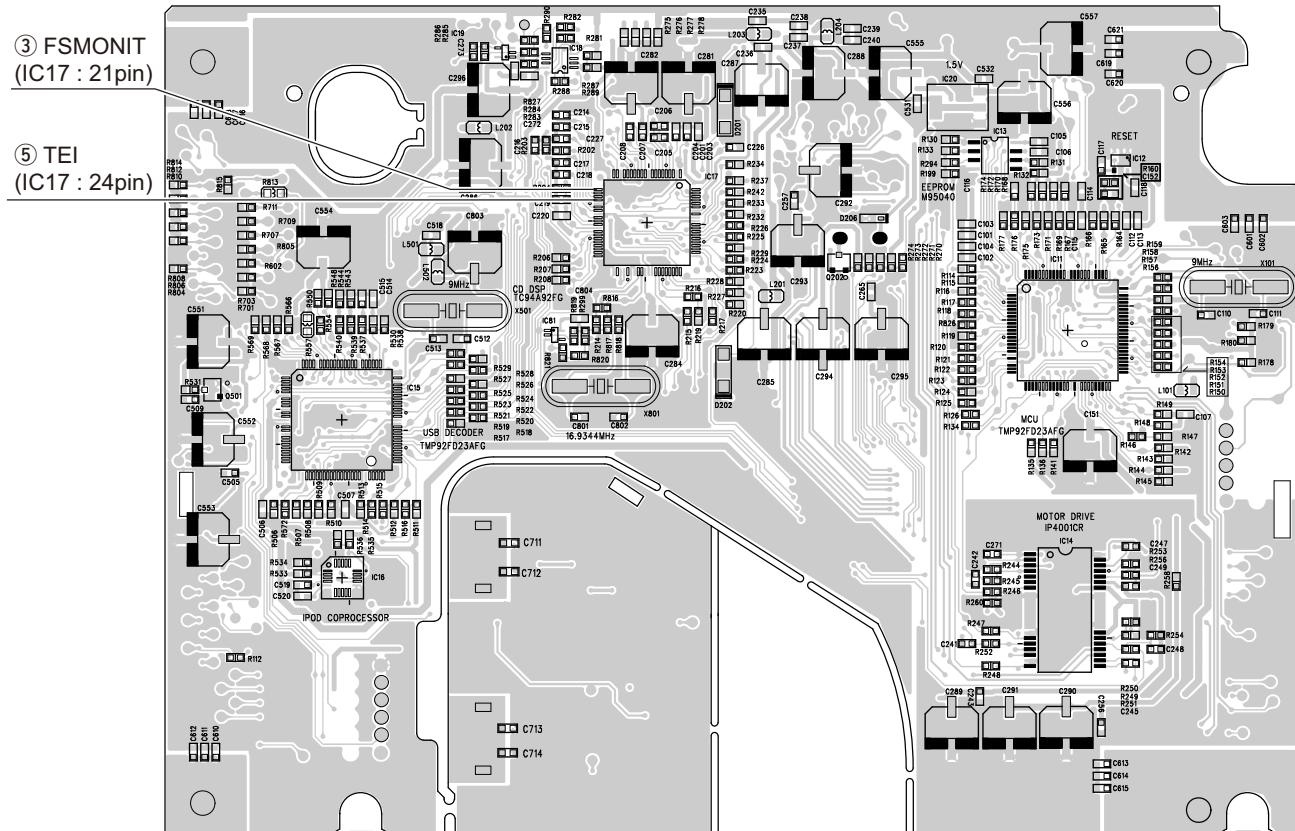


WAVEFORMS

1. DISC PLAY RF WAVEFORM (EYE-PATTERN)


1.1 CD (TCD-784) Play

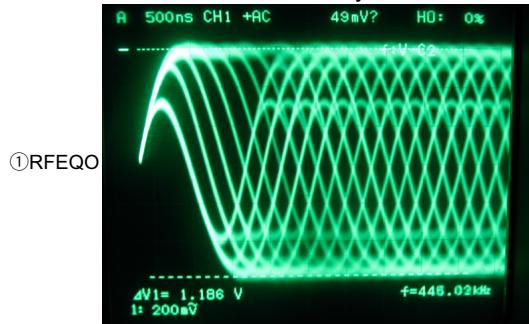

1.2 CD-R (TCD-R000RM) Play

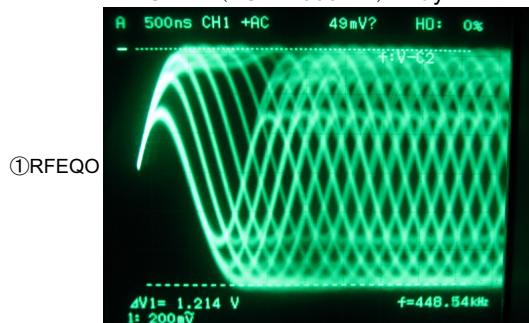


1.3 CD-RW (TCD-W000RM) Play

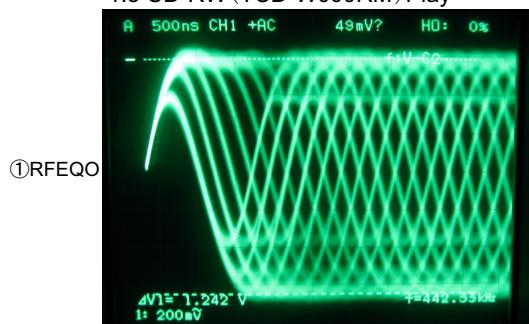


2. DISC DETECTION


2.1 CD (TCD-784) DISC DETECTION

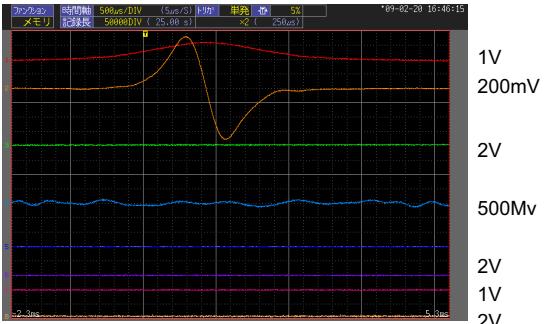

2.2 CD-R (TCD-R000RM) DISC DETECT

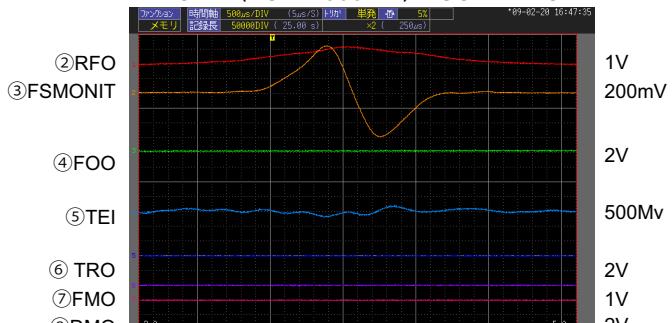


2.3 CD-RW (TCD-W000RM) DISC DETECTION

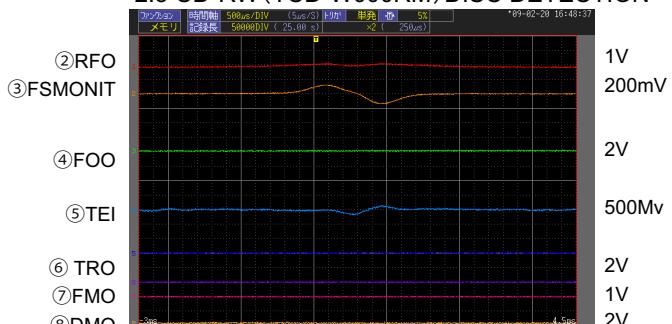


3. TOC READ


3.1 CD (TCD-784) TOC READ

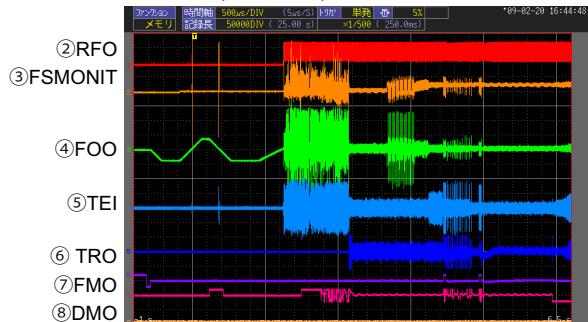

3.2 CD-R (TCD-R000RM) TOC READ

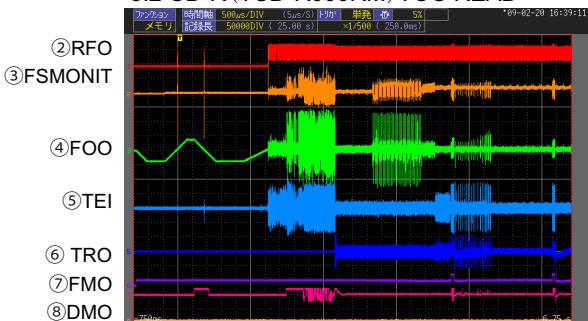


3.3 CD-RW (TCD-W000RM) TOC READ

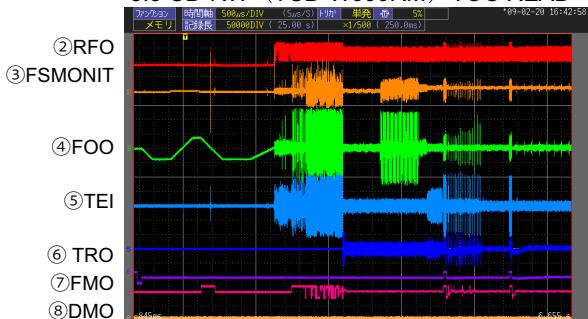


4. FOCUS ADJUSTMENT


4.1 CD (TCD-784) FOCUS ADJUSTMENT

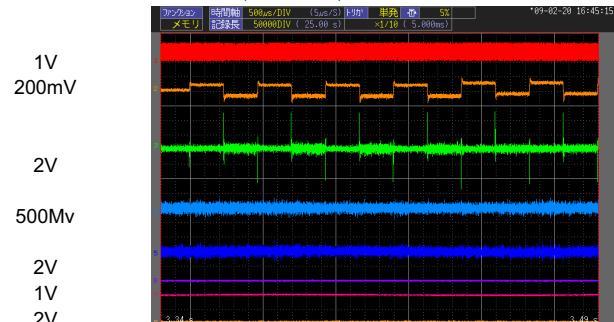


4.2 CD-R (TCD-R000RM) FOCUS ADJUSTMENT

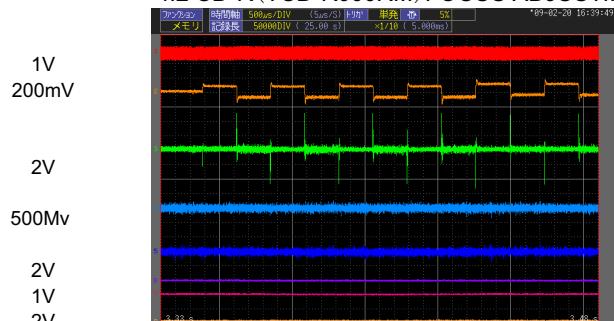

4.3 CD-R (TCD-R000RM) FOCUS ADJUSTMENT

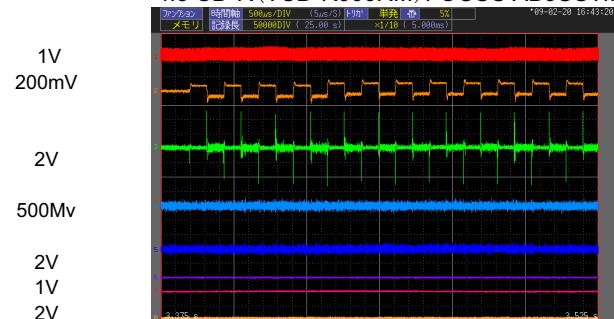

5. LOADER OPEN-CLOSE

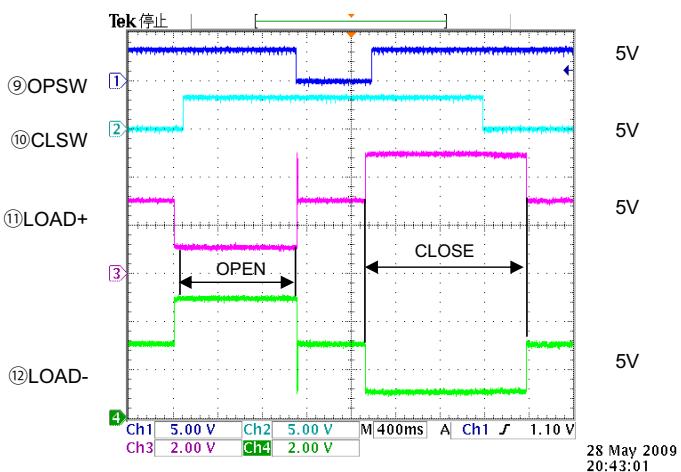


SEMICONDUCTORS

Only major semiconductors are shown, general semiconductors etc. are omitted to list.

The semiconductor which described a detailed drawing in a schematic diagram are omitted to list.

1. IC's

TMP92FD23AFG (IC11)

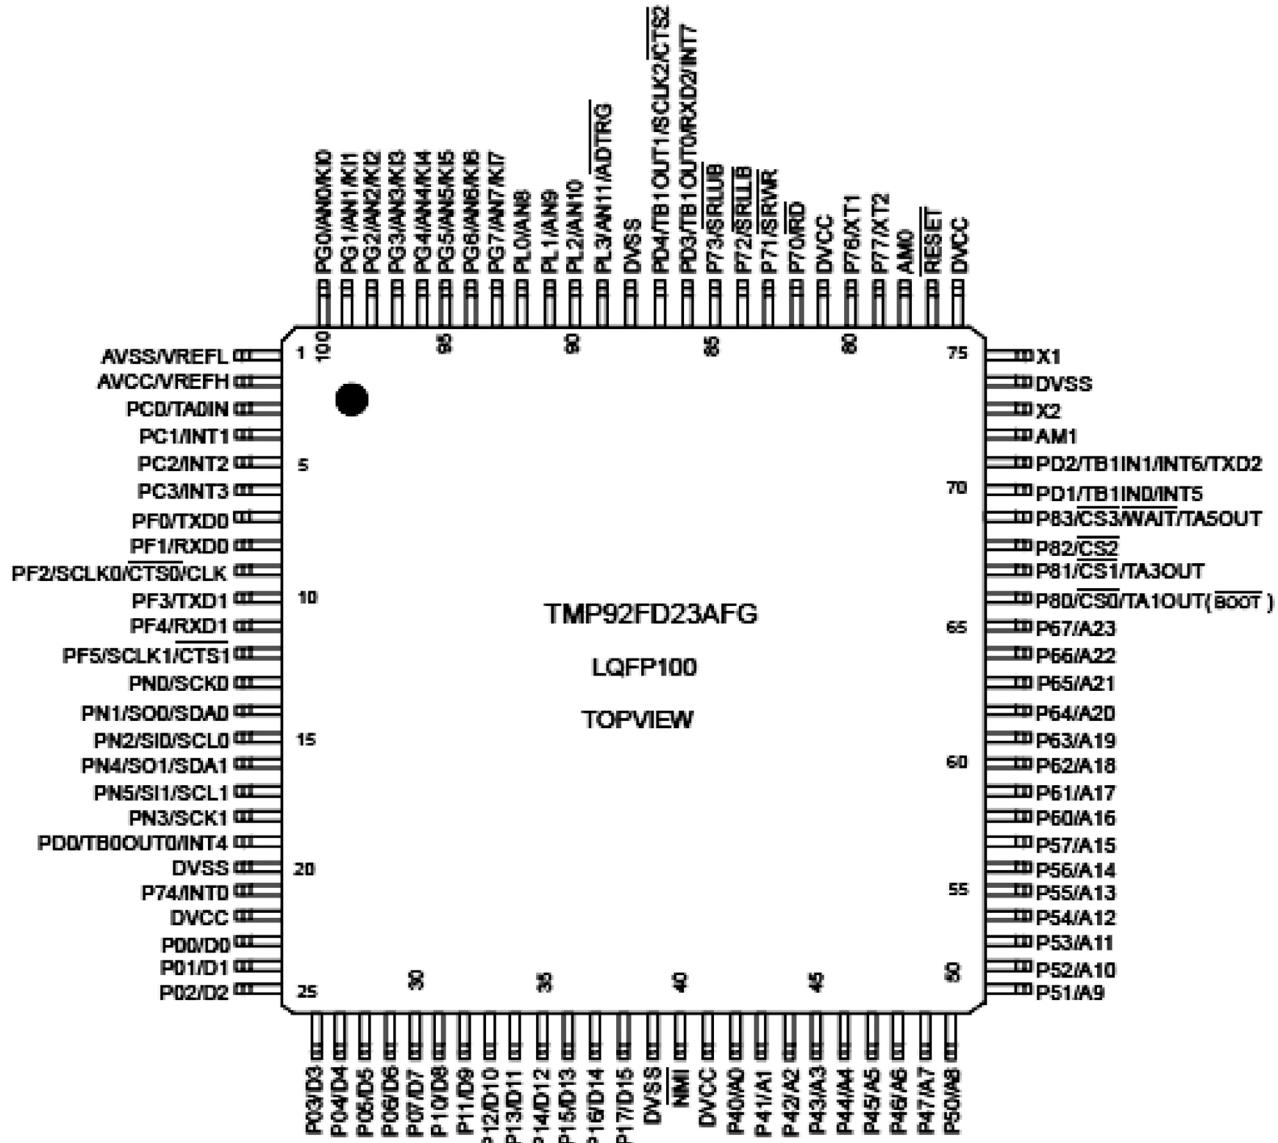


TMP92FD23AFG Terminal Function

Pin No	IC Terminal name	Terminal name	I/O setting	Terminal function	Remarks
1	AVSS/VREFL	Power supply(GND)	P	Power supply (GND)	
2	AVCC/VREFH	Power supply(+3.3V)	P	Power supply (+3.3V)	
3	PC0/TA0IN	Non(PU)	I	Non(PU)	Port only for input (Schmitt)
4	PC1/INT1	Non(PU)	I	POWER KEY (F107 only)	Port only for input (Schmitt)
5	PC2/INT2	PLAY KEY	I	PLAY KEY	Port only for input (Schmitt)
6	PC3/INT3	OP/CL KEY	I	OP/CL KEY	Port only for input (Schmitt)
7	PF0/TXD0	FL_MDT	O	FL tube communication line (data)	(Schmitt I input)
8	PF1/RXD0	OPEN	O	Non (NC)	(Schmitt I input)
9	PF2/SCLK0/CTS0/CLK	FL_CLK	O	FL tube communication line (clock)	(Schmitt I input)
10	PF3/TXD1/HSSO	[TXD]	O	DENON BUS [Communication lines for writing](F107 only)	(Schmitt I input)
11	PF4/RXD1/HSSI	[RXD]	I	DENON BUS [Communication lines for writing](F107 only)	(Schmitt I input)


Pin No	IC Terminal name	Terminal name	I/O setting	Terminal function	Remarks
12	PF5/SCLK1/CTS1/HSCLK	100KΩ/PD	I	DENON BUS(F107 only)	(Schmitt I input)
13	PN0/SCK0	CONT1	O	Reserved	(Schmitt I input), When resetting it, it becomes output latch 1.
14	PN1/SO0/SDA0	CONT2	I	Reserved	(Schmitt I input and open drain output), When resetting it, it becomes output latch 1.
15	PN2/SI0/SCL0	CONT3	O	Reserved	(Schmitt I input and open drain output), When resetting it, it becomes output latch 1.
16	PN4/SO1/SDA1	E2P_DI	O	Cereal data output for E2PROM	(Schmitt I input and open drain output), When resetting it, it becomes output latch 1.
17	PN5/SI1/SCL1	E2P_DO	I	Cereal data input for E2PROM	(Schmitt I input and open drain output), When resetting it, it becomes output latch 1.
18	PN3/SCK1	E2P_CLK	O	Serial clock output for E2PROM	(Schmitt I input) When resetting it, it becomes output latch 1.
19	PD0/TB0OUT0/INT4	PU	I	DENON BUS (F107 only)	(Schmitt I input)
20	DVSS	Power supply (GND)	P	Power supply (GND)	
21	P74/INT0	REMOCON	I	Remote control input (710only)	Port only for input (Schmitt)
22	DVCC	Power supply (+3.3V)	P	Power supply(+3.3V)	
23	P00/D0	OPEN_F	O	Tray OPEN control	P0x : Setting is possible by 1bit unit
24	P01/D1	CLSE_F	O	Tray CLOSE control	
25	P02/D2	A_Mute	O	DAC output audio mute	L; Mute, H; Mute cancel
26	P03/D3	DRVVMUTE	O	CD drive mute output	L; Mute, H; Mute cancel (Cancels above 3V)
27	P04/D4	INSW	I	CD drive limit SW input	
28	P05/D5	CLSW	I	CD drive close SW input	
29	P06/D6	OPSW	I	CD drive opening SW input	
30	P07/D7	(USB_DET) PU	I	Reserved	
31	P10/D8	FL_RST	O	FL tube communication line (reset)	P1x : Setting is possible by 1bit unit
32	P11/D9	FL_CS	O	FL tube communication line (chip selection)	
33	P12/D10	E2P_CS	O	Chip selection for E2PROM (Act:H)	
34	P13/D11	MODEL SEL	I	Model select H : 710AE / L : F107	
35	P14/D12	14BUS0 (DSP)	O	*TC94A92FG bus control	
36	P15/D13	14BUS1 (DSP)	O	*TC94A92FG bus control	
37	P16/D14	BUS2 (DSP)	O	*TC94A92FG bus control	
38	P17/D15	92BUS3 (DSP)	O	*TC94A92FG bus control	
39	DVSS	Power supply (GND)	P	Power supply (GND)	
40	NMI	PULL DOWN (0Ω)	I	NMI	BaseModel is PULL DOWN(0Ω).
41	DVCC	Power supply (+3.3V)	P	Power supply(+3.3V)	
42	P40/A0	MODE0	I	Select destination	P4x : Setting is possible by 1bit unit
43	P41/A1	MODE1	I	Select destination	00 : E2, 01 : E3, 10 : JP, 11 : E1C
44	P42/A2	LED_R	O	STB is red LED	H;ON L;OFF
45	P43/A3	LED_G	O	P.ON is green LED	H;ON L;OFF
46	P44/A4	DAC_CS	O	DAC1796 CS	
47	P45/A5	(DAC_MDO)	I	(DAC1796 MDO) No control	
48	P46/A6	DAC_RST	O	DAC1796 RST	710; PD in 1M
49	P47/A7	MDT_DAC/DXP/BU	O	DAC1796 MDI	
50	P50/A8	MCK_DAC/DXP/BU	O	DAC1796 MCK	P5x : Setting is possible by 1bit unit
51	P51/A9	DXP_CS	O	Chip selector for DXP6000	
52	P52/A10	DXP_RST	O	Reset for DXP6000	
53	P53/A11	BU_CS	O	Chip selector for BU2630	
54	P54/A12	MCK_SEL	O	MCLK selector	
55	P55/A13	POWER	O	MainTRANS on / off	
56	P56/A14	USBRST(DSP)	O	Reset for TMP92FD28FG	
57	P57/A15	DECRST	O	Reset for TC94A92FG	RESET in OR of D305 and D306 → RESET in +3.3V_D
58	P60/A16	OPEN	O	Non	P6x : Setting is possible by 1bit unit

Pin No	IC Terminal name	Terminal name	I/O setting	Terminal function	Remarks
59	P61/A17	(SRAMSTB)	I	Reserved	
60	P62/A18	PWR_DET	I	"AC power OFF detection input (When it is unplugged AC : L)"	
61	P63/A19	DOUT_MUTE	O	Mute output of digital data	
62	P64/A20	DOUT_SEL	O	Digital data output selection	
63	P65/A21	92SBSY	I	OASIS system busy input	Connection with Borelo (4) pin.
64	P66/A22	28INT0	O	Reserved	
65	P67/A23	BOOT_CONT	I	Reserved	
66	P80/CS0/ TA1OUT[BOOT]	BOOT	O	BOOT (for farm writing)	Only the output port
67	P81/CS1/TA3OUT	OPEN	O	Non	Only the output port
68	P82/CS2	5V_REG_SW	O	Reserved	Only the output port
69	P83/CS3/WAIT/ TA5OUT	92BUCK(DSP)	O	*TC94A92FG bus control	Schmitt input
70	PD1/TB1IN0/INT5	92DREQ(MP3)	I	OASIS DREQ input	(Schmitt I input) only for input
71	PD2/TB1IN1/INT6/ TXD2	28TXD	O	For TMP92FD28FG communication	(Schmitt I input)
72	AM1	PULL UP(0Ω)	I	AM1 Pull UP	Fixed H
73	X2	Oscillator connection pin	O	Oscillator connection pin	
74	DVSS	Power supply (GND)	P	Power supply (GND)	
75	X1	Oscillator connection pin	I	Oscillator connection pin	
76	DVCC	Power supply (+3.3V)	P	Power supply (+3.3V)	
77	RESET	RESET	I	Reset input of μ-com	
78	AM0	PULL UP(0Ω)	I	AM0 Pull UP	Fixed H
79	P77/XT2	PULL UP(47kΩ)	O	Non	Open drain output
80	P76/XT1	92CCE(DSP)	O	*TC94A92FG bus control	Open drain output R644(OPEN);GND
81	DVCC	Power supply (+3.3V)	P	Power supply (+3.3V)	
82	P70/RD	CHECKIN(100KΩ/ PD)	I	P.W.B. check mode	Schmitt input and with PU resistance
83	P71/SRWR	CHECK1(100KΩ/ PD)	I	P.W.B. check mode	Schmitt input and with PU resistance
84	P72/SRLLB	CHECK2(100KΩ/ PD)	I	P.W.B. check mode	Schmitt input and with PU resistance
85	P73/SRLUB	CHECK3(100KΩ/ PD)	I	P.W.B. check mode	Schmitt input
86	PD3/TB1OUT0/RXD2/ INT7	28RXD	I	For TMP92FD28FG communication	(Schmitt I input)
87	PD4/TB1OUT1/SCLK2/ CTS2	OPEN	O	Non	(Schmitt I input)
88	DVSS	Power supply(GND)	P	Power supply(GND)	
89	PL3/AN11/ADTRG	100KΩPD	I	Non	Port only for input(Schmitt)
90	PL2/AN10	100KΩ/PD	I	Non	Port only for input(Schmitt)
91	PL1/AN9	100KΩ/PD	I	Non	Port only for input(Schmitt)
92	PL0/AN8	100KΩ/PD	I	Non	Port only for input(Schmitt)
93	PG7/AN7/KI7	100KΩ/PD	I	Non	Port only for input(Schmitt)/Key on W.UP
94	PG6/AN6/KI6	100KΩ/PD	I	Non	Port only for input(Schmitt)/Key on W.UP
95	PG5/AN5/KI5	100KΩ/PD	I	Non	Port only for input(Schmitt)/Key on W.UP
96	PG4/AN4/KI4	100KΩ/PD	I	Non	Port only for input(Schmitt)/Key on W.UP
97	PG3/AN3/KI3	100KΩ/PD	I	Non	Port only for input(Schmitt)/Key on W.UP
98	PG2/AN2/KI2	LD_CHCK	I	Input for LD check	Port only for input(Schmitt)/Key on W.UP
99	PG1/AN1/KI1	KEY1	I	KEY input 1	Port only for input(Schmitt)/Key on W.UP
100	PG0/AN0/KI0	KEY0	I	KEY input 10	Port only for input(Schmitt)/Key on W.UP

TMP92CD28AFG (IC15)

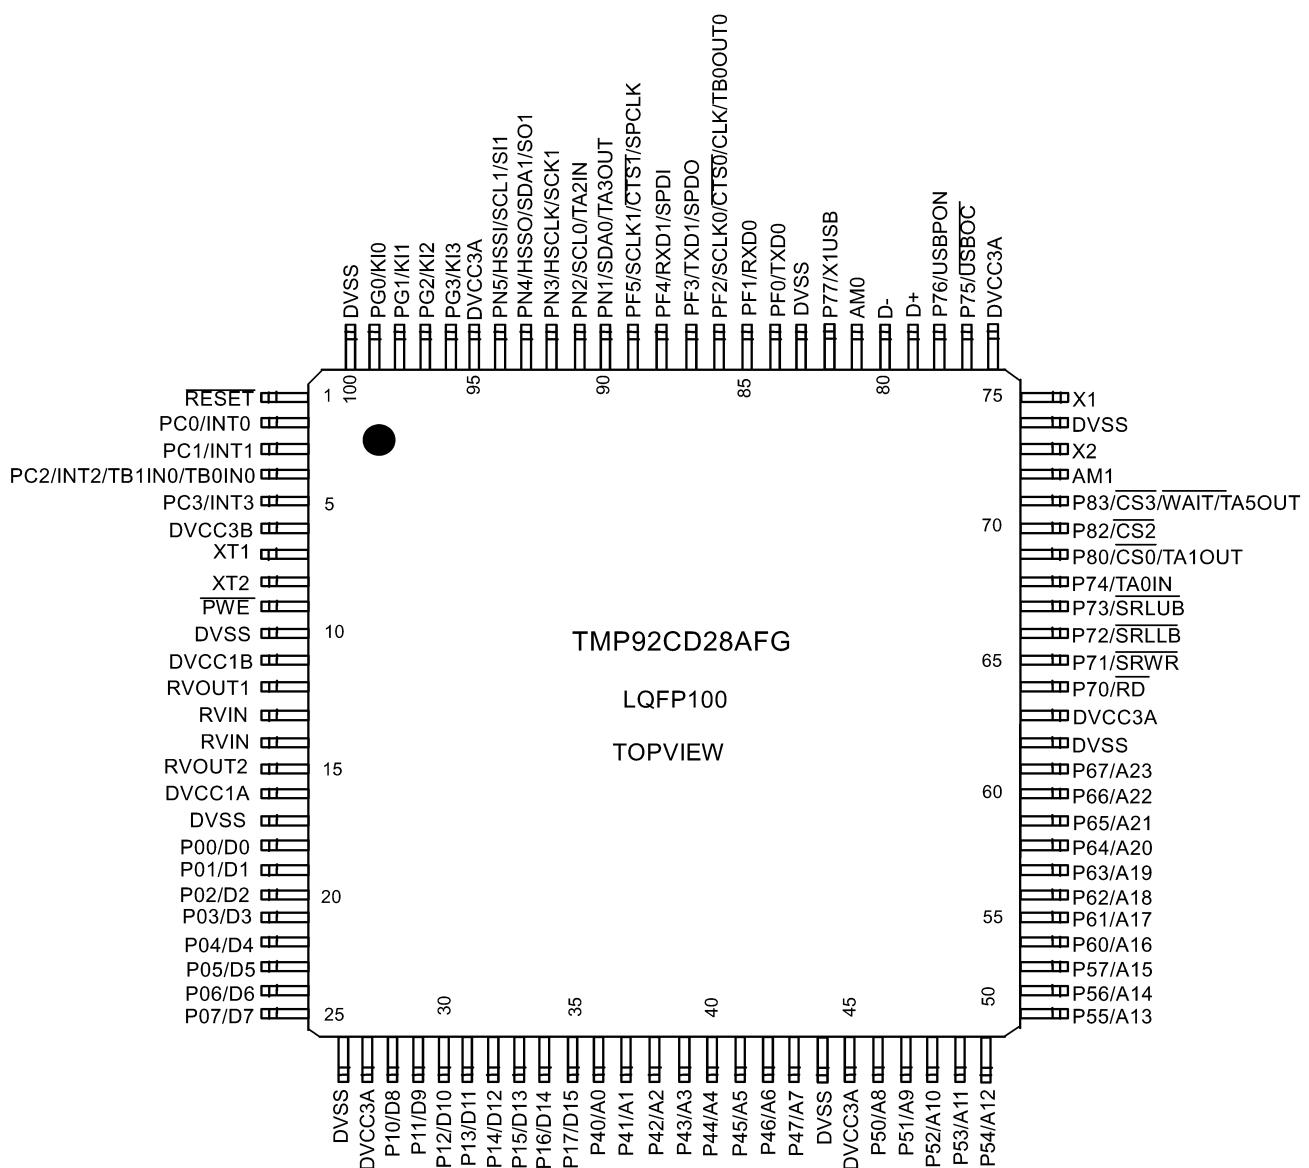

TMP92CD28AFG Block Diagram

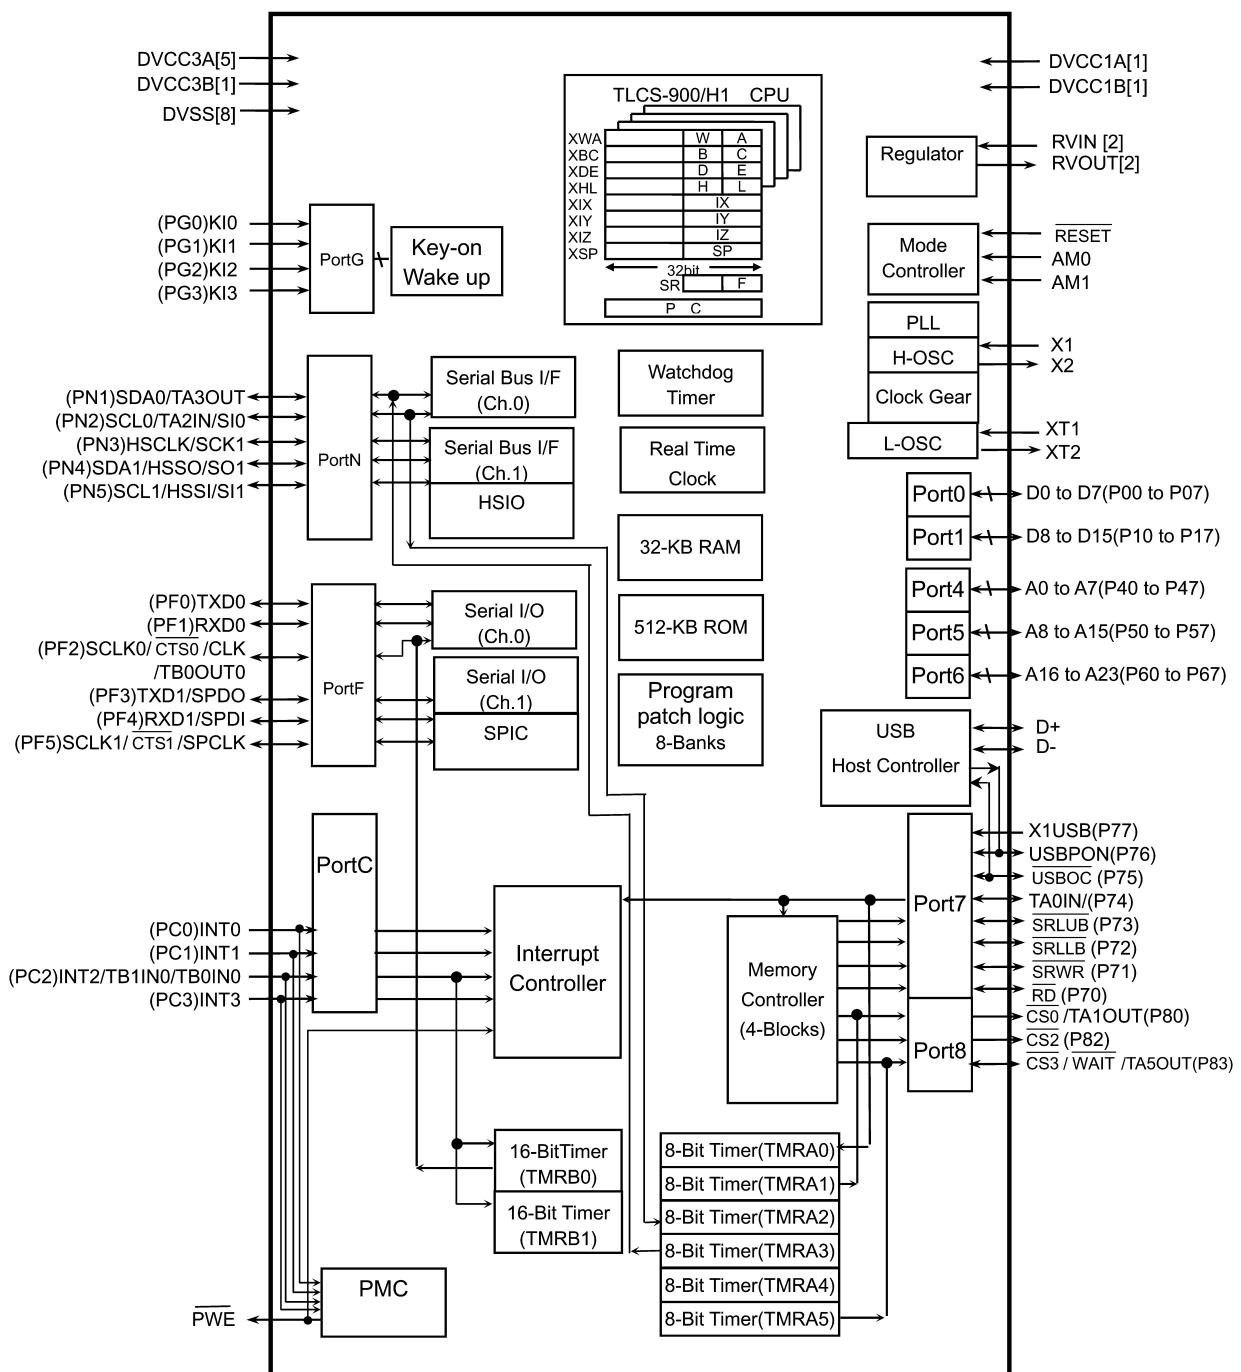


TMP92CD28AFG Terminal Function

Pin No	IC Terminal name	DCD-710AE/755SE Terminal name	I/O	RST	INIT	STB	Pull U/D	Port function
1	/RESET	RESETTerminal	I	I	I	-	PU	Port only for input (Schmitt input and PU resistance)
2	PC0/INT0	Reserved	I	-	I	-	PD	Port only for input (with Schmidt input)
3	PC1/INT1	Non (PD)	I	-	I	-	PD	Port only for input (with Schmidt input)
4	PC2/INT2/TB1IN0/ TB0IN0	SYSTEM BUSY input	I	-	I	-		Port only for input (with Schmidt input)
5	PC3/INT3	STREQ input	I	-	I	-		Port only for input (with Schmidt input)
6	DVCC3B	Power supply (+3.3V)	P	P	P	P	-	Power supply (+3.3V)
7	XT1	Non (NC)	I	I	I	-	-	Input port
8	XT2	Non (NC)	O	O	I	-	-	Output port

Pin No	IC Terminal name	DCD-710AE/755SE Terminal name	I/O	RST	INIT	STB	Pull U/D	Port function
9	PWE	Non (NC)	O	-	O	-	-	Output port
10	DVSS	Power supply (GND)	P	P	P	P	-	Power supply (GND)
11	DVCC1B	Power supply (+1.5V)	P	P	P	P	-	Power supply (+1.5V)
12	RVOUT1	Built-in +1.5V Regulator output	O	-	O	-	-	Voltage output is not in the Flash version
13	RVIN	Built-in +1.5V Regulator input	I	-	I	-	-	Flash version is a terminal Power supply
14	RVIN	Built-in +1.5V Regulator input	I	-	I	-	-	Flash version is a terminal Power supply
15	RVOUT2	Built-in +1.5V Regulator output	O	-	O	-	-	Voltage output is not in the Flash version
16	DVCC1A	Power supply (+1.5V)	P	P	P	P	-	Power supply(+1.5V)
17	DVSS	Power supply (GND)	P	P	P	P	-	Power supply(GND)
18	P00/D0	Non (NC)	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
19	P01/D1	Non (NC)	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
20	P02/D2	Non (NC)	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
21	P03/D3	Non (NC)	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
22	P04/D4	Non (NC)	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
23	P05/D5	Non (NC)	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
24	P06/D6	Non (NC)	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
25	P07/D7	Non (NC)	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
26	DVSS	Power supply (GND)	P	P	P	P	-	Power supply (GND)
27	DVCC3A	Power supply (+3.3V)	P	P	P	P	-	Power supply (+3.3V)
28	P10/D8	Non (NC)	O	-	O(L)	-	PD	P1x : Setting is possible by 1bit unit
29	P11/D9	Non (NC)	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
30	P12/D10	Non (NC)	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
31	P13/D11	MODEL ID L ; F107 H ;7 10AE	I	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
32	P14/D12	CHECK IN 100k PD	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
33	P15/D13	CHECK 1 100k PD	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
34	P16/D14	CHECK 2 100k PD	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
35	P17/D15	CHECK 3 100k PD	O	-	O(L)	-	-	P0x : Setting is possible by 1bit unit
36	P40/A0	Non (NC)	O	-	O(L)	-	-	P4x : Setting is possible by 1bit unit
37	P41/A1	Non (NC)	O	-	O(L)	-	-	P4x : Setting is possible by 1bit unit
38	P42/A2	Non (NC)	O	-	O(L)	-	-	P4x : Setting is possible by 1bit unit
39	P43/A3	Non (NC)	O	-	O(L)	-	-	P4x : Setting is possible by 1bit unit
40	P44/A4	Non (NC)	O	-	O(L)	-	-	P4x : Setting is possible by 1bit unit
41	P45/A5	Non (NC)	O	-	O(L)	-	-	P4x : Setting is possible by 1bit unit
42	P46/A6	Non (NC)	O	-	O(L)	-	-	P4x : Setting is possible by 1bit unit
43	P47/A7	Non (NC)	O	-	O(L)	-	-	P4x : Setting is possible by 1bit unit
44	DVSS	Power supply (GND)	P	P	P	P	-	Power supply (GND)
45	DVCC3A	Power supply (+3.3V)	P	P	P	P	-	Power supply (+3.3V)
46	P50/A8	Non (NC)	O	-	O(L)	-	-	P5x : Setting is possible by 1bit unit
47	P51/A9	Non (NC)	O	-	O(L)	-	-	P5x : Setting is possible by 1bit unit
48	P52/A10	Non (NC)	O	-	O(L)	-	-	P5x : Setting is possible by 1bit unit
49	P53/A11	Non (NC)	O	-	O(L)	-	-	P5x : Setting is possible by 1bit unit
50	P54/A12	Non (NC)	O	-	O(L)	-	-	P5x : Setting is possible by 1bit unit
51	P55/A13	Reserved	I	-	I	-	PU	P5x : Setting is possible by 1bit unit
52	P56/A14	Reserved	O	-	O(L)	-	PU	P5x : Setting is possible by 1bit unit
53	P57/A15	Reserved	I	-	I	-	PU	P5x : Setting is possible by 1bit unit
54	P60/A16	Non (NC)	O	-	O(L)	-	-	P6x : Setting is possible by 1bit unit
55	P61/A17	Non (PD)	O	-	O(L)	-	PD	P6x : Setting is possible by 1bit unit
56	P62/A18	CCE	O	-	I	-	PU	P6x : Setting is possible by 1bit unit
57	P63/A19	BUCK	O	-	I	-	PU	P6x : Setting is possible by 1bit unit
58	P64/A20	BUS0	I/O	-	I	-	PU	P6x : Setting is possible by 1bit unit
59	P65/A21	BUS1	I/O	-	I	-	PU	P6x : Setting is possible by 1bit unit
60	P66/A22	BUS2	I/O	-	I	-	PU	P6x : Setting is possible by 1bit unit
61	P67/A23	BUS3	I/O	-	I	-	PU	P6x : Setting is possible by 1bit unit
62	DVSS	Power supply (GND)	P	P	P	P	-	Power supply (GND)
63	DVCC3A	Power supply (+3.3V)	P	P	P	P	-	Power supply (+3.3V)
64	P70/RD	Non (NC)	O	-	O(L)	-	-	Port only for input (Schmitt input and PU resistance)
65	P71/SRWR	Non (NC)	O	-	O(L)	-	-	Port only for input (Schmitt input and PU resistance)
66	P72/SRLLB	Non (PD)	O	-	O(L)	-	PD	Port only for input (Schmitt input and PU resistance)

Pin No	IC Terminal name	DCD-710AE/755SE Terminal name	I/O	RST	INIT	STB	Pull U/D	Port function
67	P73/SRLUB	Non (NC)	O	-	O(L)	-	-	Port only for input (Schmitt input and PU resistance)
68	P74/TA0IN	RESET output for TC94A92FG	O	-	O(H)	-	-	I/O port (Schmitt input)
69	P80/CS0/TA1OUT/BOOT	Flash writing BOOT	O	I	O(H)	-	PU	Port only for input
70	P82/CS2	Reserved	O	-	O(H)	-	-	Port only for input
71	P83/CS3/WAIT/TA5OUT	TC94A92FG communication LRCK	O	-	O(H)	-	-	I/O port
72	AM1	Operational mode (PU)	I	-	I	-	PU	Port only for input (Fixed H)
73	X2	Oscillator connection terminal (9.000MHz)	O	-	O	-	-	Output port
74	DVSS	Power supply (GND)	P	P	P	P	-	Power supply (GND)
75	X1	Oscillator connection terminal (9.000MHz)	I	-	I	-	-	Input port
76	DVCC3A	Power supply (+3.3V)	P	P	P	P	-	Power supply (+3.3V)
77	P75/USBOC	USB OC (overcurrent detection Act L) input	I	-	I	-	-	I/O port (Schmitt input)
78	P76/USBPON	Non (NC)	O	-	O(H)	-	-	I/O port (Schmitt input)
79	D+	USB connection terminal	I/O	-	I/O	-	-	I/O port
80	D-	USB connection terminal	I/O	-	I/O	-	-	I/O port
81	AM0	Operation mode (PU)	I	-	I	-	PU	Port only for input (Fixed H)
82	P77/X1USB	Non (PD)	O	-	O(H)	-	-	I/O port (Schmitt input)
83	DVSS	Power supply (GND)	P	P	P	P	-	Power supply (GND)
84	PF0/TXD0	Reserved	I	-	I	-	PD	I/O port (Schmitt input)
85	PF1/RXD0	Reserved	I	-	I	-	PD	I/O port Schmitt input)
86	PF2/SCLK0/CTS0/CLK/TB0OUT0	Non (PD)	I	-	I	-	PD	I/O port (Schmitt input)
87	PF3/TXD1/SPDO	SYS μ-com communication line TXD/Flash writing TXD	O	-	O	-	PU	I/O port (Schmitt input)
88	PF4/RXD1/SPDI	SYS μ-com communication line TXD/Flash writing TXD	I	-	I	-	PU	I/O port
89	PF5/SCLK1/CTS1/SPCLK	Co-PRO RESET	O	-	O	-	PU	I/O port
90	PN1/SDA0/TA3OUT	Co-PRO communication line I2C_SDA	I/O	-	I/O	-	PU	I/O port (Schmitt input, open drain)
91	PN2/SCL0/TA2IN	Co-PRO communication line I2C_SCL	O	-	O	-	PU	I/O port (Schmitt input, open drain)
92	PN3/HCLK/SCK1	TC94A92FG communication BCK	O	-	O	-	-	I/O port (Schmitt input)
93	PN4/HSSO/SDA1/SO1	TC94A92FG communication DATA	O	-	O	-	-	I/O port Schmitt input, open drain)
94	PN5/HSSI/SCL1/SI1	TC94A92FG communication GATE	O	-	O	-	-	I/O port (Schmitt input, open drain)
95	DVCC3A	Power supply (+3.3V)	P	P	P	P	-	Power supply (+3.3V)
96	PG3/KI3	Non (PD)	I	-	I	-	PD	Port only for input (Schmitt)/Key on W.UP
97	PG2/KI2	Non (PD)	I	-	I	-	PD	Port only for input (Schmitt)/Key on W.UP
98	PG1/KI1	Non (PD)	I	-	I	-	PD	Port only for input (Schmitt)/Key on W.UP
99	PG0/KI0	TC94A92FG DREQ input	I	-	I	-	PD	Port only for input (Schmitt)/Key on W.UP
100	DVSS	Power supply (GND)	P	P	P	P	-	Power supply(GND)

TC94A92FG (IC17)

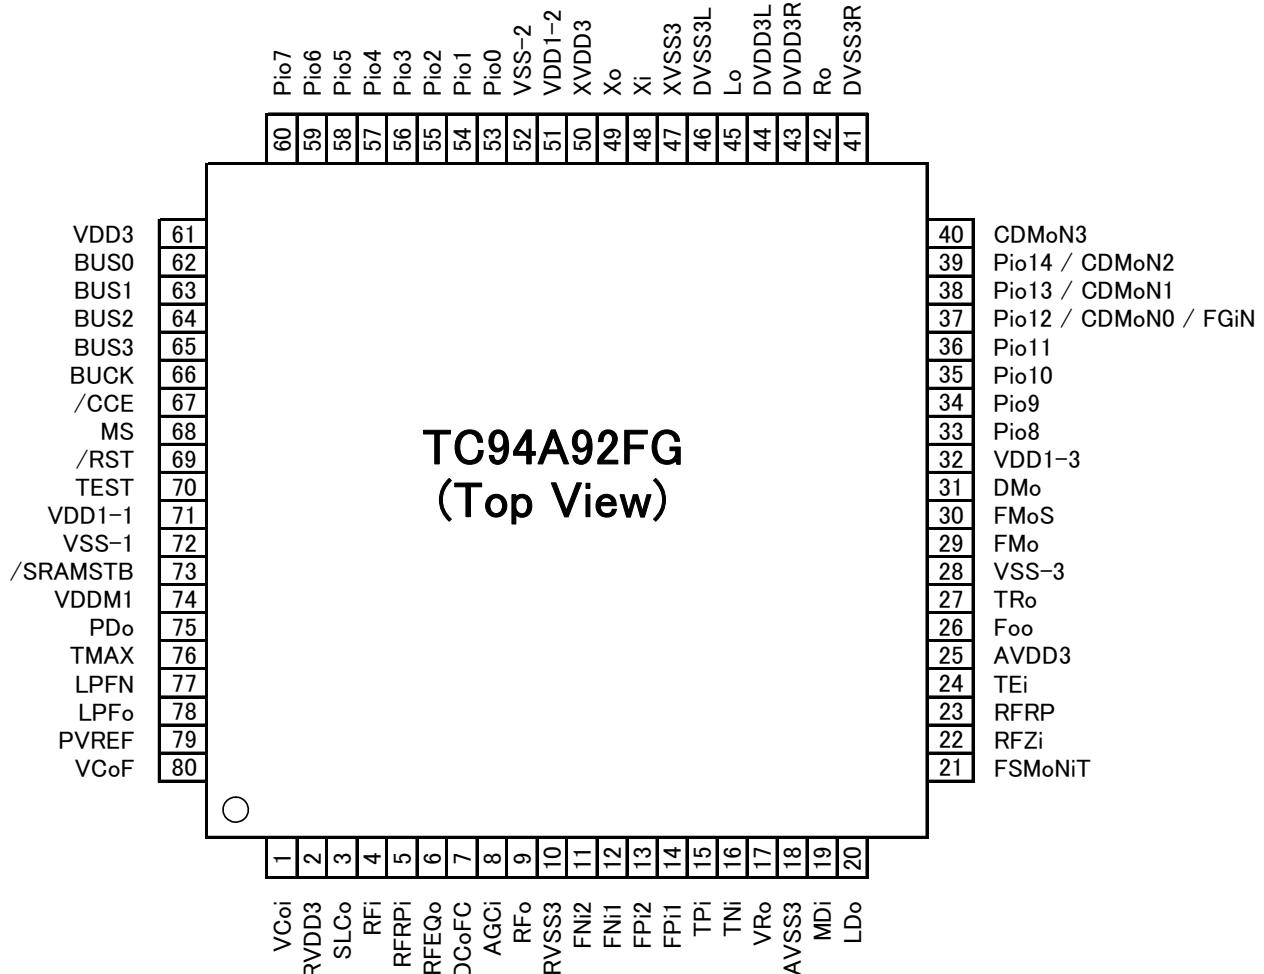

TC94A92FG Terminal Function

Pin No.	Symbol	I/O	Description	Default	Remarks
1	VCoI	O 3AI/F	DSP VCO - EFM and PLCK Phase difference signal output pin. (DSP VCO control voltage input pin.)	O	3 state output
2	RVDD3	-	CD-DSP-Power supply for 3.3V RF amplifier core and PLL circuit	-	
3	SLCo	O 3AI/F	EFM slice level output pin	O	Connect capacitor according with servo frequency band.
4	RFi	I 3AI/F	RF signal input pin	I	Selectable Zin 20/10 kΩ
5	RFRPi	I 3AI/F	RF ripple signal input pin	I	
6	RFEQo	O 3AI/F	RF equalizer circuit output pin.	O	Connect to RFRPi by 0.1uF, to RFi by 4700pF.
7	DCoFC	O 3AI/F	RFEQo offset compensation LPF output	O	Connect to Vro by more than 0.015uF
8	AGCi	I 3AI/F	RF signal AGC amplifier input pin	I	
9	RFo	O 3AI/F	RF signal generation amplifier output pin	O	
10	RVSS3	-	Grounding pin for 3.3 RF amplifier core and PLL circuit	-	
11	FNI2	I 3AI/F	Main beam signal input pin. To be connected to PIN diode C.	I	
12	FNI1	I 3AI/F	Main beam signal input pin. To be connected to PIN diode A.	I	
13	FPI2	I 3AI/F	Main beam signal input pin. To be connected to PIN diode D.	I	
14	FPI1	I 3AI/F	Main beam signal input pin. To be connected to PIN diode B.	I	
15	TPi	I 3AI/F	Sub beam signal input pin. To be connected to PIN diode F.	I	
16	TNi	I 3AI/F	Sub beam signal input pin. To be connected to PIN diode E.	I	
17	VRo	O 3AI/F	1.65 V reference voltage output pin.	O	Connected to PVREF, And connect to GNG by 0.1uF+100uF.
18	AVSS3	-	Grounding pin for 3.3V CD analog circuits.	-	
19	MDi	I 3AI/F	Monitor photodiode amplifier input pin.	I	Reference Voltage=178mVtyp.
20	LDo	O 3AI/F	Laser diode amplifier output pin	O	

Pin No.	Symbol	I/O	Description	Default	Remarks
21	FSMoNiT	O 3AI/F	Focus Error signal / Sub beam add signal output pin(monitor pin/GND)	O	
22	RFZi	I 3AI/F	RF ripple zero-cross signal Input pin	I	
23	RFRP	O 3AI/F	RF ripple signal output pin.	O	
24	TEi	O 3AI/F	Tracking error signal output pin.	O	Bulit-in serises R=500Ω. Connect to VRo by capacitor.
25	AVDD3	-	Power supply pin for 3.3 V CD analog circuits.	-	
26	FOo	O 3AI/F	Focus servo equalizer output pin.	O	Bulit-in serises R=3.3 kΩ
27	TRo	O 3AI/F	Tracking servo equalizer output pin.	O	Bulit-in output R=3.3 kΩ
28	VSS-3	-	Grounding pin for 1.5V Decoder-DSP CD circuit	-	
29	FMo	O 3AI/F	Feed servo equalizer output pin.	O	Bulit-in output R=3.3 kΩ
30	FMoS	O 3AI/F	Feed servo equalizer output pin. (Stepper motor application)	O	Bulit-in output R=3.3 kΩ
31	DMo	O 3AI/F	Disc servo equalizer output pin	O	Bulit-in output R=3.3 kΩ
32	VDD1-3	I/O 3I/F	Power supply pin for 1.5V Decoder-DSP /CD circuit	-	
33	Pio8	I/O 3I/F	Port 8(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
34	Pio9	I/O 3I/F	Port 9(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
35	Pio10	I/O 3I/F	Port 10(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
36	Pio11	I/O 3I/F	Port 11(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
37	Pio12/ CDMoN0/ FGIN	I/O 3I/F	Port 12(General Input/Output Port) / CD Monitor 0 / FG signal input	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
38	Pio13/ CDMoN1	I/O 3I/F	Port 13(General Input/Output Port) / CD Monitor1	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
39	Pio14/ CDMoN2	I/O 3I/F	Port 14(General Input/Output Port) / CD Monitor 2	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
40	CDMoN3	O 3I/F	CD Monitor3 (Default output : SBSY)	O	CMOS Port Refer to [1.2 Pin Assinment Table]

Pin No.	Symbol	I/O	Description	Default	Remarks
41	DVSS3R	-	Grounding pin for 3.3V Multi-Bit DAC circuit	-	
42	Ro	O 3AI/F	R channel audio output pin of Audio DAC.	O	
43	DVDD3R	-	Power supply pin for 3.3V Audio DAC circuit.	-	
44	DVDD3L	-	Power supply pin for 3.3V Audio DAC circuit.	-	
45	Lo	O 3AI/F	L channel audio output pin of Audio DAC	O	
46	DVSS3L	-	Grounding pin for 3.3V Multi-Bit DAC Circuit	-	
47	XVSS3	-	Grounding pin for 3.3V clock oscillator circuit	-	
48	Xi	I 3AI/F	System clock Input pin	I	Xtal oscillation circuit. Connect feedback resistor 1 MΩ between Xo and Xi
49	Xo	O 3AI/F	System clock Output pin	O	
50	XVDD3	-	Power Supply pin for 3.3V clock oscillator circuit	-	
51	VDD1-2	-	Power Supply pin for 1.5V Digital circuit	-	
52	VSS-2	-	Grounding pin for 1.5V digital circuit	-	
53	Pio0	I/O 3I/F	Port 0(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
54	Pio1	I/O 3I/F	Port 1(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
55	Pio2	I/O 3I/F	Port 2(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
56	Pio3	I/O 3I/F	Port 3(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
57	Pio4	I/O 3I/F	Port 4(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
58	Pio5	I/O 3I/F	Port 5(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
59	Pio6	I/O 3I/F	Port 6(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
60	Pio7	I/O 3I/F	Port 7(General Input/Output Port)	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]


Pin No.	Symbol	I/O	Description	Default	Remarks
61	VDD3	-	Power Supply pin for 3.3V Digital circuit	-	
62	BUS0	I/O 3I/F	Microprocessor I/F data input/output pin 0	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
63	BUS1	I/O 3I/F	Microprocessor I/F data input/output pin 1	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
64	BUS2	I/O 3I/F	Microprocessor I/F data input/output pin 2	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
65	BUS3	I/O 3I/F	Microprocessor I/F data input/output pin 3	I	CMOS Port Schmitt input Refer to [1.2 Pin Assinment Table]
66	BUCK	I 3I/F	Microprocessor I/F BUS clock Input pin	I	Schmitt input Refer to [1.2 Pin Assinment Table]
67	/CCE	I 3I/F	Microprocessor I/F chip enable input pin	I	Schmitt input Refer to [1.2 Pin Assinment Table]
68	MS	I 3I/F	Microprocessor I/F mode selection pin. "H": Parallel I/F, "L": Serial I/F	I	Refer to [1.2 Pin Assinment Table]
69	/RST	I 3I/F	Reset Input pin	I	Schmitt input
70	Test	I 3I/F	Test pin ("L" fixed)	I	Connect to GND for normal operation
71	VDD1-1	-	Power Supply pin for 1.5V Digital circuit	-	
72	VSS-1	-	Grounding pin for 1.5V Digital circuit	-	
73	/SRAMSTB	I 3I/F	1Mbit SRAM stand by pin (/SRAMSTB="L")	I	
74	VDDM1	-	Power Supply for 1.5V 1Mbit SRAM circuit	-	
75	PDo	O 3AI/F	EFM and PLCK Phase difference signal output pin.	O	4-state output (RVDD3, RVSS3,PVREF, Hiz)
76	TMAX	O 3AI/F	TMAX detection result output pin	O	3-state output (RVDD3, RVSS3, Hiz)
77	LPFN	I 3AI/F	PLL circuit LPF amplifier inversion input pin	I	
78	LPFo	O 3AI/F	PLL circuit LPF amplifier Output pin	O	
79	PVREF	-	PLL circuit 1.65 V reference voltage pin.	-	Connected to VRO. Connect to GND by 0.1uF and 100uF.
80	VCoF	O 3AI/F	VCO filter pin	O	Connect to GND by 0.01uF

3A I/F : 3 V analog circuit input/output pin.

1.5 I/F : 1.5Vdigital input/output pin.

3 I/F : 3 V digital input/output pin.


IP4001 (IC14)

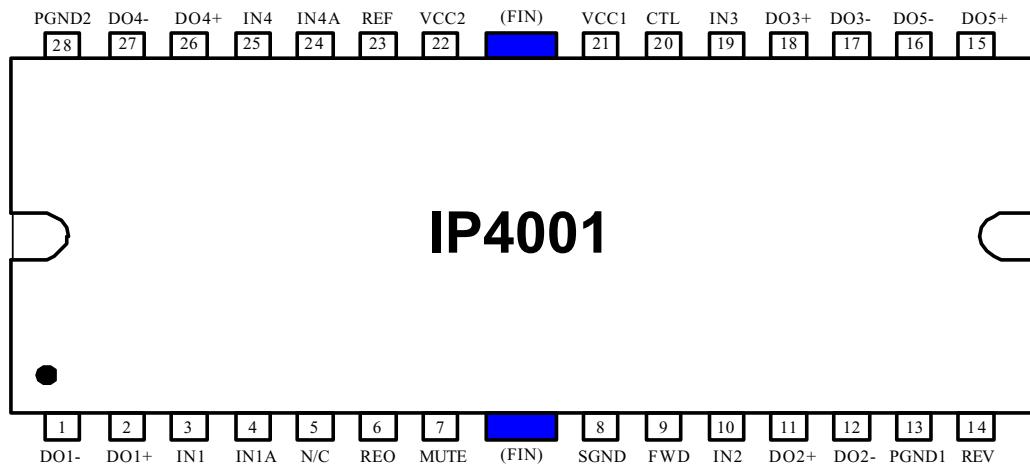


Pin Descriptions


NO	SYMBOL	I/O	DESCRIPTION	NO	SYMBOL	I/O	DESCRIPTION
1	DO1-	O	CH1 OUTPUT (-)	15	DO5+	O	CH5 OUTPUT (+)
2	DO1+	O	CH1 OUTPUT (+)	16	DO5-	O	CH5 OUTPUT (-)
3	IN1	I	CH1 INPUT 1	17	DO3-	O	CH3 OUTPUT (-)
4	IN1A	I	CH1 INPUT 2	18	DO3+	O	CH3 OUTPUT (+)
5	N / C	-	NO-CONNECTION	19	IN3	I	CH3 INPUT
6	REO	O	REGULATOR OUTPUT	20	CTL	I	CH5 MOTOR SPEED CONTROL
7	MUTE	I	MUTE INPUT	21	VCC1	I	SUPPLY VOLTAGE 1 (CH2,CH3,CH5)
8	SGND	-	SIGNAL GROUND	22	VCC2	I	SUPPLY VOLTAGE 2 (CH1,CH4,SIGNAL,REG)
9	FWD	I	CH5 INPUT 1	23	REF	I	CH BIAS INPUT
10	IN2	I	CH2 INPUT	24	IN4A	I	CH4 INPUT 1
11	DO2+	O	CH2 OUTPUT (+)	25	IN4	I	CH4 INPUT 2
12	DO2-	O	CH2 OUTPUT (-)	26	DO4+	O	CH4 OUTPUT (+)
13	PGND1	-	POWER GROUND 1	27	DO4-	O	CH4 OUTPUT (-)
14	REV	I	CH5 INPUT 2	28	PGND2	-	POWER GROUND 2

Block Diagram

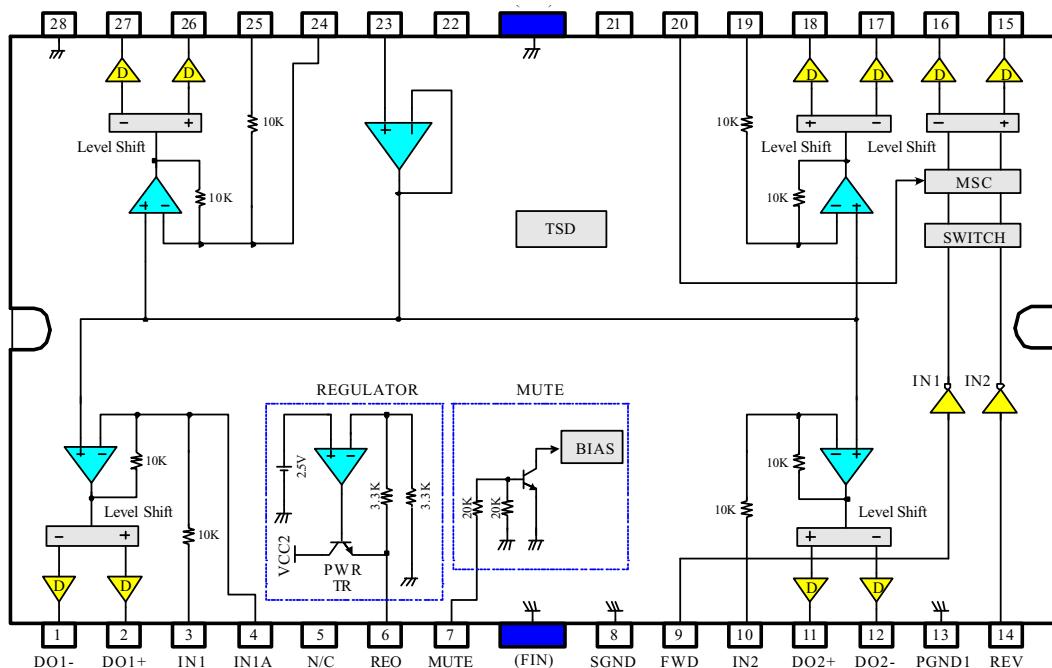

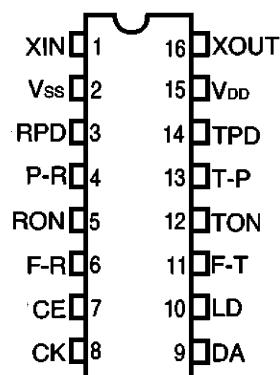


Block Diagram

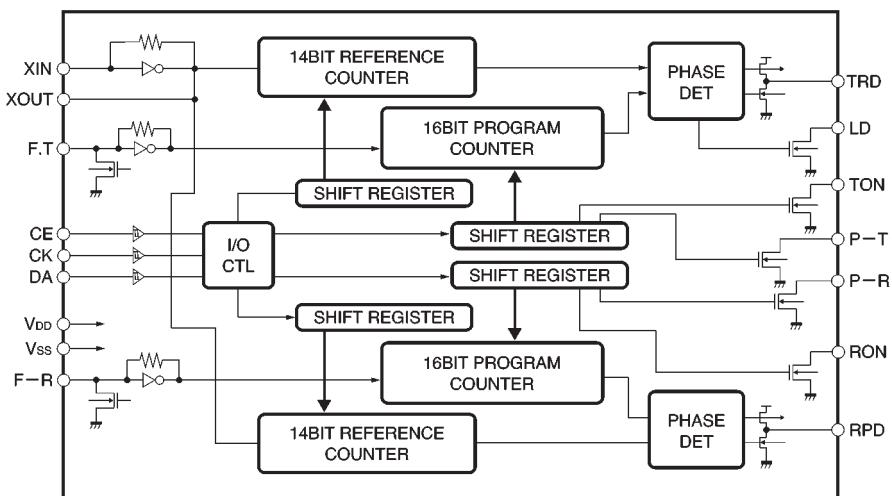**Pin Descriptions**

Pin No.	Pin name	Name	Function	I/O circuit
16	XOUT			
1	XIN	Crystal resonator	For reference frequency	TYPE A
2	V _{ss}			
3	RPD	Phase comparator output	This is LO if the locally divided value is higher than the reference frequency, HI if it is lower, and Z if it matches.	TYPE E
4	P-R			
5	RON	Output port	This is controlled by the input data.	TYPE D
6	F-R	VCO input	Local input for reception	TYPE F
7	CE			
8	CK	Chip enable clock signal serial data	When CE is HIGH, the DA synchronized to the rise of CK is read into the internal shift register, and is latched at the timing of the CE fall.	TYPE B
9	DA			
10	LD	Unlock output	This goes ON when the PLL is unlocked on the transmission side	TYPE D
11	F-T	VCO input	Local input for transmission	TYPE F
12	TON			
13	P-T	Output port	This is controlled by the input data	TYPE D
14	TPD	Phase comparator output	This is LO if the locally divided value is higher than the reference frequency, HI if it is lower, and Z if it matches.	TYPE E
15	V _{dd}	Power supply	2.5~5.5V	

2. FL DISPLAY

VFD (HCA-18MS03T) (F701)

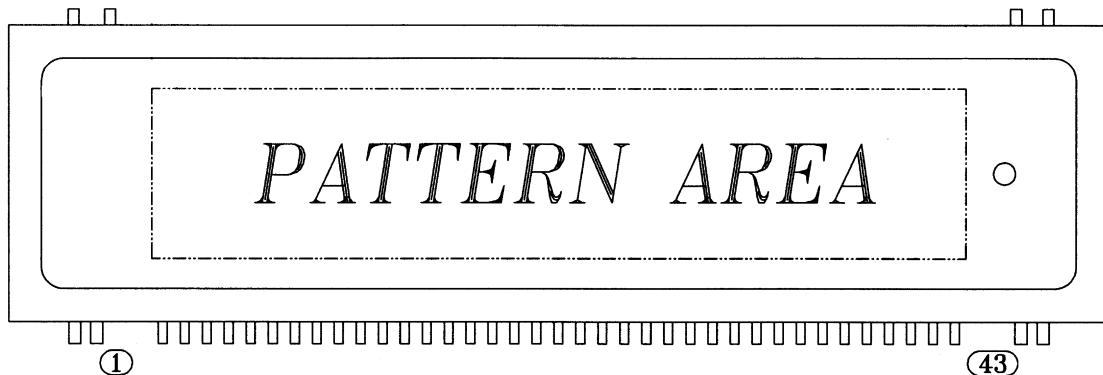

PIN CONNECTION

PIN NO.	1	2	3	4~14	15~29	30	31	32	33	34	35	36	37	38	39	40	41	42	43
CONNECTION	F1	NP	NP	NC	NX	TEST	D0	DA	CP	CS	RESET	OSCO	VDD	VDISP	D-GND	L-GND	NP	NP	F2

◎ Note ◎


1) Fn : Filament pin

2) NP : No pin

3) NX : No extended pin

4) NC : No connection. NC pin should be electrically open on the PC board.

GRID ASSIGNMENT

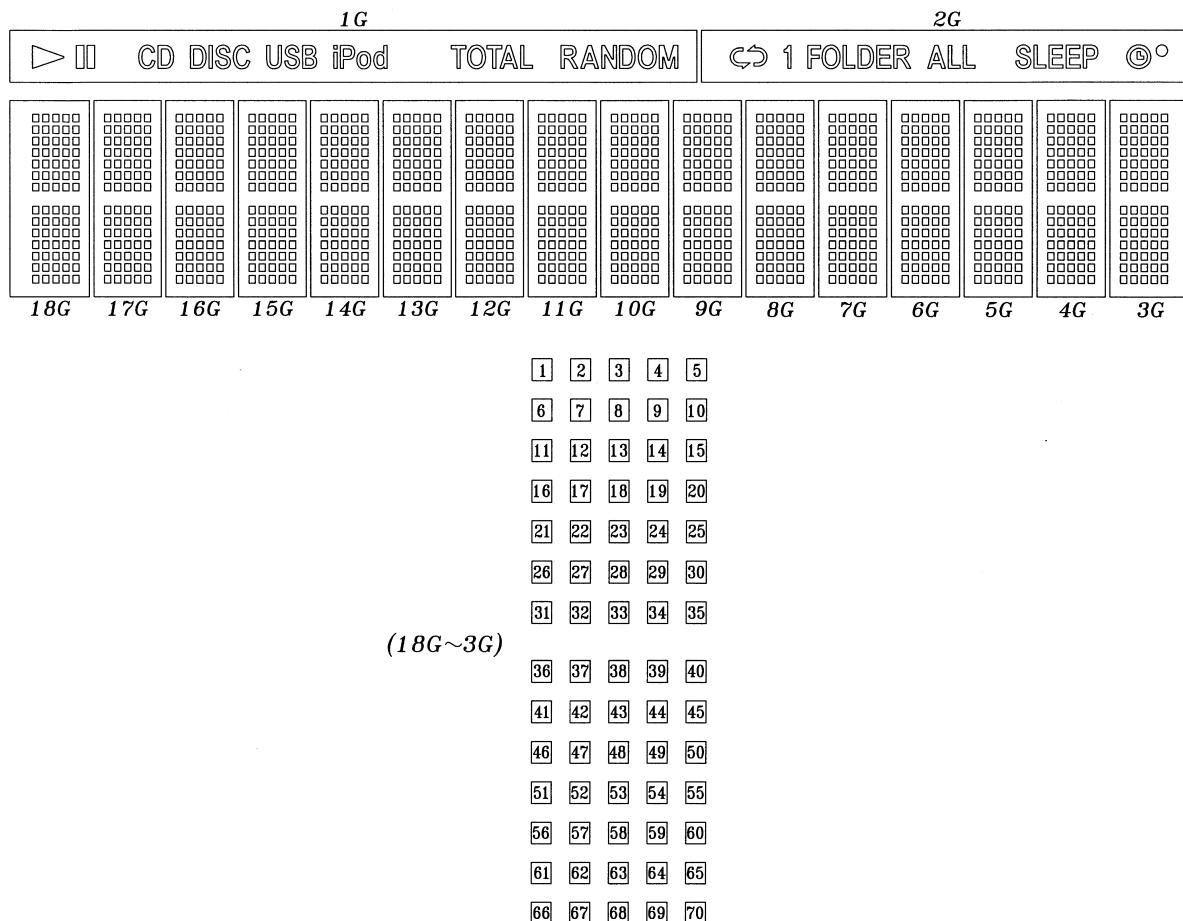

ANODE CONNECTION


	<i>COM18--COM3</i>	<i>COM2</i>	<i>COM1</i>
	<i>18G--3G</i>	<i>2G</i>	<i>1G</i>
SEGB 1	1	○	RANDOM
SEGB 2	2	◎	TOTAL
SEGB 3	3	SLEEP	iPod
SEGB 4	4	ALL	USB
SEGB 5	5	FOLDER	DISC
SEGB 6	6	1	CD
SEGB 7	7	⟳	
SEGB 8	8		▶
SEGB 9	9		
SEGB 10	10		
SEGB 11	11		
SEGB 12	12		
SEGB 13	13		
SEGB 14	14		
SEGB 15	15		
SEGB 16	16		
SEGB 17	17		
SEGB 18	18		
SEGB 19	19		
SEGB 20	20		
SEGB 21	21		
SEGB 22	22		
SEGB 23	23		
SEGB 24	24		
SEGB 25	25		
SEGB 26	26		
SEGB 27	27		
SEGB 28	28		
SEGB 29	29		
SEGB 30	30		
SEGB 31	31		
SEGB 32	32		
SEGB 33	33		
SEGB 34	34		
SEGB 35	35		

	<i>COM18--COM3</i>	<i>COM2</i>	<i>COM1</i>
	<i>18G--3G</i>	<i>2G</i>	<i>1G</i>
SEGA 1	36		
SEGA 2	37		
SEGA 3	38		
SEGA 4	39		
SEGA 5	40		
SEGA 6	41		
SEGA 7	42		
SEGA 8	43		
SEGA 9	44		
SEGA 10	45		
SEGA 11	46		
SEGA 12	47		
SEGA 13	48		
SEGA 14	49		
SEGA 15	50		
SEGA 16	51		
SEGA 17	52		
SEGA 18	53		
SEGA 19	54		
SEGA 20	55		
SEGA 21	56		
SEGA 22	57		
SEGA 23	58		
SEGA 24	59		
SEGA 25	60		
SEGA 26	61		
SEGA 27	62		
SEGA 28	63		
SEGA 29	64		
SEGA 30	65		
SEGA 31	66		
SEGA 32	67		
SEGA 33	68		
SEGA 34	69		
SEGA 35	70		

--MEMO--


BLOCK DIAGRAM

BLOCK DIAGRAM

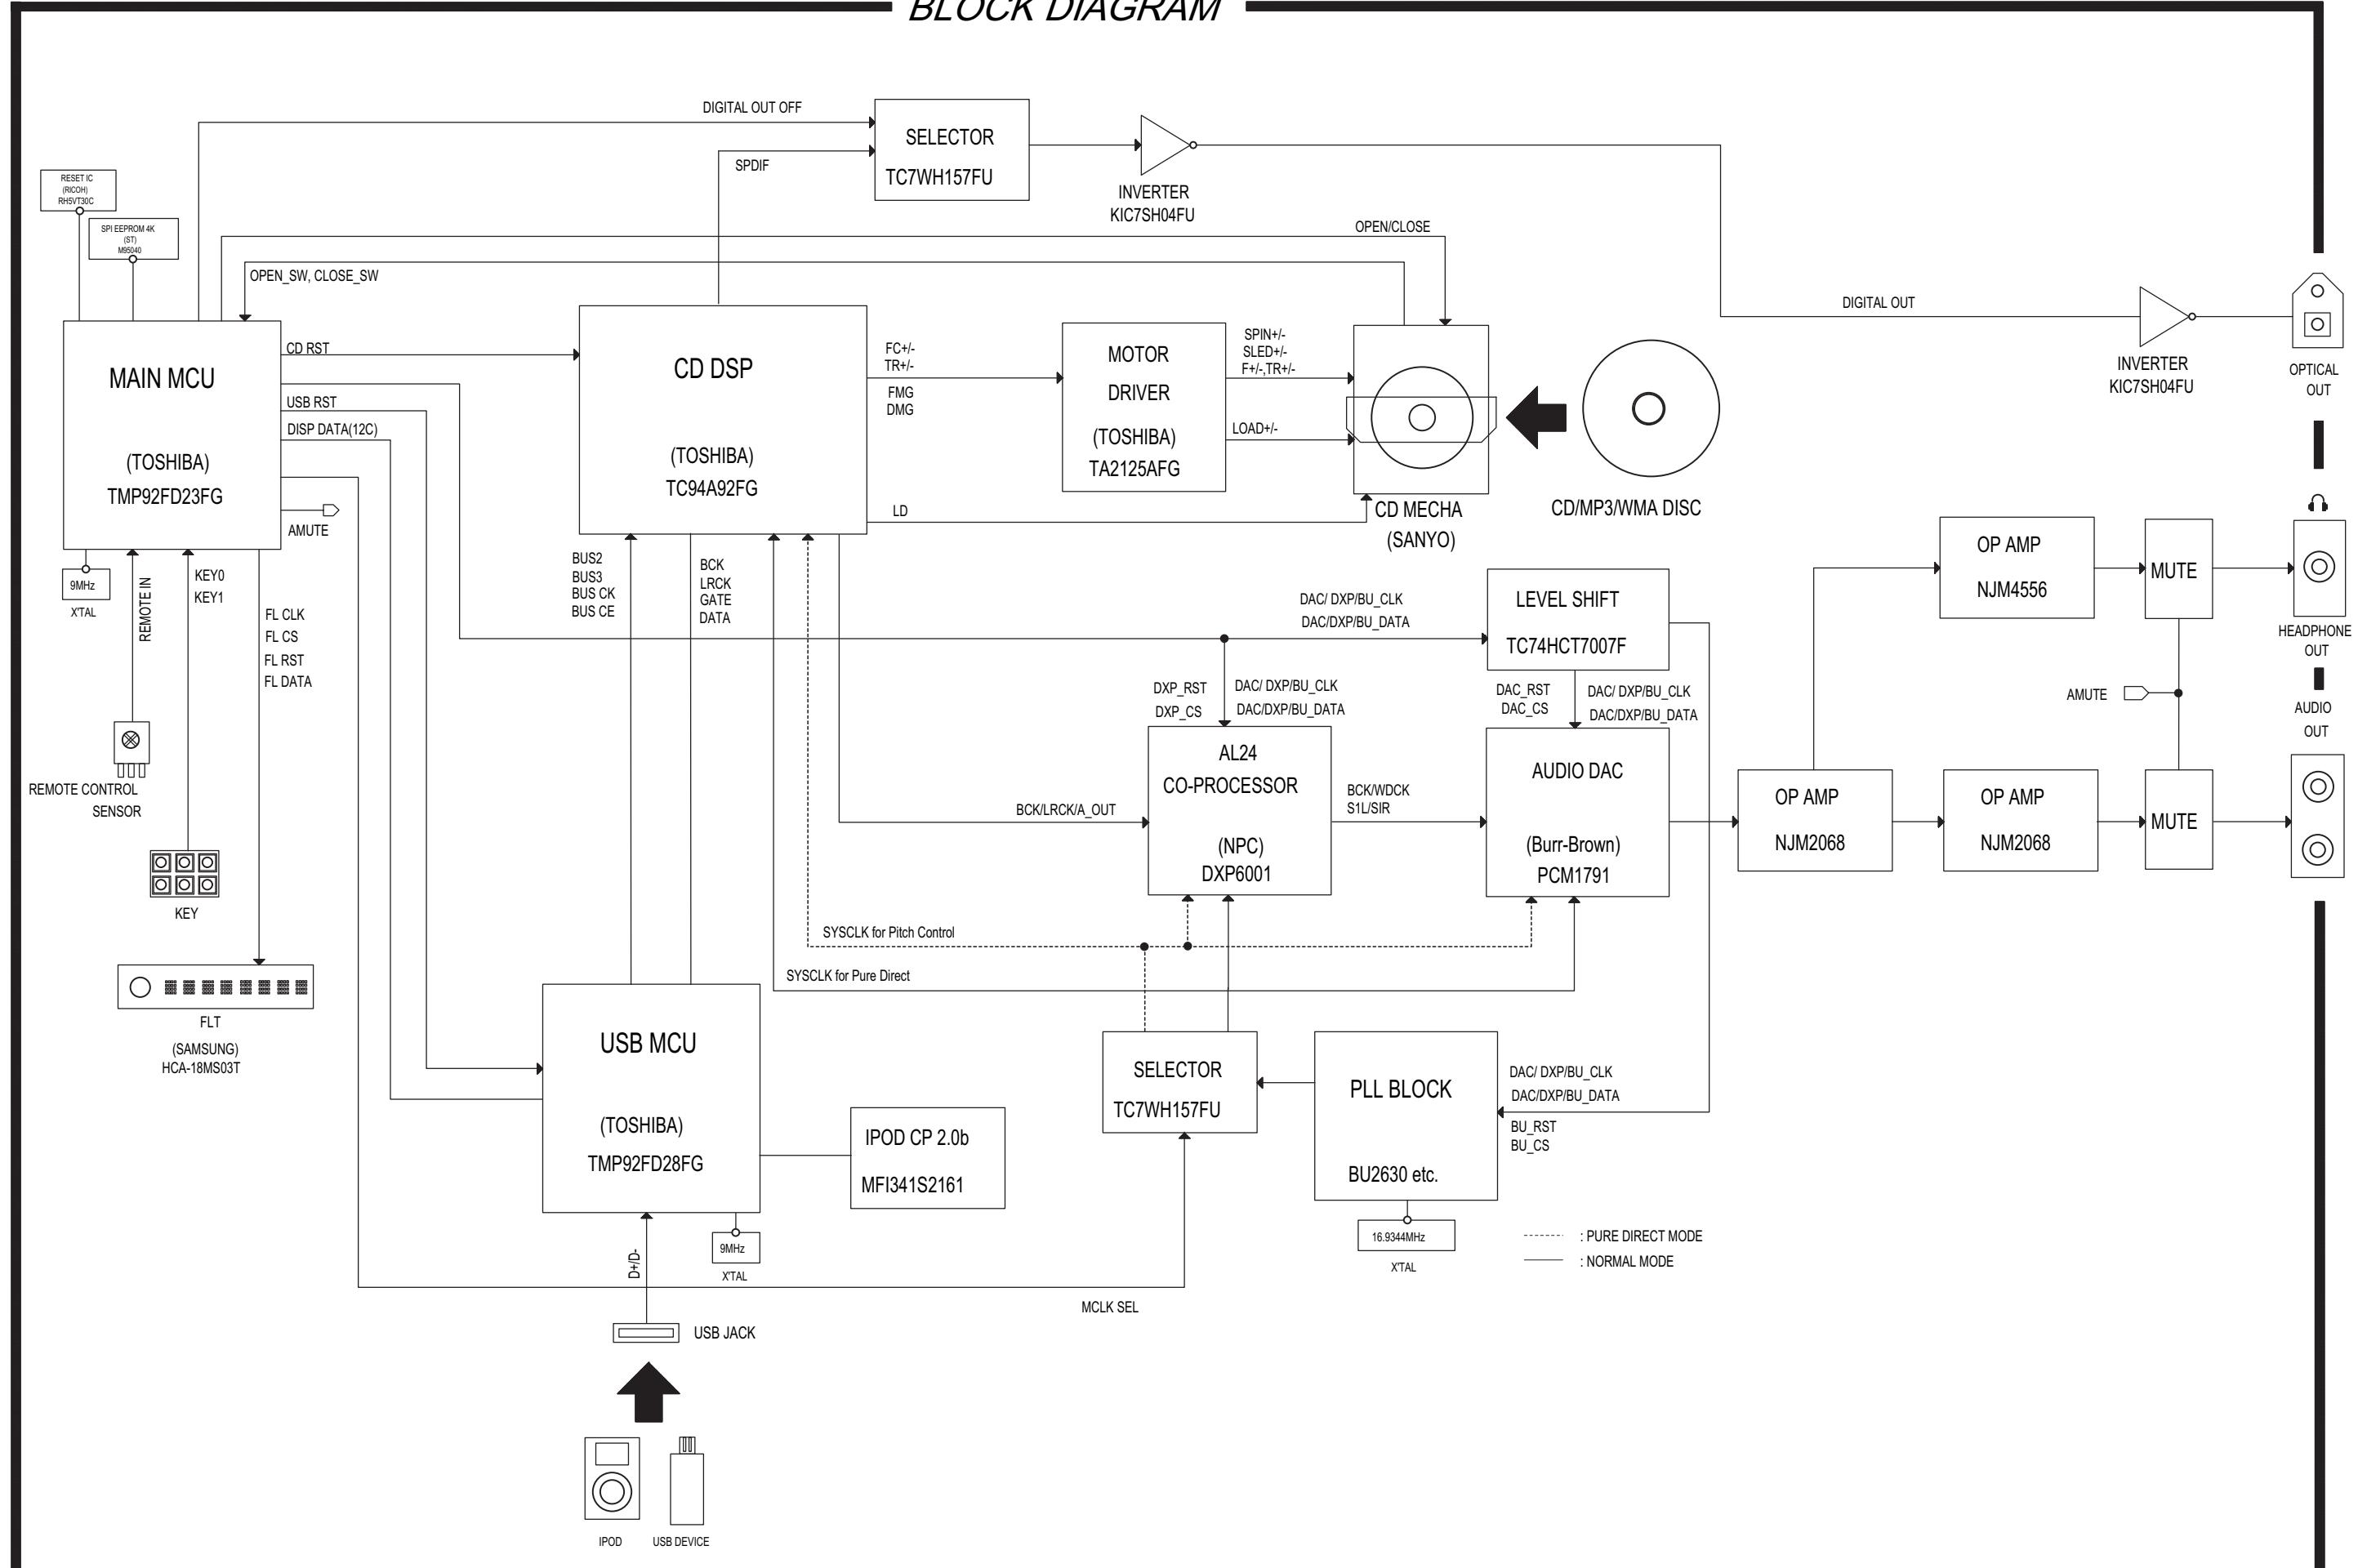


PRINTED WIRING BOARDS

AUDIO/POWER PCB ASSY (1/2)

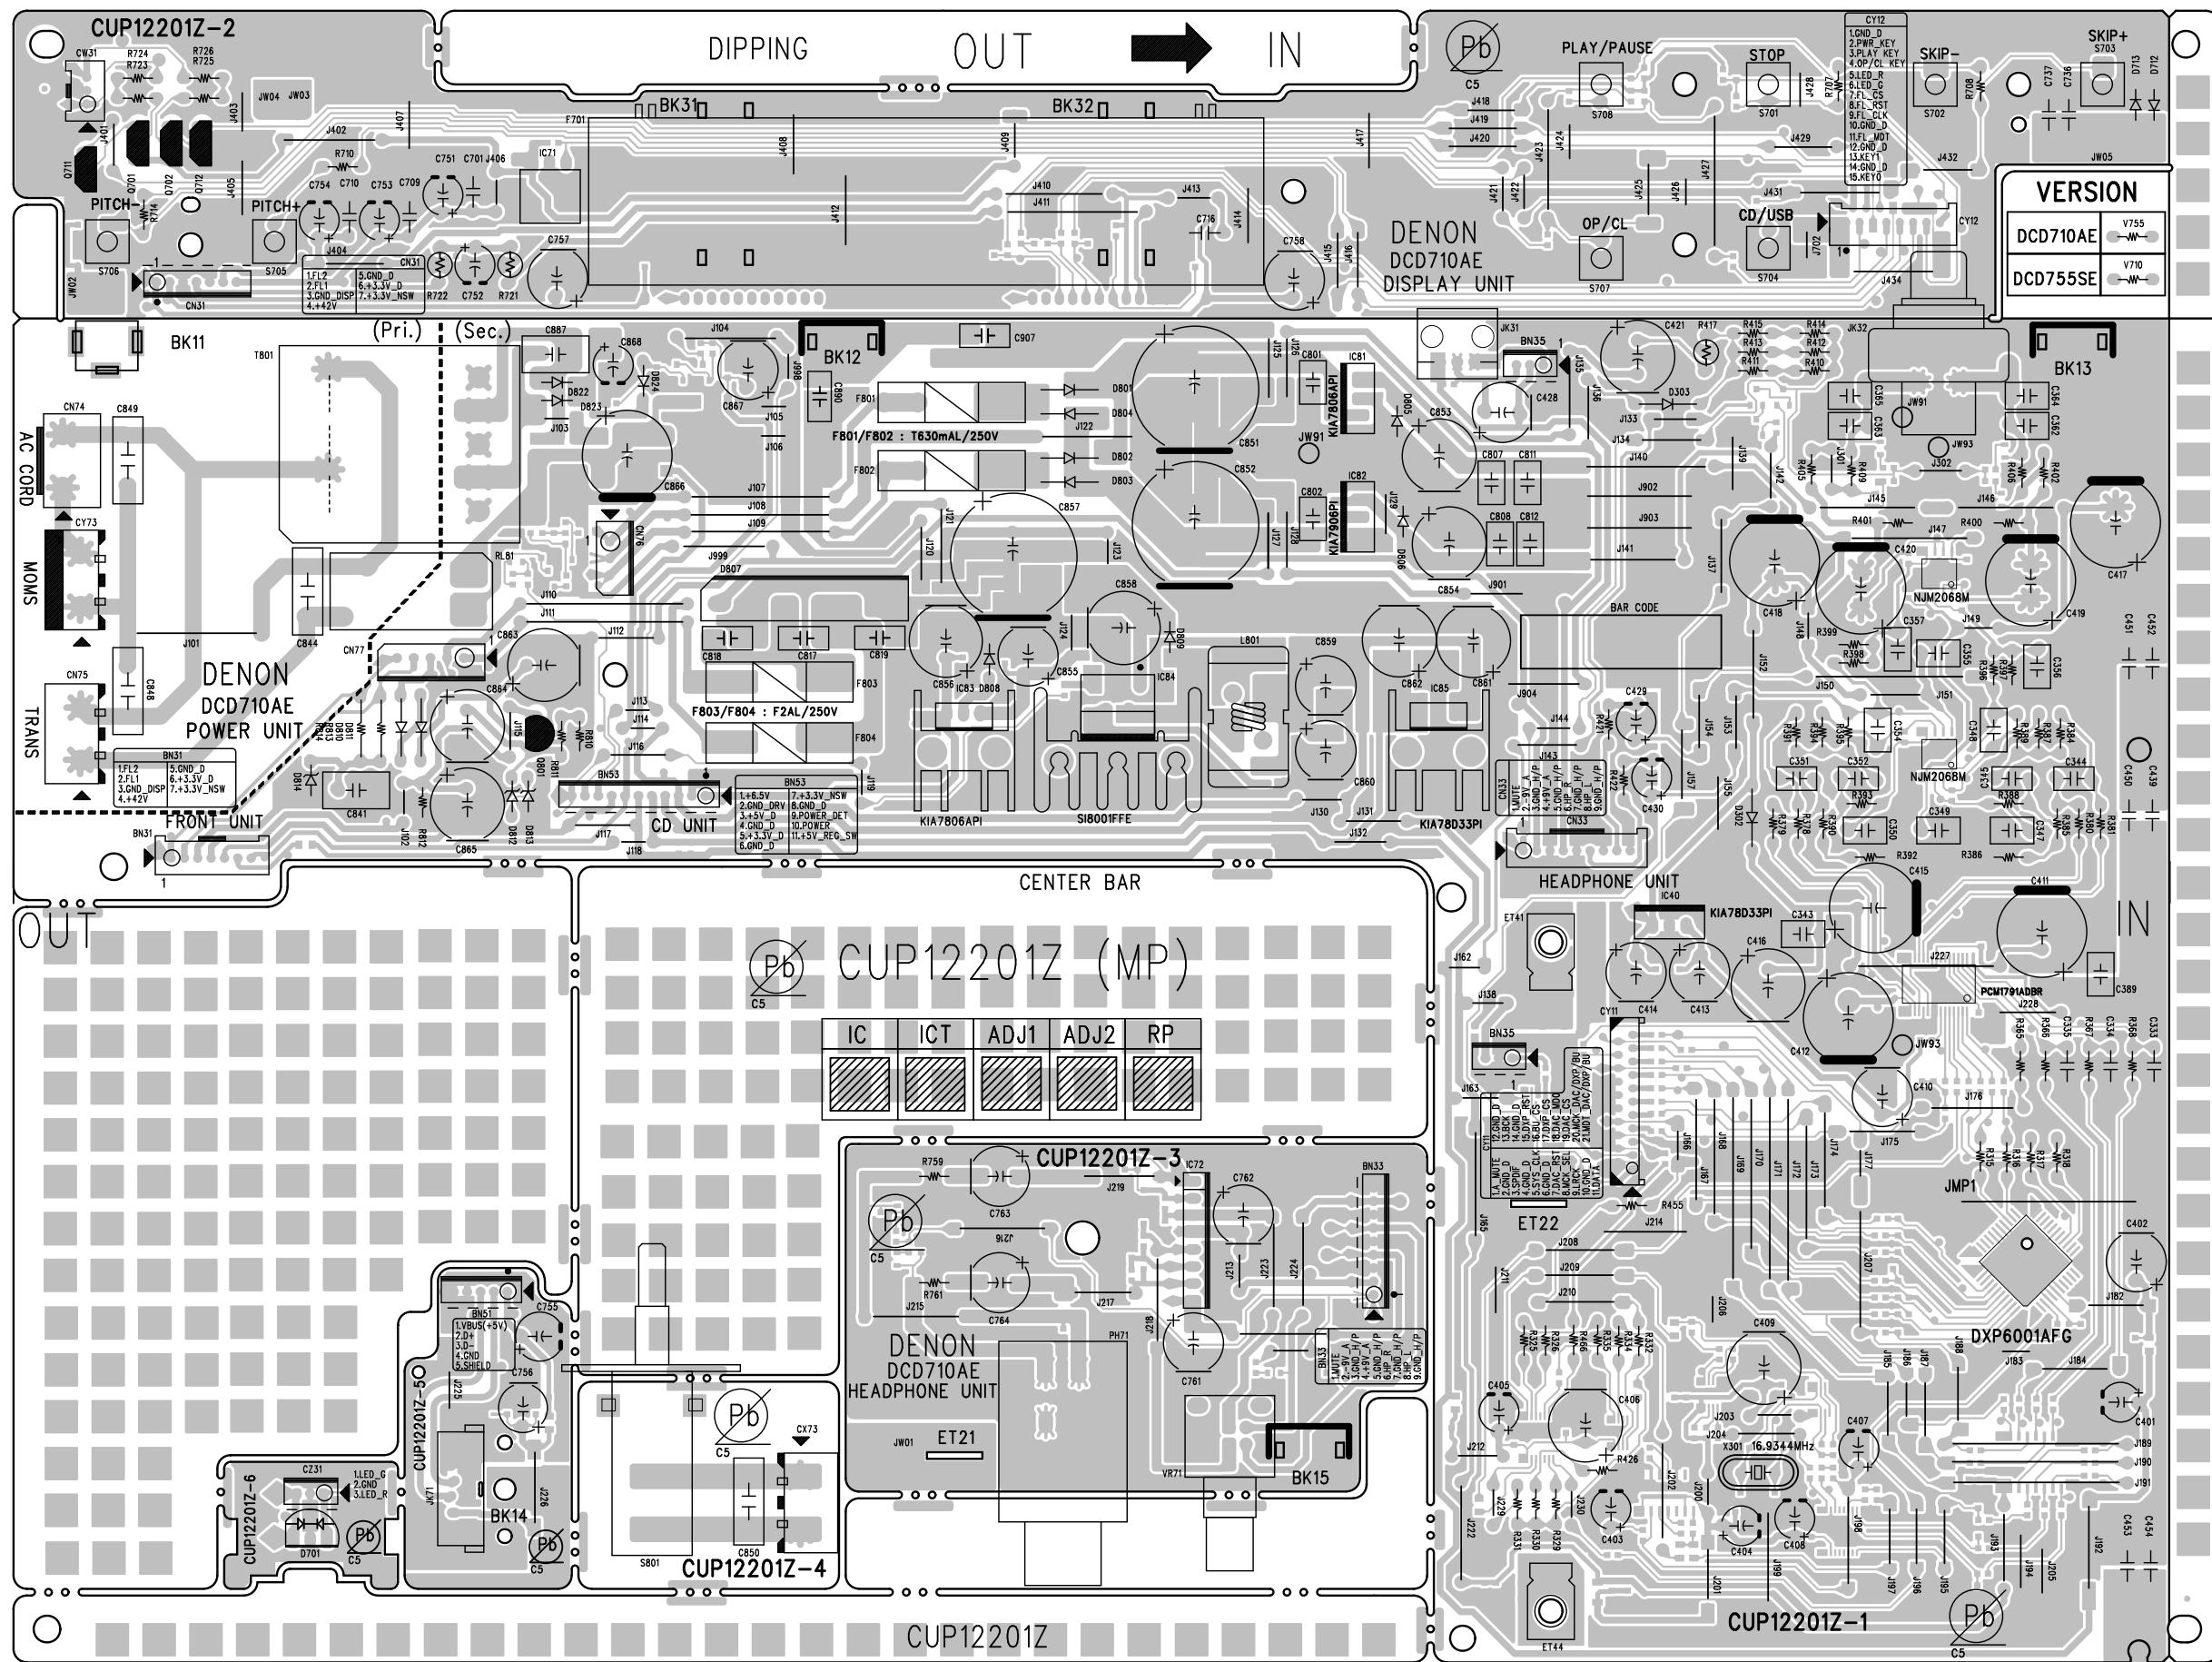


COMPONENT SIDE


AUDIO/POWER PCB ASSY (2/2)

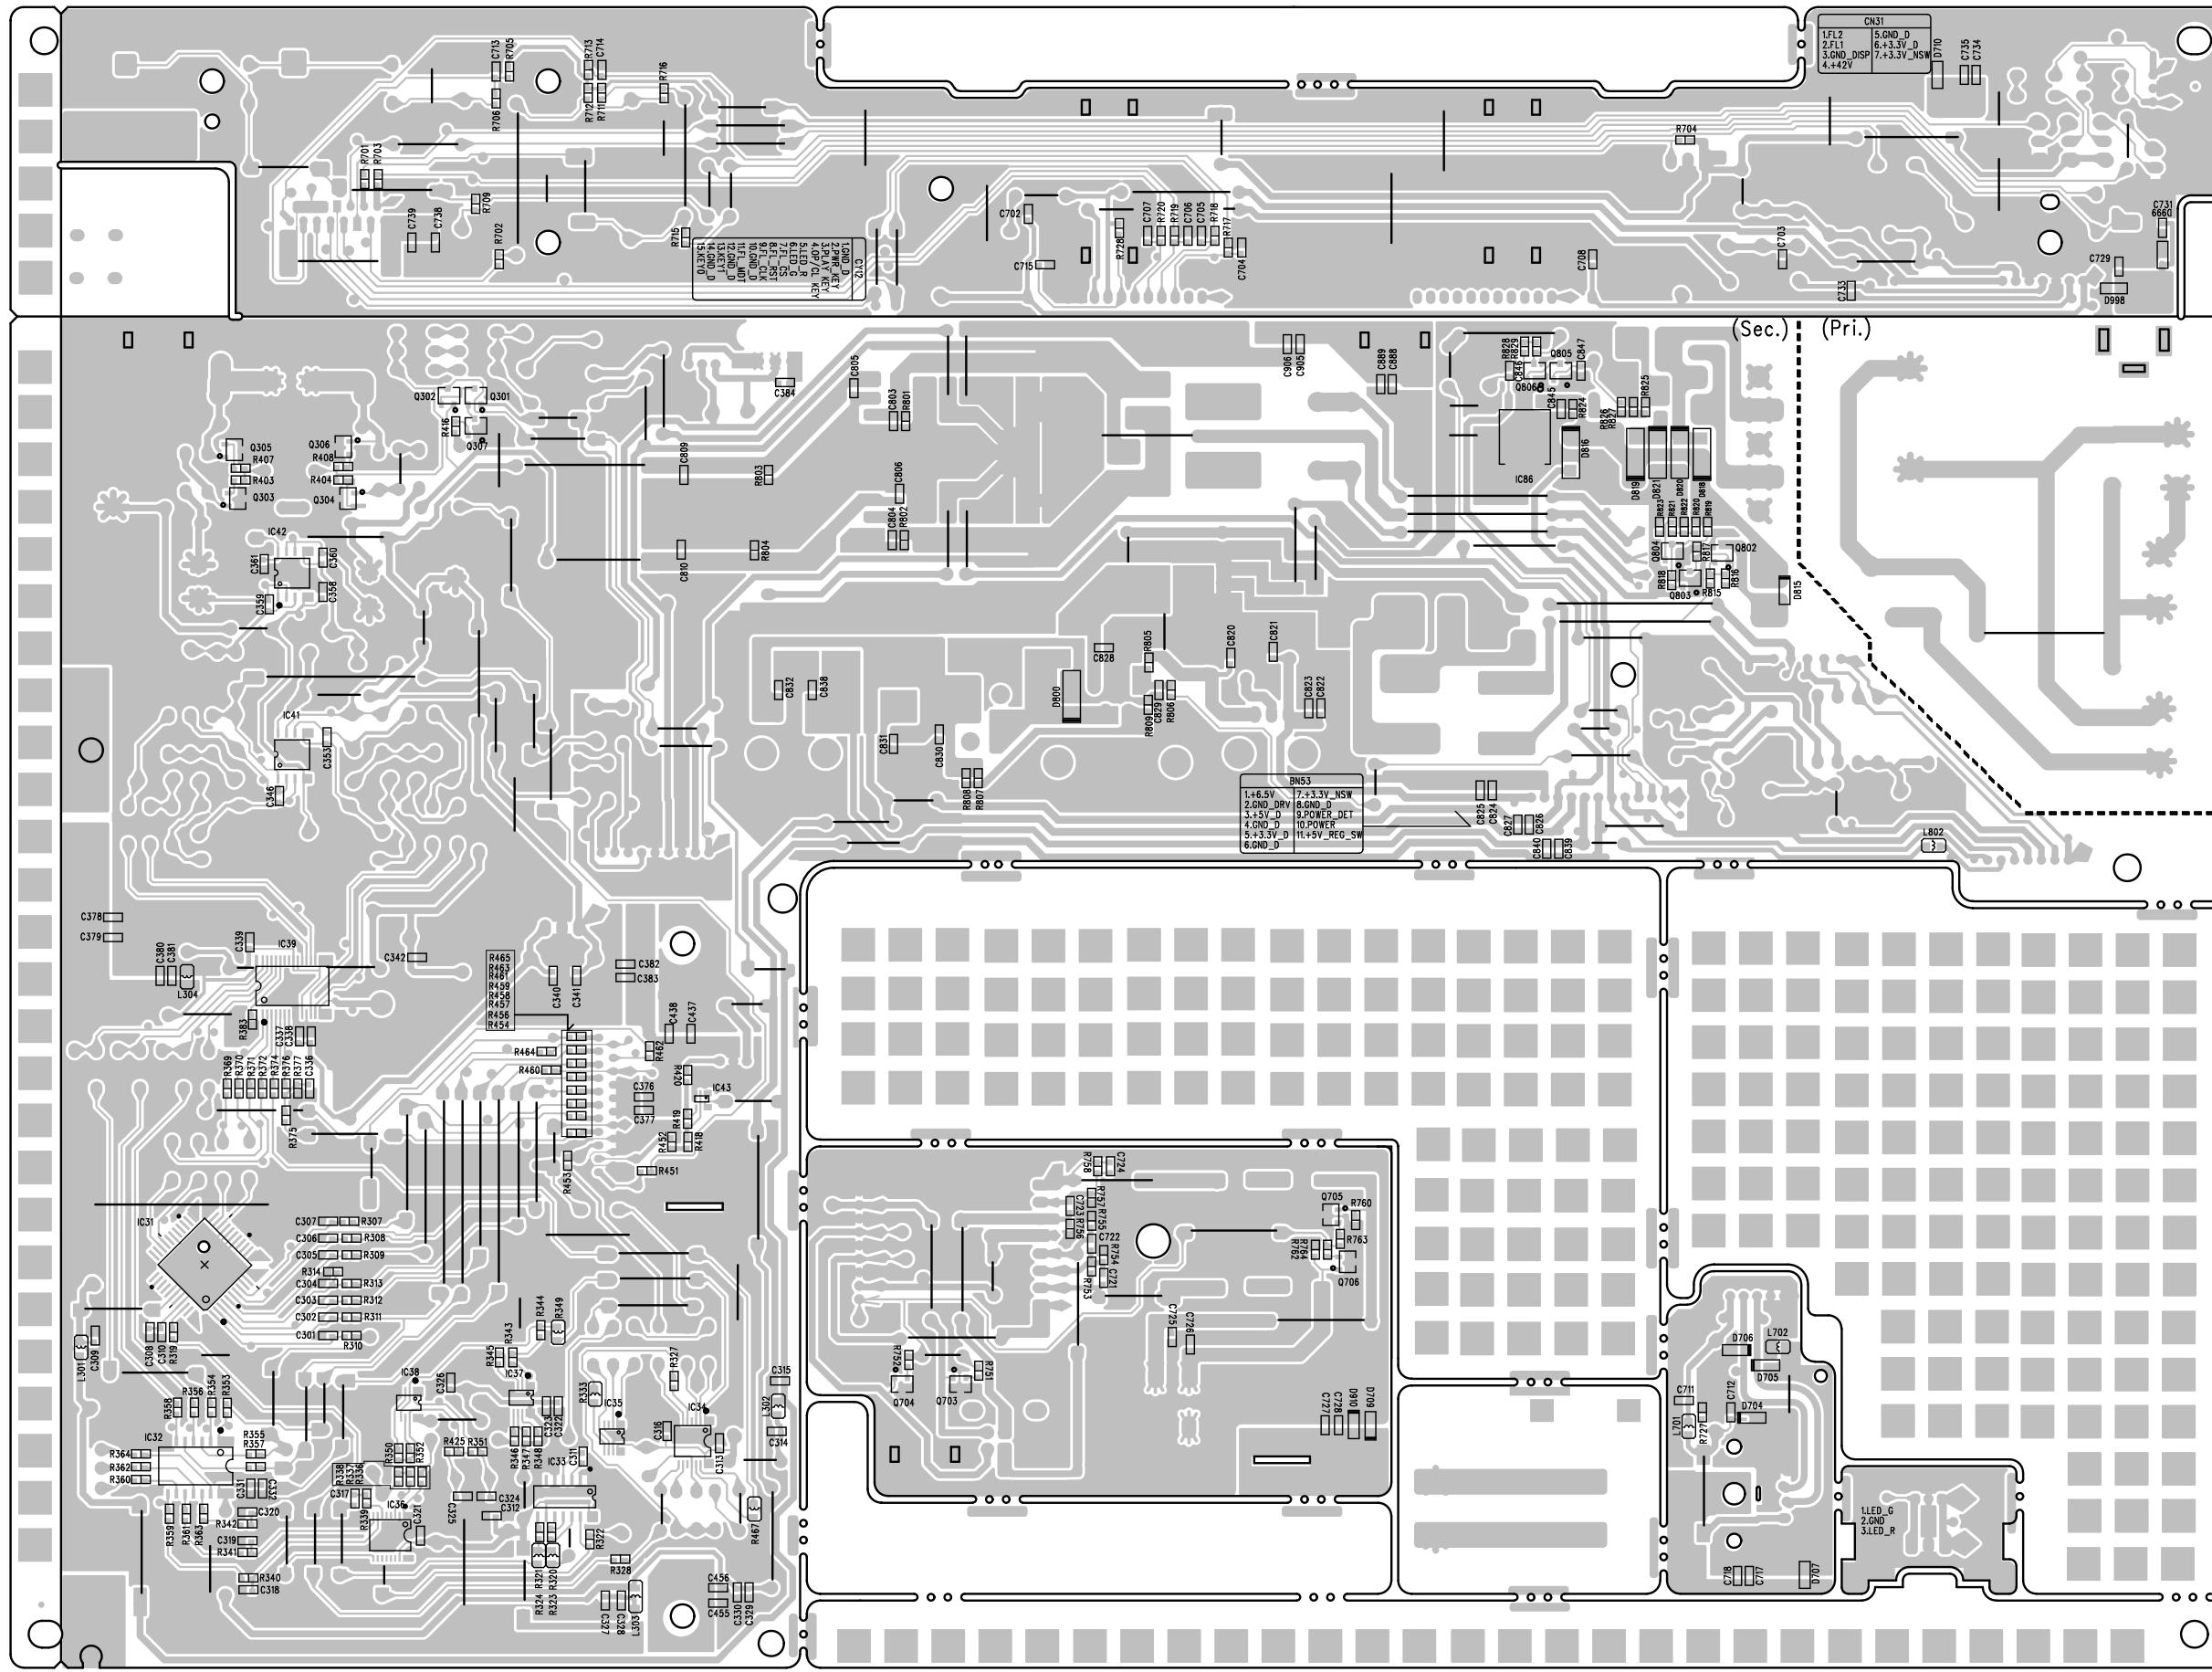

MAIN PCB ASSY

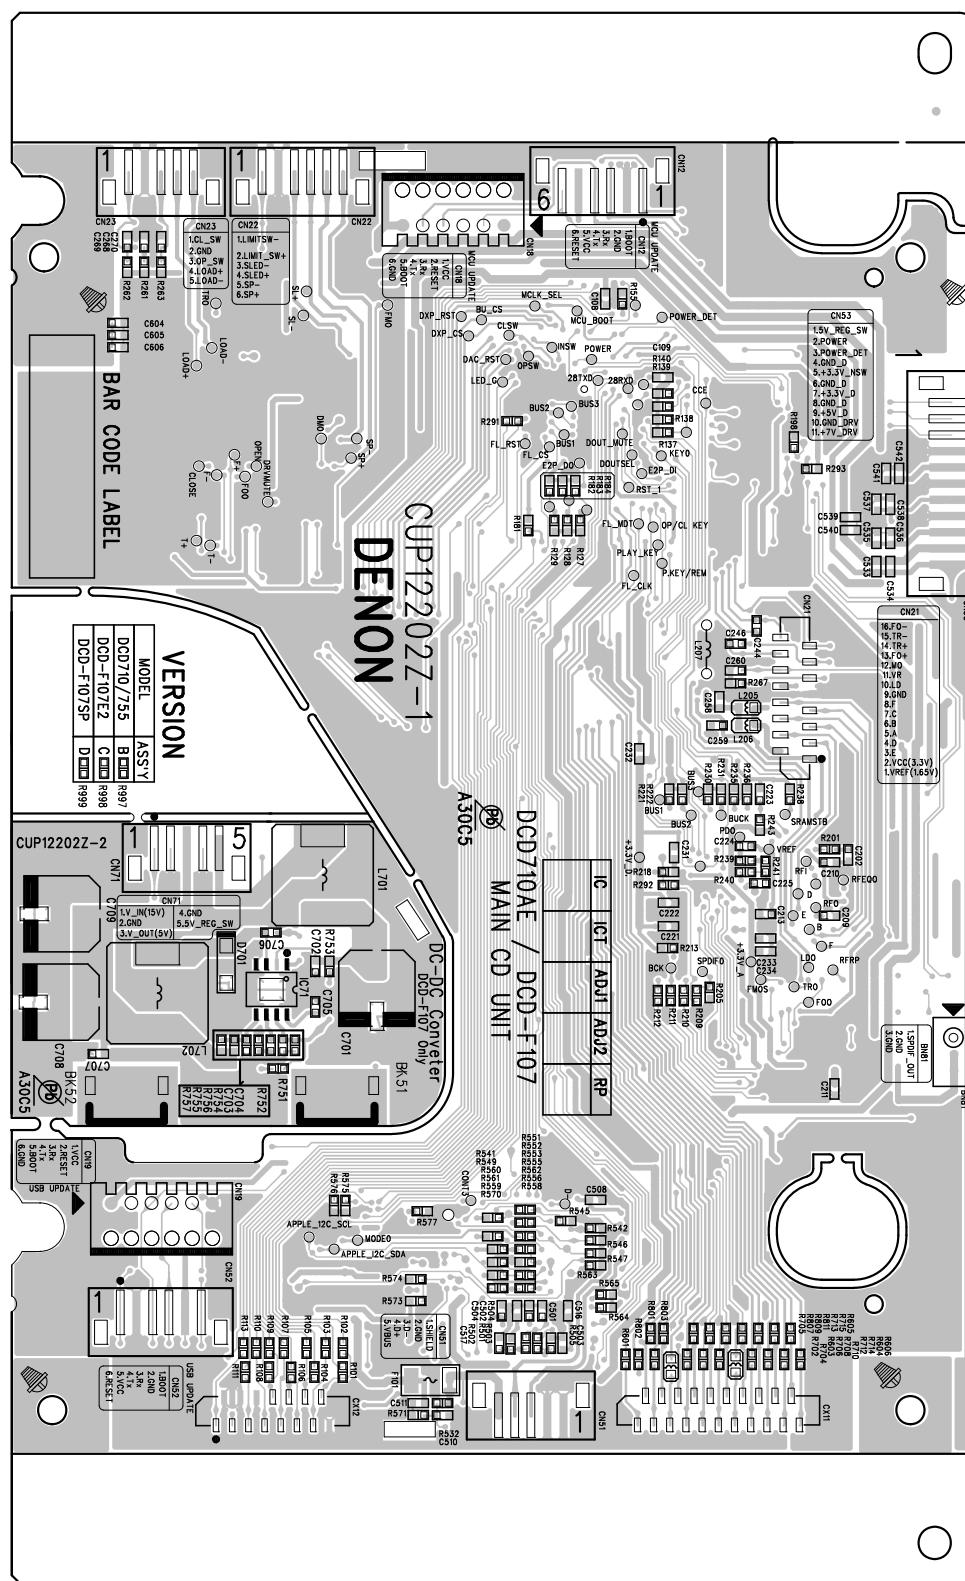

COMPONENT SIDE

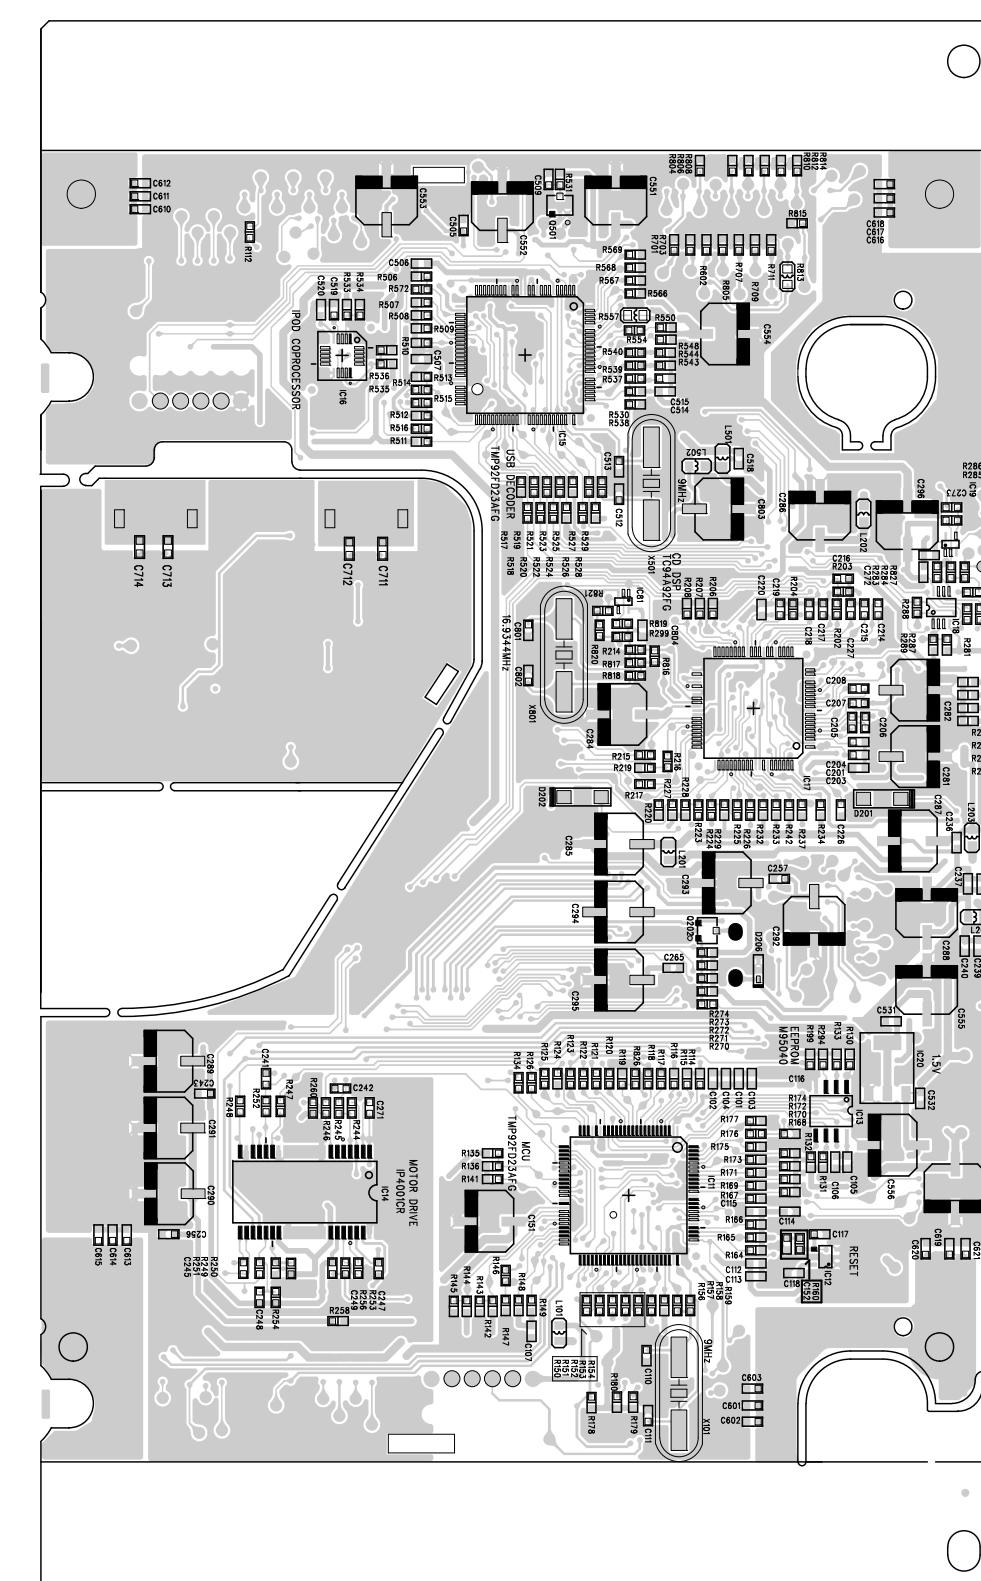

FOIL SIDE

NOTE FOR PARTS LIST

- Parts for which "nsp" is indicated on this table cannot be supplied.
- When ordering of part, clearly indicate "1" and "I" (i) to avoid mis-supplying.
- Ordering part without stating its part number can not be supplied.
- Part indicated with the mark "★" is not illustrated in the exploded view.
- Not including General-purpose Carbon Film Resistor in the P.W.Board parts list. (Refer to the Schematic Diagram for those parts.)
- Not including General-purpose Carbon Chip Resistor in the P.W.Board parts list. (Refer to the Schematic Diagram for those parts.)


WARNING:


Parts marked with this symbol  have critical characteristics.
Use ONLY replacement parts recommended by the manufacturer.

● Resistors

Ex.:	RN	14K	2E	182	G	FR
Type	Shape and performance	Power	Resist ance	Allowable error		Others
RD: Carbon	2B : 1/8 W	F : ±1%	P : Pulse-resistant type			
RC: Composition	2E : 1/4 W	G : ±2%	NL : Low noise type			
RS: Metal oxide film	2H : 1/2 W	J : ±5%	NB : Non-burning type			
RW: winding	3A : 1 W	K : ±10%	FR : Fuse-resistor			
RN: Metal film	3D : 2 W	M : ±20%	F : Lead wire forming			
RK: Metal mixture	3F : 3 W					
	3H : 5 W					

* Resistance


 \Rightarrow 1800ohm=1.8kohm
Indicates number of zeros after effective number.
2-digit effective number.


 \Rightarrow 1.2ohm
1-digit effective number.
2-digit effective number, decimal point indicated by R.
: Units: ohm

● Capacitors


Ex.:	CE	04W	1H	3R2	M	BP
Type	Shape and performance	Dielectric strength	Capacity	Allowable error	Others	
CE: Aluminum foil electrolytic	0J : 6.3 V	F : ±1%	HS : High stability type			
	1A : 10 V	G : ±2%	BP : Non-polar type			
CA: Aluminium solid electrolytic	1C : 16 V	J : ±5%	HR: Ripple-resistant type			
	1E : 25 V	K : ±10%	DL : For change and discharge			
CS: Tantalum electrolytic	1V : 35 V	M : ±20%	HF : For assuring high frequency			
CQ: Film	1H : 50 V	Z : ±80%	U : UL part			
CK: Ceramic	2A : 100 V	1 : -20%	C : CSA part			
CC: Ceramic	2B : 125 V	P : +100%	W : UL-CSA part			
CP: Oil	2C : 160 V	C : ±0.25pF	F : Lead wire forming			
CM: Mica	2D : 200 V	D : ±0.5pF				
CF: Metallized	2E : 250 V	= : Others				
CH: Metallized	2H : 500 V					
	2J : 630 V					


* Capacity (electrolyte only)

 \Rightarrow 2200 μ F
Indicates number of zeros after effective number.
2-digit effective number.
: Units: μ F.

 \Rightarrow 2.2 μ F
1-digit effective number.
2-digit effective number, decimal point indicated by R.
: Units: μ F.

* Capacity (except electrolyte)

 \Rightarrow 2200pF=0.0022 μ F
Indicates number of zeros after efective number.
(More than 2)
2-digit effective number.
: Units:pF

 \Rightarrow 220pF
Indicates number of zeros after numver.
(0 or 1)
2-digit effective number.
: Units:pF

· When the dielectric strength is indicated in AC, "AC" is included after the dielectric strength value.

PARTS LIST OF P.W.B. UNIT

* Parts for which "nsp" is indicated on this table cannot be supplied.

* The parts listed below are for maintenance only, might differ from the parts used in the unit in appearances or dimensions.

Note: The symbols in the column "Remarks" indicate the following destinations.

E2 : Europe model

E1C : China model

AUDIO/POWER PCB ASSY

	Ref No.	Part No.	Part Name	Remark		Q'ty	New
SEMICONDUCTORS GROUP							
	IC31	00D2623629002	IC AL24 PROCESSING DSP				
	IC32	00D2622376903	IC		HVITC74HCT7007F		
	IC33	90M-HC700560R	IC VCO		HVITC74LS628		
	IC34	00D2623077900	IC HEX INVERTER		HVITC74VHCU04FT		
	IC35	00D2623601907	IC 2CH MULTIPLXER		HVITC7WH157FU		
	IC36	00MHC1022521Z	IC DUAL PLL SYNTHESIZER		BVIBU2630FV-E2		
	IC37	00D2623199901	IC D FLIP FLOP		CVITC7WH74FU		
	IC38	00D2623489909	IC INVERTER(CMOS)		CVITC7WHU04FU		
	IC39	00D2623332904	IC D/A CONVERTER		HVIPCM1791ADBR		
	IC40	00D2631243001	I.C REGULATOR		CVIKIA78D33PI		
	IC41,42	00D2630896909	IC OP AMP		HVINJM2068MDTE1		
	IC43	943239006810S	IC SIGNAL INVERTER (USV)		CVIKIC7SH04FU		
	IC71	00D9430194706	REMOCON SENSOR		CRVKSM603TH2E		
	IC72	00MHC10200090	I.C HEADPHONE		HVINJM4556AL		
	IC81	00D2631100018	I.C REGULATOR +6V		HVIKIA7806API		
	IC82	00MHC3990699F	I.C -6V REGULATOR (TO220IS)		CVIKIA7906PI		
	IC83	00D2631100018	I.C REGULATOR +6V		HVIKIA7806API		
	IC84	00D2631285001	IC REGULATOR		CVISI8001FFE		
	IC85	00D2631243001	IC REGULATOR		CVIKIA78D33PI		
	IC86	00D2622944946	IC REGULATOR (3.3V SMD)		BVIBA33BC0FP		
	Q301,302	00D2730477901	CHIP TR		HVTKRA107S		
	Q303,304	00D2730460905	CHIP TR		HVTKTC2875B		
	Q307	00D9630121606	TR KRC107S		HVTKRC107S		
	Q701,702	00D2690184907	CHIP TR		HVTKRA102S		
	Q703-706	00M-HX900010R	CHIP TR (MUTE)		HVTKTD1304T		
	Q711,712	00D2690192902	CHIP TR		HVTKRC102S		
⚠	Q801	943219006820S	TR		CVTKTC1027YT		
⚠	Q802	00D2730464901	CHIP TR		HVTKTC3875SYRTK		
	Q805,806	00D2730464901	CHIP TR		HVTKTC3875SYRTK		
	D302,303	00D9430182502	DIODE 1N4003		CVD1N4003T		
	D701	00D9430198100	LED SML1216W		HVDMSL1216W		
	D704-706	00D2760717903	DIODE 1SS355T		HVD1SS355T		
	D707	943209006830S	DIODE ESD PROTECTION USC		CVDPG05GBUSCRTKP		
	D708	00D2760717903	DIODE 1SS355T		HVD1SS355T		
	D709	943209006830S	DIODE ESD PROTECTION USC		CVDPG05GBUSCRTKP		
	D710	00D2760717903	DIODE 1SS355T		HVD1SS355T		
	D712	00D2760717903	DIODE 1SS355T		HVD1SS355T		
	D713	00D2760717903	DIODE 1SS355T		HVD1SS355T		
	D800	943204006840S	DIODE , SCHOTTKY (40V,3A, DO-214AC)		CVDSS34SR		
	D801-804	00D9430182502	DIODE 1N4003		CVD1N4003T		
	D805,806	00D9430086404	DIODE 1SS133T-77		HVD1SS133MT		
⚠	D807	90M-HE200390R	BRIDGE DIODE		HVDGBTJ1006		
	D808,809	00D9430086404	DIODE 1SS133T-77		HVD1SS133MT		
	D810,811	00D9430182502	DIODE 1N4003		CVD1N4003T		
	D812	00D9430087102	DIODE MTZJ20B 1/2W		HVDMTZJ20BT		
	D813	00D2760762916	DIODE MTZJ27B 1/2W		HVDMTZJ27BT		
	D814	00D2760760905	DIODE MTZJ3.6B 1/2W		HVDMTZJ3.6BT		
	D815	00D2760717903	DIODE 1SS355T		HVD1SS355T		
	D816	943204006850S	DIODE , SCHOTTKEY BARRIER HK		HVRD160L60TE25		
	D818-821	943204006850S	DIODE , SCHOTTKEY BARRIER HK		HVRD160L60TE25		

	Ref No.	Part No.	Part Name	Remark		Q'ty	New
D822-824 D910	00D9430086404 00D2760717903	DIODE 1SS133T-77 DIODE 1SS355T			HVD1SS133MT HVD1SS355T		
D998,999	943209006830S	DIODE , ESD PROTECTION USC			CVDPG05GBUSCRTKP		
RESISTORS GROUP							
R417 R721,722	00D2442051961 00D9430092906	METAL OXIDE RES 100 ohm 1W J FUSE RES 10 ohm (5%)			KRG1SANJ101RT KRQ12AJ100RT		
R808 R809 VR71	nsp nsp 00D9430196908	CHIP RES 1% CHIP RES 1% 820 ohm VARIABLE RES			CRJ10DF2002T CRJ10DF8200T CVV2J02B103Z		
CAPACITORS GROUP							
C301-303 C304 C308 C309	nsp nsp nsp nsp	CHIP CAP CHIP CAP CHIP CAP CHIP CAP			CCUS1H101JA CCUS1H104KC CCUS1H102KC CCUS1H103KC		
C310 C311 C312-316 C317 C321	nsp nsp nsp nsp nsp	CHIP CAP CHIP CAP CHIP CAP CHIP CAP CHIP CAP			CCUS1H104KC CCUS1H220JA CCUS1H104KC CCUS1H103KC CCUS1H104KC		
C322 C323 C324,325 C326 C327	nsp nsp nsp nsp nsp	CHIP CAP CHIP CAP CHIP CAP CHIP CAP CHIP CAP			CCUS1H103KC CCUS1H104KC CCUS1H100JA CCUS1H104KC CCUS1H103KC		
C328,329 C330,331 C332 C336,337 C338	nsp nsp nsp nsp nsp	CHIP CAP CHIP CAP CHIP CAP CHIP CAP CHIP CAP			CCUS1H104KC CCUS1H103KC CCUS1H104KC CCUS1H104KC CCUS1H103KC		
C339 C340-342 C343 C344 C345	nsp nsp nsp nsp nsp	CHIP CAP CHIP CAP PP CAP (100V/0.01uF) MYLAR CAP MYLAR CAP			CCUS1H104KC CCUS1H103KC CCMP2A103JN09T HCQI1H182JZT HCQI1H272JZT		
C347,348 C349 C350 C351 C352	nsp nsp nsp nsp nsp	PP CAP (100V/680pF) PP CAP (100V/0.01uF) PP CAP (100V/680pF) MYLAR CAP MYLAR CAP			CCMP2A681JN09T CCMP2A103JN09T CCMP2A681JN09T HCQI1H182JZT HCQI1H272JZT		
C354 C355 C356,357 C358 C361	nsp nsp nsp nsp nsp	PP CAP (100V/680pF) PP CAP (100V/0.01uF) PP CAP (100V/2700pF) CHIP CAP CHIP CAP			CCMP2A681JN09T CCMP2A103JN09T CCMP2A272JN09T CCUS1H103KC CCUS1H103KC		
C376 C377 C378 C379 C380	nsp nsp nsp nsp nsp	CHIP CAP CHIP CAP CHIP CAP CHIP CAP CHIP CAP			CCUS1H103KC CCUS1H104KC CCUS1H103KC CCUS1H104KC CCUS1H103KC		
C381 C382,383 C384 C389 C401	nsp nsp nsp nsp 00D9430185402	CHIP CAP CHIP CAP CHIP CAP PP CAP (100V/0.01uF) ELECT CAP (ELNA RFO 100uF/25V)			CCUS1H104KC CCUS1H103KC CCUS1H104KC CCMP2A103JN09T CCEA1ERFO101T		
C402 C403-405 C406 C407	00D2544693939 nsp 00MOA227016R0 nsp	ELEC CAP ELNA RFO 100uF/50V ELECT CAP ELECT CAP (220uF/16V, ROA) ELECT CAP			CCEA1HRFO101T CCEA1CH101T CCEA1CROA221E CCEA1HH1R0T		

	Ref No.	Part No.	Part Name	Remark		Q'ty	New
C408	nsp	ELECT CAP			CCEA1CH101T		
C409	00MOA227016R0	ELECT CAP (220uF/16V, ROA)			CCEA1CROA221E		
C410	00D2544693939	ELEC CAP ELNA RFO 100uF/50V			CCEA1HRFO101T		
C411	00D2544750704	ELECT CAP (470uF/50V, RFO, 12.5X20)			CCEA1HRFO471E		
C412	943134006940S	ELECT CAP (47uF/50V, ROA, 10X16)			CCEA1HROA470T		
C413,414	00D2544693939	ELEC CAP ELNA RFO 100uF/50V			CCEA1HRFO101T		
C415	943134005080S	ELECT CAP (ELNA ROA 50V/100uF)			CCEA1HROA101E		
C416	00D2544695937	ELECT CAP (470uF/6.3V,RFO)			CCEA0JRFO471T		
C417,418	943134006940S	ELECT CAP (47uF/50V, ROA, 10X16)			CCEA1HROA470T		
C419,420	943134005080S	ELECT CAP (ELNA ROA 50V/100uF)			CCEA1HROA101E		
C421	943134005040S	ELECT CAP (ELNA RFOII 50V/220uF)			CCEA1HRFOII221E		
C428	00D2544693939	ELEC CAP ELNA RFO SERIES 100uF/50V			CCEA1HRFO101T		
C429,430	00D2544693926	ELECT CAP (ELNA, RFO, 50V/47uF)			CCEA1HRFO470T		
C437	nsp	CHIP CAP			CCUS1H104KC		
C438	nsp	CHIP CAP			CCUS1H103KC		
C439	nsp	CERAMIC CAP			CCBS1H103ZFT		
C450	nsp	CERAMIC CAP			CCBS1H104ZFT		
C451	nsp	CERAMIC CAP			CCBS1H103ZFT		
C452	nsp	CERAMIC CAP			CCBS1H104ZFT		
C453	nsp	CERAMIC CAP			CCBS1H103ZFT		
C454	nsp	CERAMIC CAP			CCBS1H104ZFT		
C455	nsp	CHIP CAP			CCUS1H103KC		
C456	nsp	CHIP CAP			CCUS1H104KC		
C701-703	nsp	CHIP CAP			CCUS1H104KC		
C704-406	nsp	CHIP CAP			CCUS1H101JA		
C707-714	nsp	CHIP CAP			CCUS1H104KC		
C715	nsp	CHIP CAP			CCUS1H150JA		
C716	nsp	CERAMIC CAP			CCBS1H104ZFT		
C717	nsp	CHIP CAP			CCUS1H104KC		
C718	nsp	CHIP CAP			CCUS1H103KC		
C721	nsp	CHIP CAP			CCUS1H151JA		
C722,723	nsp	CHIP CAP			CCUS1H181JA		
C724	nsp	CHIP CAP			CCUS1H151JA		
C725,726	nsp	CHIP CAP			CCUS1H181JA		
C727	nsp	CHIP CAP			CCUS1H104KC		
C728	nsp	CHIP CAP			CCUS1H103KC		
C729	nsp	CHIP CAP			CCUS1H104KC		
C733,734	nsp	CHIP CAP			CCUS1H104KC		
C735	nsp	CHIP CAP			CCUS1H103KC		
C736	nsp	CERAMIC CAP			CCBS1H104ZFT		
C737	nsp	CERAMIC CAP			CCBS1H103ZFT		
C738	nsp	CHIP CAP			CCUS1H104KC		
C739	nsp	CHIP CAP			CCUS1H103KC		
C751	nsp	ELECT CAP			CCEA1CKS470T		
C752	nsp	ELECT CAP			CCEA1HKS100T		
C753,754	nsp	ELECT CAP			CCEA1CKS470T		
C755	nsp	ELECT CAP			CCEA1HKS100T		
C756	nsp	ELECT CAP			CCEA1CKS101T		
C761-764	00D2544693939	CAP , ELEC ELNA RFO 100uF/50V			CCEA1HRFO101T		
C801,802	nsp	PP CAP (100V/0.01uF)			CCMP2A103JN09T		
C803-806	nsp	CHIP CAP			CCUS1H104KC		
C807,808	nsp	PP CAP (100V/0.01uF)			CCMP2A103JN09T		
C809,810	nsp	CHIP CAP			CCUS1H103KC		
C817-819	nsp	CAP , METALLIZED FILM			CCME2A104JXT		
C820,821	nsp	CHIP CAP			CCUS1H104KC		
C822	nsp	CHIP CAP			CCUS1H103KC		
C823,824	nsp	CHIP CAP			CCUS1H104KC		
C825	nsp	CHIP CAP			CCUS1H103KC		
C826	nsp	CHIP CAP			CCUS1H104KC		
C827	nsp	CHIP CAP			CCUS1H103KC		
C828-830	nsp	CHIP CAP			CCUS1H104KC		

	Ref No.	Part No.	Part Name	Remark	Q'ty	New
	C831	nsp	CHIP CAP		CCUS1H102KC	
	C832	nsp	CHIP CAP		CCUS1H104KC	
	C838	nsp	CHIP CAP		CCUS1H104KC	
	C839	nsp	CHIP CAP		CCUS1H103KC	
	C840	nsp	CHIP CAP		CCUS1H104KC	
△	C841	nsp	CAP , MYLAR		HCQ1H104JZT	
	C844	nsp	CAP , CERAMIC(X1/Y2/SC)		KCKDKS472ME	
	C845,846	nsp	CHIP CAP		CCUS1H104KC	
	C847	nsp	CHIP CAP		CCUS1H102KC	
	C848,849	nsp	CAP , CERAMIC(X1/Y2/SC)		KCKDKS472ME	
	C851,852	943134006950S	ELECT CAP (3300uF/35V, RFA)		CCEA1VRFA332E	
	C853,854	134050059238S	CAP , ELECT (ELNA RFG, 50V/220uF, 85'C, 10X16)		CCEA1HRFY221E	
	C855	00D2544574922	EIECT CAP (220uF/50V, RA3)		CCEA1HRA3221E	
	C856	00D2544579707	CAP, ELECT (1000uF/35V, RA3, 12.5X20)		CCEA1VRA3102E	
	C857	00D2544763704	CAP , ELECT (ELNA RFO 35V/3300uF)		CCEA1VRFO332E	
	C858	943134006960S	CAP , ELECT(470uF/35V, RJH, 10X20)		CCEA1VRJH471E	
	C859,860	nsp	ELECT , CAP (1000uF/6.3V, 10*20, KJH)		CCEA0JKJH102ES	
	C861,862	00D2544694912	EIECT CAP (220uF/25V, RFO)		CCEA1ERFO221T	
	C863	00D2544692943	ELECT , CAP (1000uF/6.3V, 10*20, KJH)		CCEA0JKJH102ES	
	C864	00D2544574922	EIECT CAP (100uF/63V, RA3)		CCEA1JRA3101T	
	C865	00D2544692943	CAP , ELECT(100uF/63V, RFO, 10X12.5)		CCEA1JRFO101E	
	C866	00D2544749715	CAP , ELECT(1000uF/25V, RFO, 12.5X20)		CCEA1ERFO102E	
	C867	00D2544693939	CAP , ELEC ELNA RFO 100uF/50V		CCEA1HRFO101T	
	C868	nsp	CAP , ELECT		CCEA1HH4R7T	
	C887	nsp	CAP , METALLIZED FILM		CCME2A104JXT	
	C888	nsp	CHIP CAP		CCUS1H104KC	
	C889	nsp	CHIP CAP		CCUS1H103KC	
	C890	nsp	CAP , METALLIZED FILM		CCME2A104JXT	
	C905	nsp	CHIP CAP		CCUS1H104KC	
	C906	nsp	CHIP CAP		CCUS1H103KC	
	C907	nsp	CAP , METALLIZED FILM		CCME2A104JXT	

OTHERS PARTS GROUP

BK11	nsp	PCB BRACKET (A)		CMD1A188		
BK12	nsp	PCB BRACKET		CMD1A569		
BK13	nsp	PCB BRACKET		CMD1A569		
BK15	nsp	PCB BRACKET		CMD1A629		
BK31	nsp	FLT BRACKET		CMD1A468		
BK32	nsp	FLT BRACKET		CMD1A468		
BN31	nsp	WAFER 7PIN		CJP07GI236ZW		
BN33	nsp	WIRE ASS'Y(9P, 2.0MM, 400MM, SHIELD)		CWB1C909400EN001		
BN35	nsp	WIRE ASS'Y(3P, 2.0MM, 120MM, SHIELD)		CWB1C203120EE001		
BN51	nsp	WIRE ASS'Y(5P, 2.0MM, 250MM, SHIELD)		CWB1C205250EG001		
BN53	nsp	WIRE ASSY(11P, 2.0MM, 50MM)		CWB1C911050EG		
CN31	nsp	WIRE ASS'Y (7P,2.0MM,200MM)		CWB1C90720047		
CN33	nsp	WAFER 9PIN		CJP09GA19ZY		
CN74	nsp	WAFER 2PIN		CJP02KA060ZY		
CN75	nsp	WAFER 2PIN		CJP02GA89ZY		
CN76	nsp	WAFER 3PIN		CJP03GA01ZY		
CN77	nsp	WAFER 5PIN		CJP05GA01ZY		
CW31	nsp	WAFER 3PIN		CJP03GI236ZW		
CX73	nsp	WAFER 2PIN		CJP02GA89ZY		
CY11	nsp	WAFER CARD CABLE		CJP21GA117XY		
CY12	nsp	WAFER 15PIN		CJP15GB113ZY		
CY73	nsp	WIRE ASSY(2P, 350MM)		CWB4D932350UZ		
CZ31	nsp	WIRE ASSY(3P, 2.0MM, 80MM)		CWB1C90308047		

	Ref No.	Part No.	Part Name	Remark		Q'ty	New
	ET21,22 ET41 ET44	nsp nsp nsp	EARTH PLATE EARTH PLATE EARTH PLATE		CMC1A111 HJT1A025 HJT1A025		
	F701 F801-804 JK31	943172006990D nsp 00D9430183103	VFD HCA-18MS03T FUSE HOLDER OPTICAL MODULE (TX)		CFLHCA-18MS03T KJFC5S HJSTOTX177L		
	JK32 JK71 JW02 JW03	90M-YT004410R 943643001320S nsp nsp	JACK (2P GOLD) JACK USB STRAIGHT(BLACK) WIRE ASS'Y WIRE ASS'Y		CJJ4N067Z CJJ9X006Z CWE8202150RV CWE8202150RV		
	JW91 JW93 L301-303 L701,702	nsp nsp nsp nsp	WIRE 1P BLACK(120MM) WIRE 1P BLACK(120MM) CHIP FERRITE BEAD(60ohm, 2012) CHIP FERRITE BEAD(60ohm, 2012)		CWE8202120AA CWE8202120AA CLZ9R001Z CLZ9R001Z		
	L802 L801 PH71	nsp 943111006890S 00D9430181600	CHIP FERRITE BEAD(60ohm, 2012) TOROIDAL COIL 100uH JACK		CLZ9R001Z CLZ9Z100Z CJJ2E020Z		
⚠	RL81 S701-708 S801	943682006880S 00D9430004402 00D9430140609	RELAY , DC5V, 0.15W, DLS5D1-0.15W TACT SW CSH1A010ZV(SDL1P-B)		CSL1C004ZE CST1A012ZT CSH1A010ZV		
⚠	T801 X301 F901	943101006870D 943141003500S 00D9430199109	SUB TRANS 5V (EUR) DCD710AE2/E1C CRYSTAL FUSE 2.5A 250V	E2	CLT5I013ZE HOX16934E120C KBA2C2500TLEY		
⚠	F901 F902 F902	00D9430199109 00D9430199109 -	FUSE 2.5A 250V FUSE 2.5A 250V OPEN	E1C E2 E1C	KBA2C2500TLEY KBA2C2500TLEY KBA2C2500TLEY		

MAIN PCB ASSY

	Ref No.	Part No.	Part Name	Remark		Q'ty	New
SEMICONDUCTOR GROUP							
	IC11	943243006920D	MCU IC(512K,LQFP-100P)		CVIANAM1494C		*
	IC13	943249006970S	EEPROM (4K,SO8-8P)		CVIM95040-WMN6TP		*
	IC14	943239006900S	5-CH MOTOR DRIVE IC (WITH REG,SSOP-28P)		CVIIP4001CRLTF		*
	IC15	943243006930D	USB DECODER FLASH IC(100PIN, QFP)		CVIANAM1495C		*
	IC16	236710022502S	CP CHIP IC(MF134IS2161,20P,FROM MARANTZ)		CVI236710022502S_M		
	IC17	943245006980S	CD DSP IC(SERVO,AMPLIFIER,DSP,LQFP-80P)		CVITC94A92FG		*
	IC18	00D2623601907	2CH MULTIPLXER IC		HVITC7WH157FU		
	IC19	943239006810S	SIGNAL INVERTER IC(USV)		CVIKIC7SH04FU		
	IC20	90M-HC900160R	IC LM1117S15 REG. (SOT-223)		CVKIA1117S15		
	Q202	00D9430058908	CHIP TR		HVTKTA1504SYRTK		
	D201	00D9430060404	SCHOTTKEY BARRIER DIODE		HVDRB160L60TE25		
	D202	00D9430060404	SCHOTTKEY BARRIER DIODE		HVDRB160L60TE25		
	D206	943209001080S	CHIP DIODE		CVD1SS355T		
CAPACITORS GROUP							
	C101,102	nsp	CHIP CAP		CCUS1H104KC		
	C103-105	nsp	CHIP CAP		CCUS1H103KC		
	C106	nsp	CHIP CAP		CCUS1H102KC		
	C107,108	nsp	CHIP CAP		CCUS1H104KC		
	C109	nsp	CHIP CAP		CCUS1H103KC		
	C110	nsp	CHIP CAP		CCUS1H180JA		
	C111	nsp	CHIP CAP		CCUS1H220JA		
	C112	nsp	CHIP CAP		CCUS1H104KC		
	C113,114	nsp	CHIP CAP		CCUS1H103KC		
	C115-117	nsp	CHIP CAP		CCUS1H104KC		
	C118	nsp	CHIP CAP		CCUS1A105KC		
	C151	nsp	CHIP ELECT CAP		HCEC0JRV2101T		
	C201	nsp	CHIP CAP		CCUS1H222KC		
	C202,203	nsp	CHIP CAP		CCUS1H104KC		
	C204	nsp	CHIP CAP		CCUS1H103KC		
	C205	nsp	CHIP CAP		CCUS1H472KC		
	C206	nsp	CHIP CAP		CCUS1H104KC		
	C207	nsp	CHIP CAP		CCUS1H153KC		
	C208	nsp	CHIP CAP		CCUS1H104KC		
	C210,211	nsp	CHIP CAP		CCUS1H104KC		
	C213	nsp	CHIP CAP		CCUS1H104KC		
	C214	nsp	CHIP CAP		CCUS1H333KC		
	C215	nsp	CHIP CAP		CCUS1H562KC		
	C216	nsp	CHIP CAP		CCUS1H471JA		
	C217	nsp	CHIP CAP		CCUS1H473KC		
	C219	nsp	CHIP CAP		CCUS1H473KC		
	C220-222	nsp	CHIP CAP		CCUS1H104KC		
	C223	nsp	CHIP CAP		CCUS1H103KC		
	C224	nsp	CHIP CAP		CCUS1H470JA		
	C225	nsp	CHIP CAP		CCUS1H153KC		
	C226	nsp	CHIP CAP		CCUS1H103KC		
	C227	nsp	CHIP CAP		CCUS1H471JA		
	C231	nsp	CHIP CAP		CCUS1H102KC		
	C232,233	nsp	CHIP CAP		CCUS1H104KC		
	C234	nsp	CHIP CAP		CCUS1H102KC		
	C235	nsp	CHIP CAP		CCUS1H104KC		
	C236	nsp	CHIP CAP		CCUS1H102KC		
	C237	nsp	CHIP CAP		CCUS1H104KC		
	C238	nsp	CHIP CAP		CCUS1H102KC		
	C239	nsp	CHIP CAP		CCUS1H103KC		
	C240	nsp	CHIP CAP		CCUS1H104KC		
	C243-247	nsp	CHIP CAP		CCUS1H104KC		


	Ref No.	Part No.	Part Name	Remark	Q'ty	New
	C256-260	nsp	CHIP CAP		CCUS1H104KC	
	C265	nsp	CHIP CAP		CCUS1H104KC	
	C268-273	nsp	CHIP CAP		CCUS1H104KC	
	C281,282	nsp	CHIP CAP		HCEC0JRV2101T	
	C284-289	nsp	CHIP CAP		HCEC0JRV2101T	
	C290-296	nsp	CHIP ELECT CAP		HCEC1CRV2101T	
	C501-508	nsp	CHIP CAP		CCUS1H104KC	
	C510,511	nsp	CHIP CAP		CCUS1H104KC	
	C512	nsp	CHIP CAP		CCUS1H220JA	
	C513	nsp	CHIP CAP		CCUS1H180JA	
	C514-520	nsp	CHIP CAP		CCUS1H104KC	
	C531-533	nsp	CHIP CAP		CCUS1H104KC	
	C534	nsp	CHIP CAP		CCUS1H103KC	
	C535	nsp	CHIP CAP		CCUS1H104KC	
	C536	nsp	CHIP CAP		CCUS1H103KC	
	C537	nsp	CHIP CAP		CCUS1H104KC	
	C538	nsp	CHIP CAP		CCUS1H103KC	
	C539	nsp	CHIP CAP		CCUS1H104KC	
	C540,541	nsp	CHIP CAP		CCUS1H103KC	
	C542	nsp	CHIP CAP		CCUS1H104KC	
	C551-557	nsp	CHIP ELECT CAP		HCEC0JRV2101T	
	C601	nsp	CHIP CAP		CCUS1H103KC	
	C602	nsp	CHIP CAP		CCUS1H104KC	
	C603	nsp	CHIP CAP		CCUS1H102KC	
	C604	nsp	CHIP CAP		CCUS1H103KC	
	C605	nsp	CHIP CAP		CCUS1H104KC	
	C606	nsp	CHIP CAP		CCUS1H102KC	
	C610	nsp	CHIP CAP		CCUS1H103KC	
	C611	nsp	CHIP CAP		CCUS1H104KC	
	C612	nsp	CHIP CAP		CCUS1H102KC	
	C613	nsp	CHIP CAP		CCUS1H103KC	
	C614	nsp	CHIP CAP		CCUS1H104KC	
	C615	nsp	CHIP CAP		CCUS1H102KC	
	C616	nsp	CHIP CAP		CCUS1H103KC	
	C617	nsp	CHIP CAP		CCUS1H104KC	
	C618	nsp	CHIP CAP		CCUS1H102KC	
	C619	nsp	CHIP CAP		CCUS1H103KC	
	C620	nsp	CHIP CAP		CCUS1H104KC	
	C621	nsp	CHIP CAP		CCUS1H102KC	

OTHERS PARTS GROUP


	CN12	nsp	WAFER		CJP06GA208ZY	
	CN21	nsp	WAFER CARD CABLE		CJP16GA193ZY	
	CN22	nsp	WAFER		CJP06GA208ZY	
	CN23	nsp	WAFER		CJP05GA208ZY	
	CN51	nsp	WAFER		CJP05GA208ZY	
	CN52	nsp	WAFER		CJP06GA208ZY	
	CN53	nsp	WAFER		CJP11GA208ZY	
	CX11	nsp	WAFER		CJP21GA193ZY	
	CX12	nsp	WAFER CARD CABLE		CJP15GA193ZY	
▲	F101	943661006910S	POLY SWITCH (1.6A, 8V)		CBA5H1600PSUYT	
	L101	943119005010S	CHIP FERRITE BEAD(60ohm, 2012)		CLZ9R001Z	
	L201-206	943119005010S	CHIP FERRITE BEAD(60ohm, 2012)		CLZ9R001Z	
	L207	nsp	AXAIL COIL		HLQ02C101JT	
	L501	943119005010S	CHIP FERRITE BEAD(60ohm, 2012)		CLZ9R001Z	
	X101	943141001200S	CRYSTAL , SMD(9MHZ, HC-49/SMD, 5PF)		COX09000E150S	
	X501	943141001200S	CRYSTAL , SMD(9MHZ, HC-49/SMD, 5PF)		COX09000E150S	

WIRING DIAGRAM

WIRING DIAGRAM

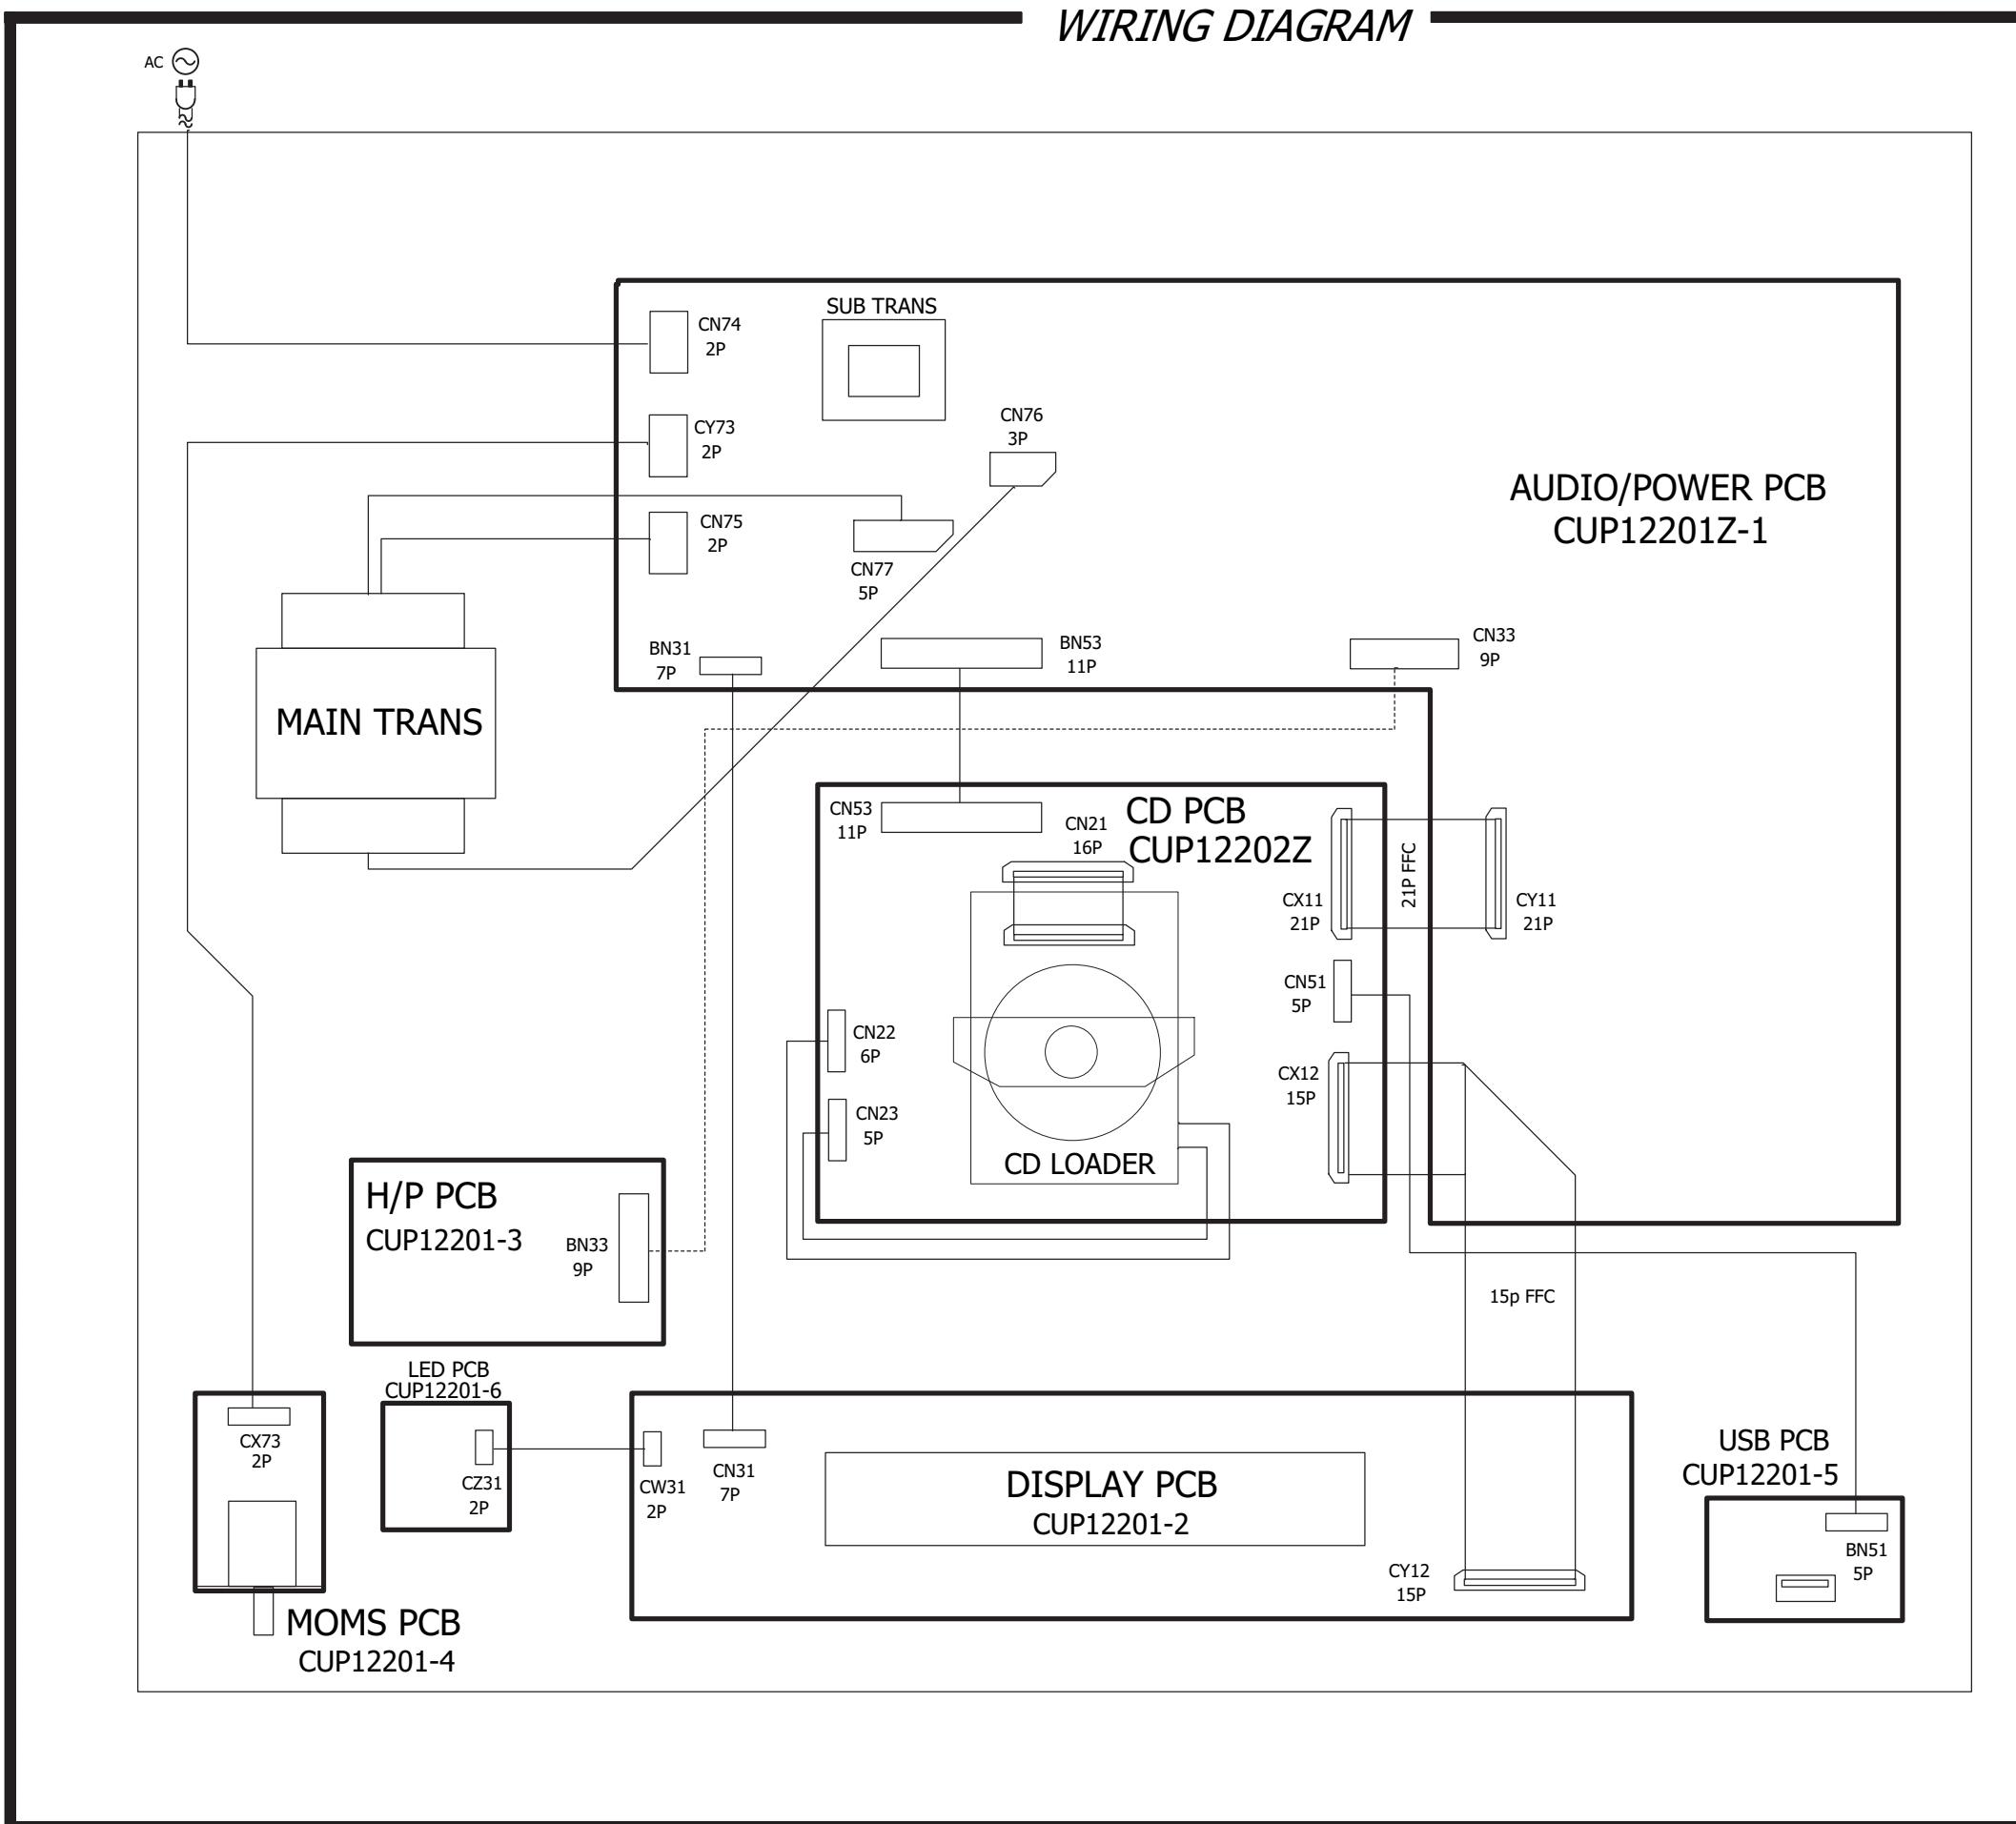

EXPLODED VIEW

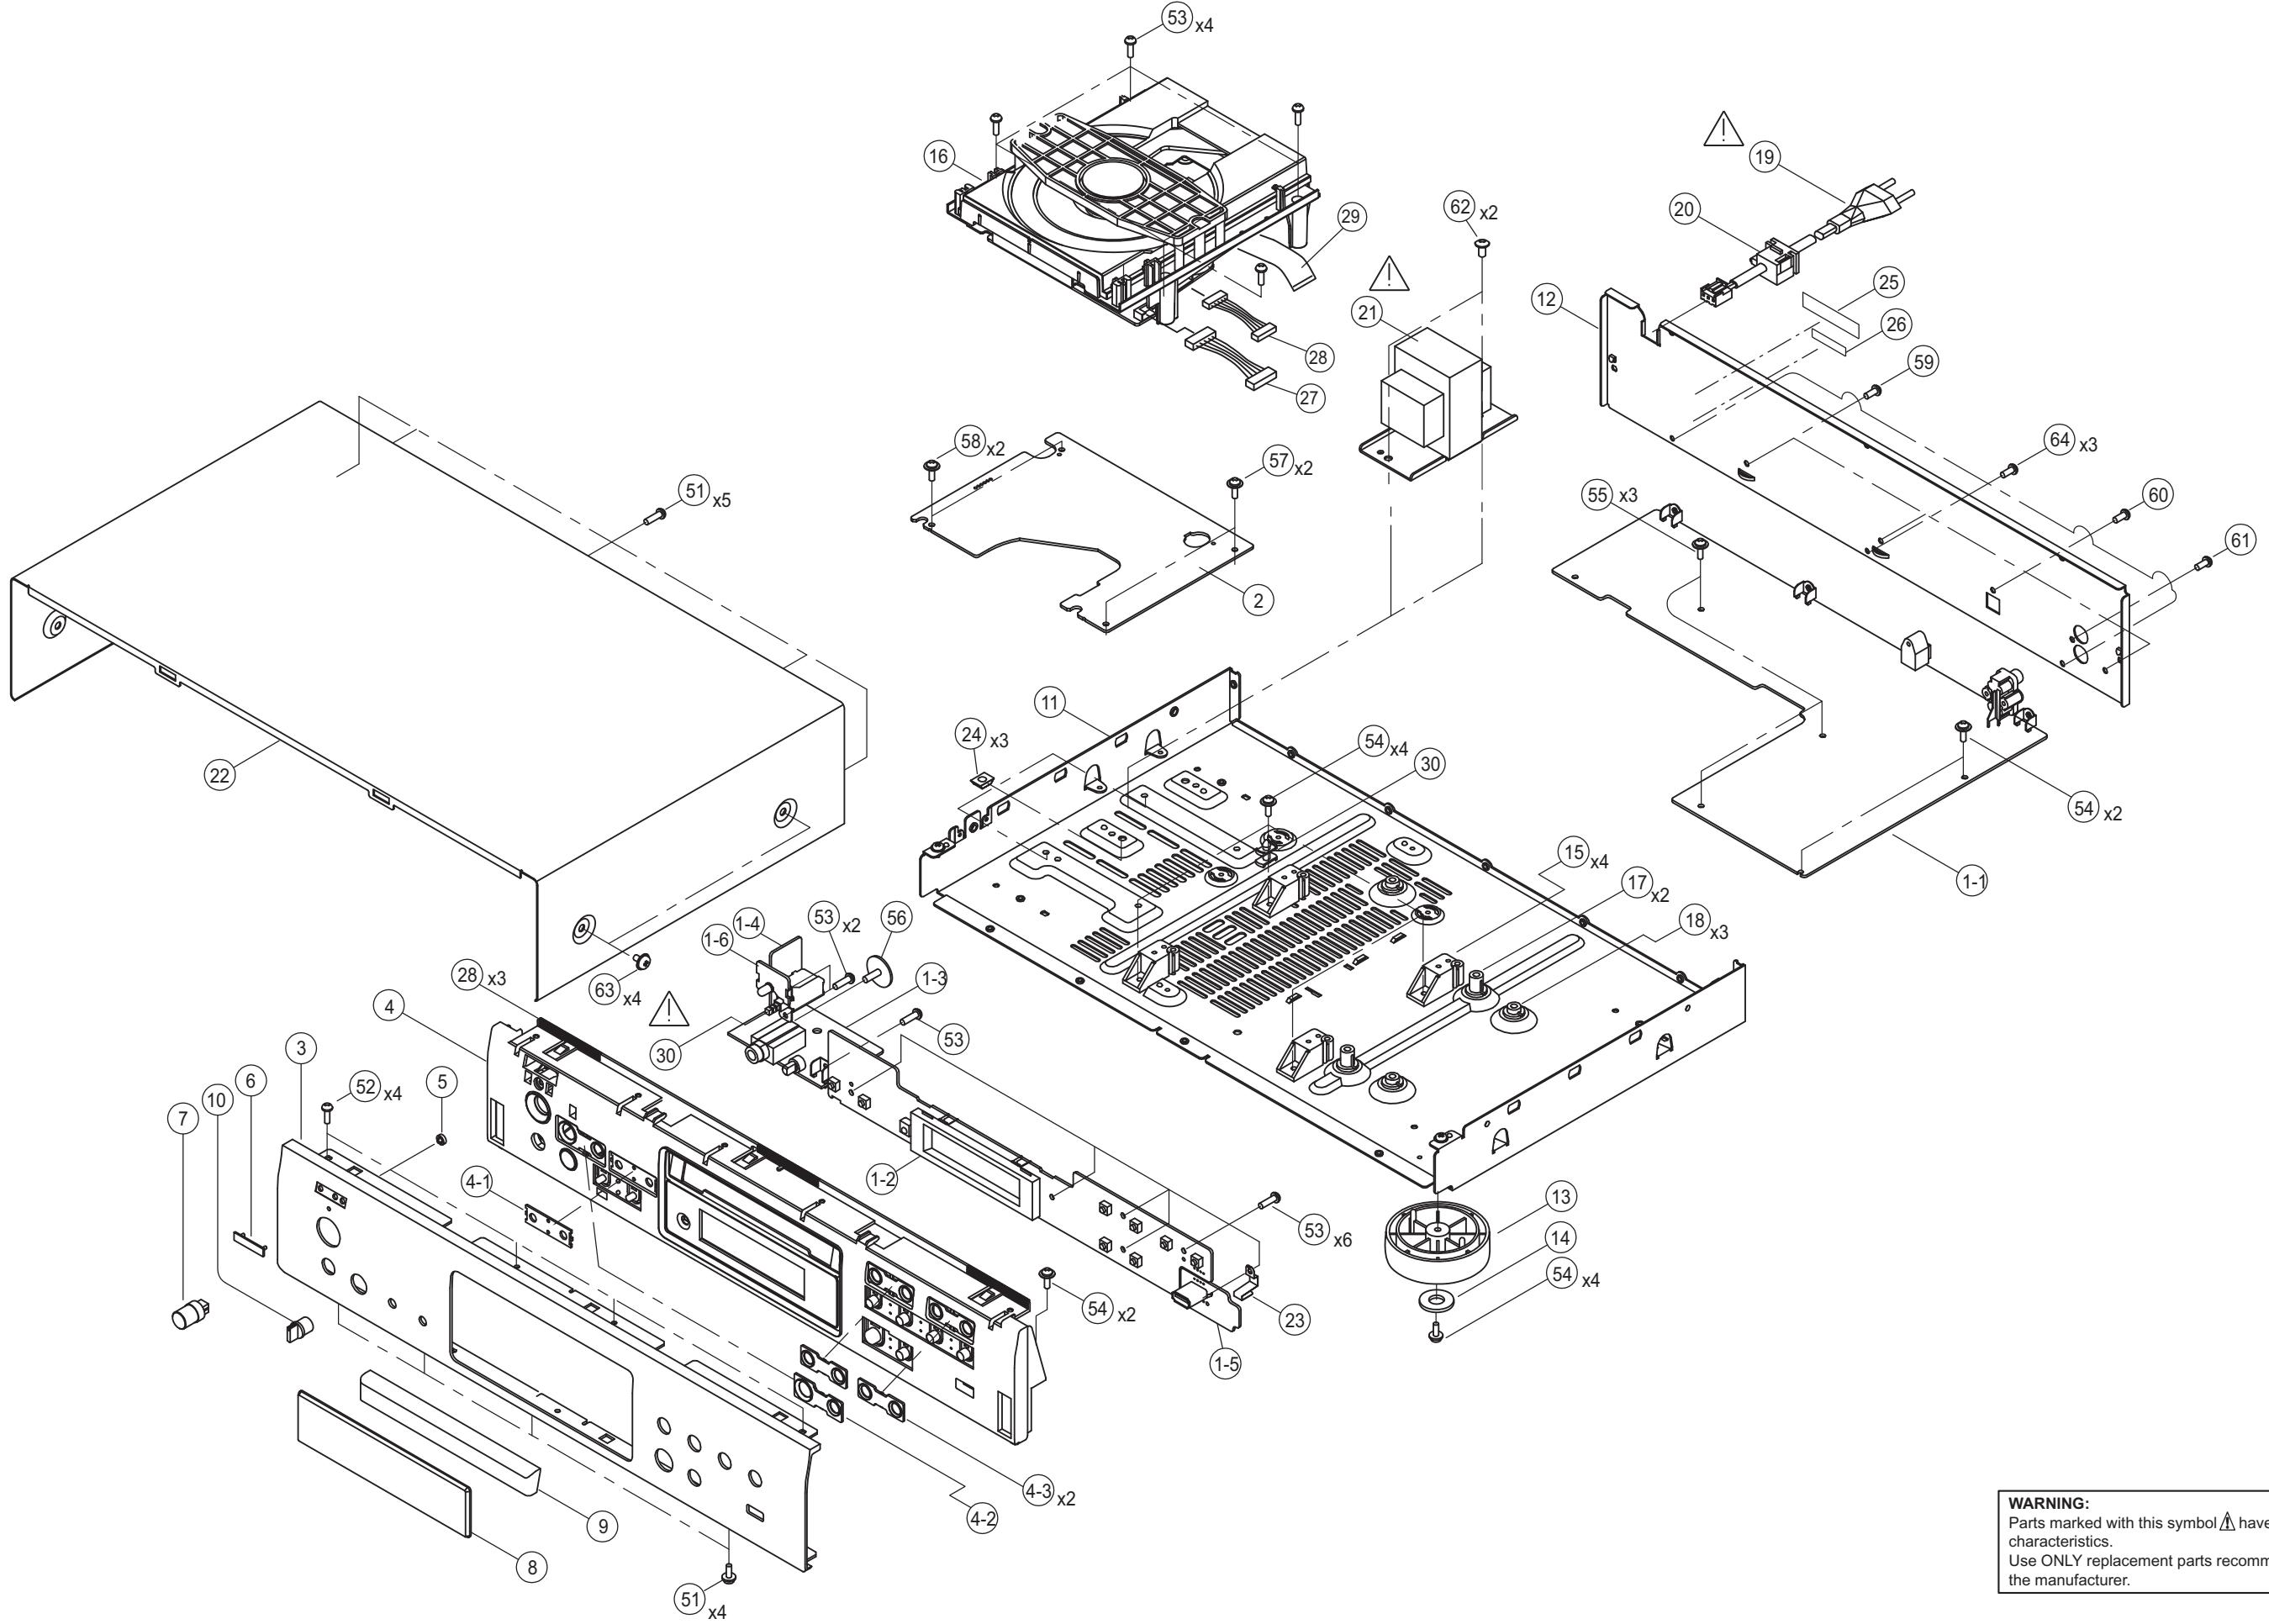

WARNING:
Parts marked with this symbol have critical characteristics.
Use ONLY replacement parts recommended by the manufacturer.

PARTS LIST OF EXPLODED VIEW

* Parts for which "nsp" is indicated on this table cannot be supplied.

* P.W.B. ASS'Y for which "nsp" is indicated on this table cannot be supplied. When repairing the P.W.B. ASS'Y, check the board parts table and order replacement parts.

* The parts listed below are for maintenance only, might differ from the parts used in the unit in appearances or dimensions.

Note: The symbols in the column "Remarks" indicate the following destinations.

E2 : Europe model

E1C : China model


BK : (Black model)

SP : (Premium Silver model)

Ref No.	Part No.	Part Name	Remarks		Q'ty	New
	1 1-1 1-2 1-3 1-4	nsp - - - -	AUDIO/POWER PCB ASSY AUDIO/POWER PCB DISPLAY PCB H/P PCB MOMS PCB		CUP12201B	1 *
	1-5 1-6 2 3 3	- - nsp 943402006350D 943402006360D	USB PCB LED PCB MAIN PCB ASSY FRONT PANEL FRONT PANEL		CUP12202B BKE2 SPE2/SPE1C	1 * 1 * 1 *
	4 4 4-1 4-2 4-3	943443006390D 943443006400D - - -	INNER PANEL INNER PANEL KNOB GUIDE KNOB GUIDE KNOB GUIDE	BKE2 SPE2/SPE1C	CGW1A480B28 CGW1A480RGG45 CGW1A480-1 CGW1A480-2 CGW1A480-3	1 * 1 *
	5 6 6 7 7	00D9430189903 00D1310158049 00D1310158052 00D9430179502 00D9430179609	LENS DENON BADGE DENON BADGE POWER KNOB POWER KNOB	BKE2 SPE2/SPE1C BKE2 SPE2/SPE1C	CGL1A254 CGB1A140U CGB1A140T CGK1A124ZA CGK1A124YA	1 1 1 1 1
	8 9 9 10 10	943416006410D 00D9430180708 00D9430180805 00D9430180902 00D9430181008	FIP WINDOW DOOR DOOR LEVEL KNOB LEVEL KNOB	BKE2 SPE2/SPE1C BKE2 SPE2/SPE1C	CGU1A397Y CGR2A404WB28 CGR2A404RGYG45 CBC1A157B28 CBC1A157RGG45	1 *
	11 12 12 13 14	nsp 943406006670D 943406006680D nsp nsp	BOTTOM CHASSIS REAR PANEL REAR PANEL FOOT FOOT CUSHION	E2 E1C	CUA5A269 CKF3A316Z CKF3A316X CKL1A093 CHG2A289	1 * 1 * 1 *
	15 16 17 18 19	nsp 943302000090D nsp nsp 00D9430180407	MECHA SUPPORT CD MECHANISM ASSY PCB HOLDER PCB HOLDER AC CORD		CMH2A259 CJDWSL11TCNA CHE170 CHE2A030 CJA2B043ZA	4 1 2 3 1
	19 20 21 22 22	943611006700S 00D9430095505 943101006510D 00D9430181105 00D9430181202	AC CORD AC CORD BUSHING POWER TRANSFORMER TOP COVER TOP COVER	E1C BKE2 SPE2/SPE1C	CJA2N047ZA KHR1A028 CLT5M039ZE CKC1A175S56 CKC1A175S55	1 1 1 *
	23 24 25 27 28	nsp nsp nsp 00D9430201000 nsp	EARTH PLATE RUBBER SERIAL NO LABEL FERRITE CORE HEMELON TAPE		CMC1A369 CHG1A113 CQB1A622 CLZ9W003Z CHS1A032	1 * 3 1 1 5
▲	29 30	nsp 00D9430140609	CLAMPER CSH1A010ZV(SDL1P-B)		CHR301 CSH1A010ZV	5 1

	Ref No.	Part No.	Part Name	Remarks		Q'ty	New
SCREWS							
	51	nsp	DOT SCREW 3X8	BK	CTBD3+8JFZR	9	
	51	nsp	DOT SCREW 3X8	SP	CTBD3+8JFN	9	
	52	nsp	SCREW 3X8	BK	CTB3+8JFZR	4	
	52	nsp	SCREW 3X8	SP	CTB3+8GFN	4	
	53	nsp	SCREW 3X10		CTB3+10JR	13	
	54	nsp	SCREW 3X6		CTW3+6JR	12	
	55	nsp	SCREW 3X12		CTB3+12JR	3	
	56	nsp	SCREW 3X10		CTWS3+10GR	1	
	57	nsp	SCREW 3X18		CTW3+18JR	2	
	58	nsp	SCREW 3X22		CTW3+22JR	2	
	59	nsp	SCREW 3X6		CTB3+6FFZR	3	
	60	nsp	SCREW 3X8		CTB3+8JFZR	1	
	61	nsp	SCREW 3X10		CTB3+10JFZR	1	
	62	nsp	SCREW 4X6		CTB4+8FR	2	
	63	nsp	SCREW 4X6	BK	CTWD4+6FFZR	4	
	63	nsp	SCREW 4X6	SP	CTWD4+6FFN	4	
	64	nsp	SCREW 3X8		CTBD3+8JFZR	3	

EXPLODED VIEW OF CD MECHANISM UNIT

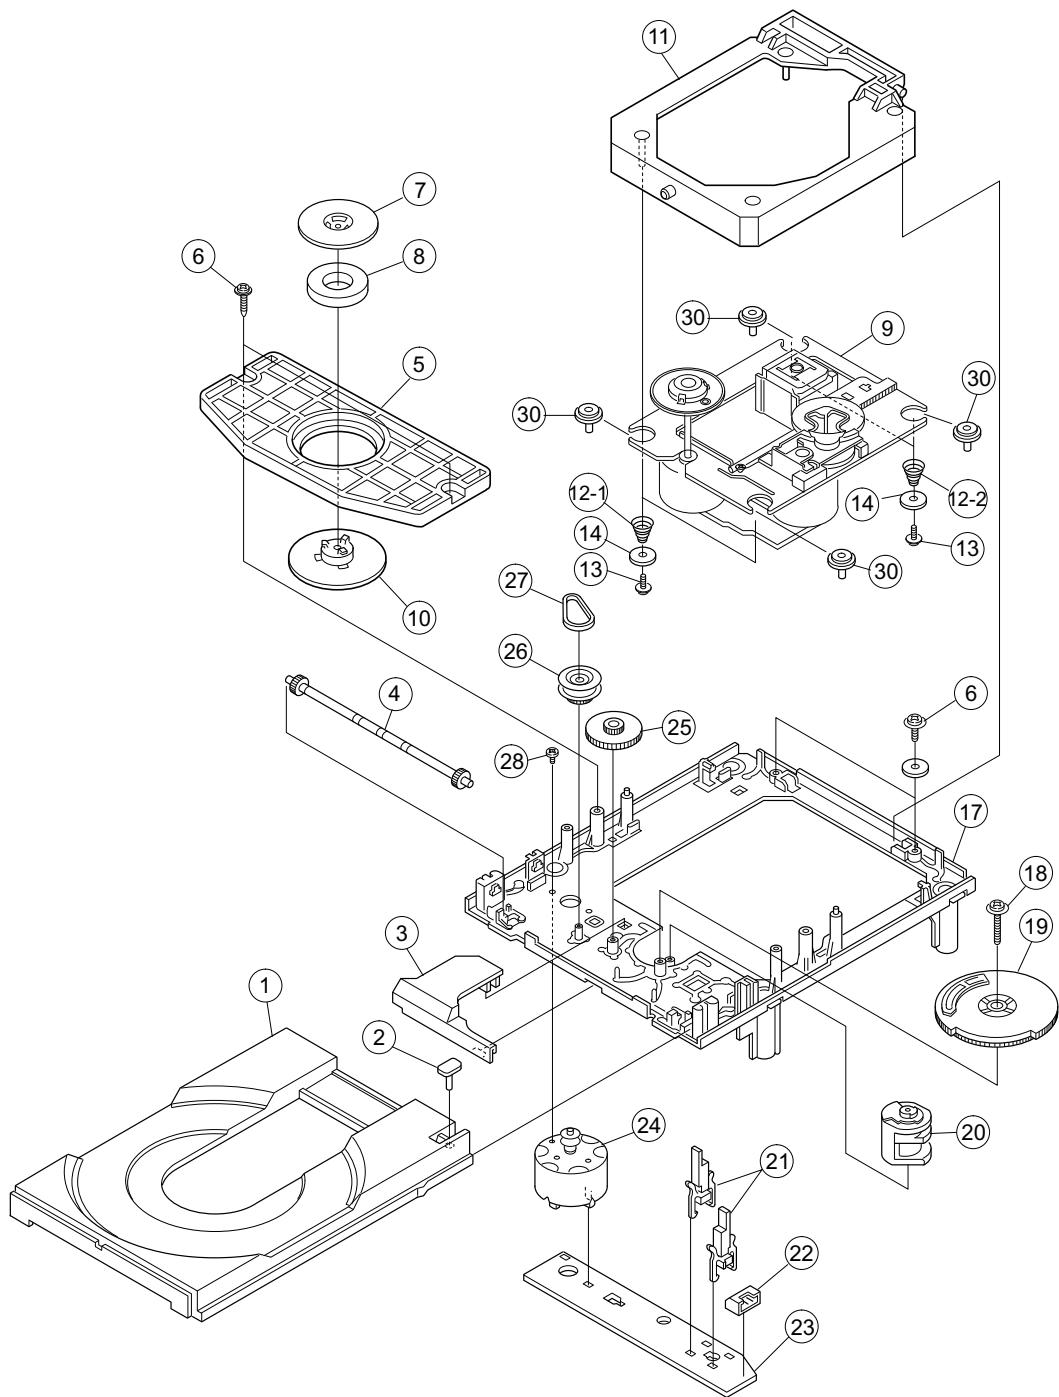


PARTS LIST OF CD MECHANISM UNIT

* Parts for which "nsp" is indicated on this table cannot be supplied.\

* The parts listed below are for maintenance only, might differ from the parts used in the unit in appearances or dimensions.

Ref. No.	Part No.	Part Name	Remarks	Q'ty	New
1	00DS264629001	Tray (C)		1	
2	-	-	This part (No.2) doesn't belong to the tray. Take it down from old tray and use again when changing the tray.	1	
3	00DS262554401	Gear cover(S)		1	
4	00DS262553501	Tray gear(S)		1	
5	00DS262554601	Chuckning plate		1	
6	nsp	Screw 2.6 x 7 +PTPWH		4	
7	nsp	Chuckning yoke		1	
8	nsp	Magnet		1	
9	00D9640011007	MECHA DA11T3CN		1	
10	nsp	Chuckning pulley		1	
11	nsp	Sub chassis Ass'y		1	
12-1	00DS262723601	Coil spring(front)		2	
12-2	00DS262723501	Coil spring(back)		2	
13	nsp	Screw 2.6 x 10 +P	No slit type2	4	
14	nsp	Washer 2130		4	
17	nsp	Outsert main chassis(S)		1	
18	nsp	Screw 2.6 x 16 +PTPWH		1	
19	00DS262554701	Drive gear(S)		1	
20	00DS262554504	Contorol cam(S)		1	
21	00DS169266711	Leaf switch		2	
22	nsp	5P connector		1	
23	nsp	Loading P.W.B		1	
24	00DSX26251171	Loading motor Ass'Y		1	
25	00DS262553402	Middle gear		1	
26	00DS262553602	Loading pulley		1	
27	00DS365338700	LM belt		1	
28	nsp	Screw 2.6 x 2.5 +B		1	
30	00DS262723401	Insulator		4	

PACKING VIEW

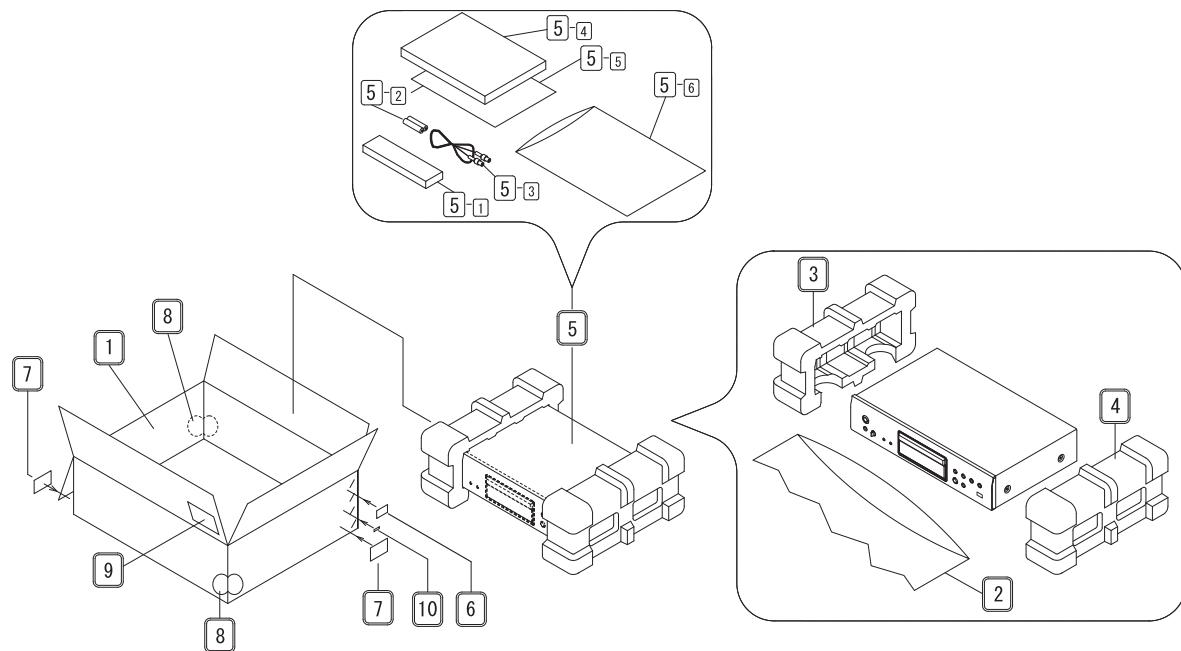

PARTS LIST OF PACKING & ACCESSORIES

* Parts for which "nsp" is indicated on this table cannot be supplied.

* The parts listed below are for maintenance only, might differ from the parts used in the unit in appearances or dimensions.

Note: The symbols in the column "Remarks" indicate the following destinations.

E2 : Europe model

E1C : China model

BK : (Black model)

SP : (Premium Silver model)

Ref No.	Part No.	Part Name	Remarks	Q'ty	New
1	943531006720D	CARTON BOX	E2	CPG2A819U	1 *
1	943531006730D	CARTON BOX	E1C	CPG2A819S	1 *
2	nsp	POLY BAG(Set)		CPB1A013Y	1
3	00D9430177902	SNOW PAD		CPS1A748	1
4	00D9430178008	SNOW PAD		CPS1A749	1
5-1	943307006790D	REMOCON	BKE2	CARTDCD710AEBK	1 *
5-1	943307006800D	REMOCON	SPE2/SPE1C	CARTDCD710AESP	1 *
5-2	nsp	BATTERY (SIZE 'AAA')		CABR03PPB	2
5-3	nsp	PIN CORD		CJS4N014Z	
5-4	943541006760D	INSTRUCTION MANUAL	E2	CQX1A1445Z	1 *
5-4	943541006770D	INSTRUCTION MANUAL	E1C	CQX1A1447Z	1 *
5-5	nsp	S.S.LIST(EX)		CQE1A226Q	1
5-6	nsp	POLY BAG		CPB1061W	1
6	nsp	POS LABEL	BKE2	CQB1A772S	1 *
6	nsp	POS LABEL	SPE2	CQB1A772T	1 *
6	nsp	POS LABEL	SPE1C	CQB1A772P	1 *
7	nsp	CONTROL LABEL		CQB1A627	2 *
8	00D9430194804	COLOR LABEL	SPE2/SPE1C	CQB1A676	2
9	nsp	DATE LABEL	E1C	CQB1A622	1
10	nsp	CARTON LABEL(C)	E1C	CQB1A940Z	1 *

NOTE FOR SCHEMATIC DIAGRAM

WARNING:

Parts marked with this symbol  have critical characteristics.
Use ONLY replacement parts recommended by the manufacturer.

CAUTION:

Before returning the unit to the customer, make sure you make either (1) a leakage current check or (2) a line to chassis resistance check. If the leakage current exceeds 0.5 millamps, or if the resistance from chassis to either side of the power cord is less than 460 kohms, the unit is defective.

WARNING:

DO NOT return the unit to the customer until the problem is located and corrected.

NOTICE:

ALL RESISTANCE VALUES IN OHM. k=1,000 OHM

M=1,000,000 OHM

ALL CAPACITANCE VALUES IN MICRO FARAD.

P=MICRO-MICRO FARAD

EACH VOLTAGE AND CURRENT ARE MEASURED AT
NO SIGNAL INPUT CONDITION.

CIRCUIT AND PARTS ARE SUBJECT TO CHANGE
WITHOUT PRIOR NOTICE.

SHEET 01 MAIN UNIT

TO DISPLAY UNIT

MCU UPDATE FOR ANAM

MCU UPDATE FOR DENON


TO MECHANISM

SHEET 04



HOST MCU PARTS

HOST MCU
TMP92FD23AFG

RESET IC 3V

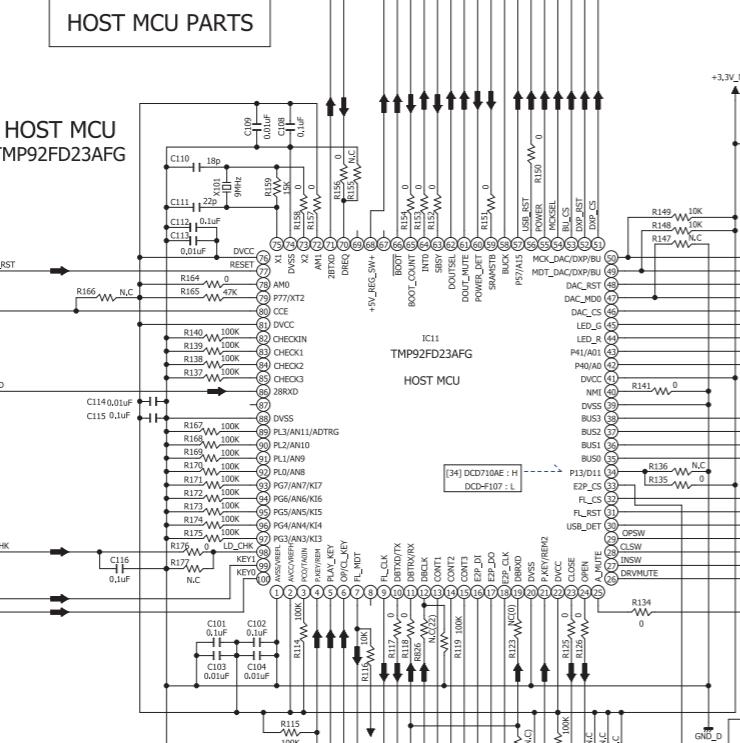

MOTOR DRIVE PARTS

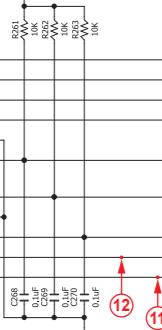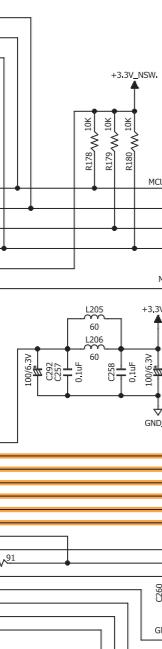BOLERO VERSION
MODEL R573 R574
DCD-710AE 10K N.C.
DCD-F107 N.C. 10K


TO MECHANISM

SHEET 04


TO POWER UNIT

SHEET 03

CD DSP PARTS

CD DSP
TC94A92FG
ALL VERSION 'L' / 'L'
VERSION SEL





L	L	E2
L	H	E3
H	L	JP
H	H	E1C

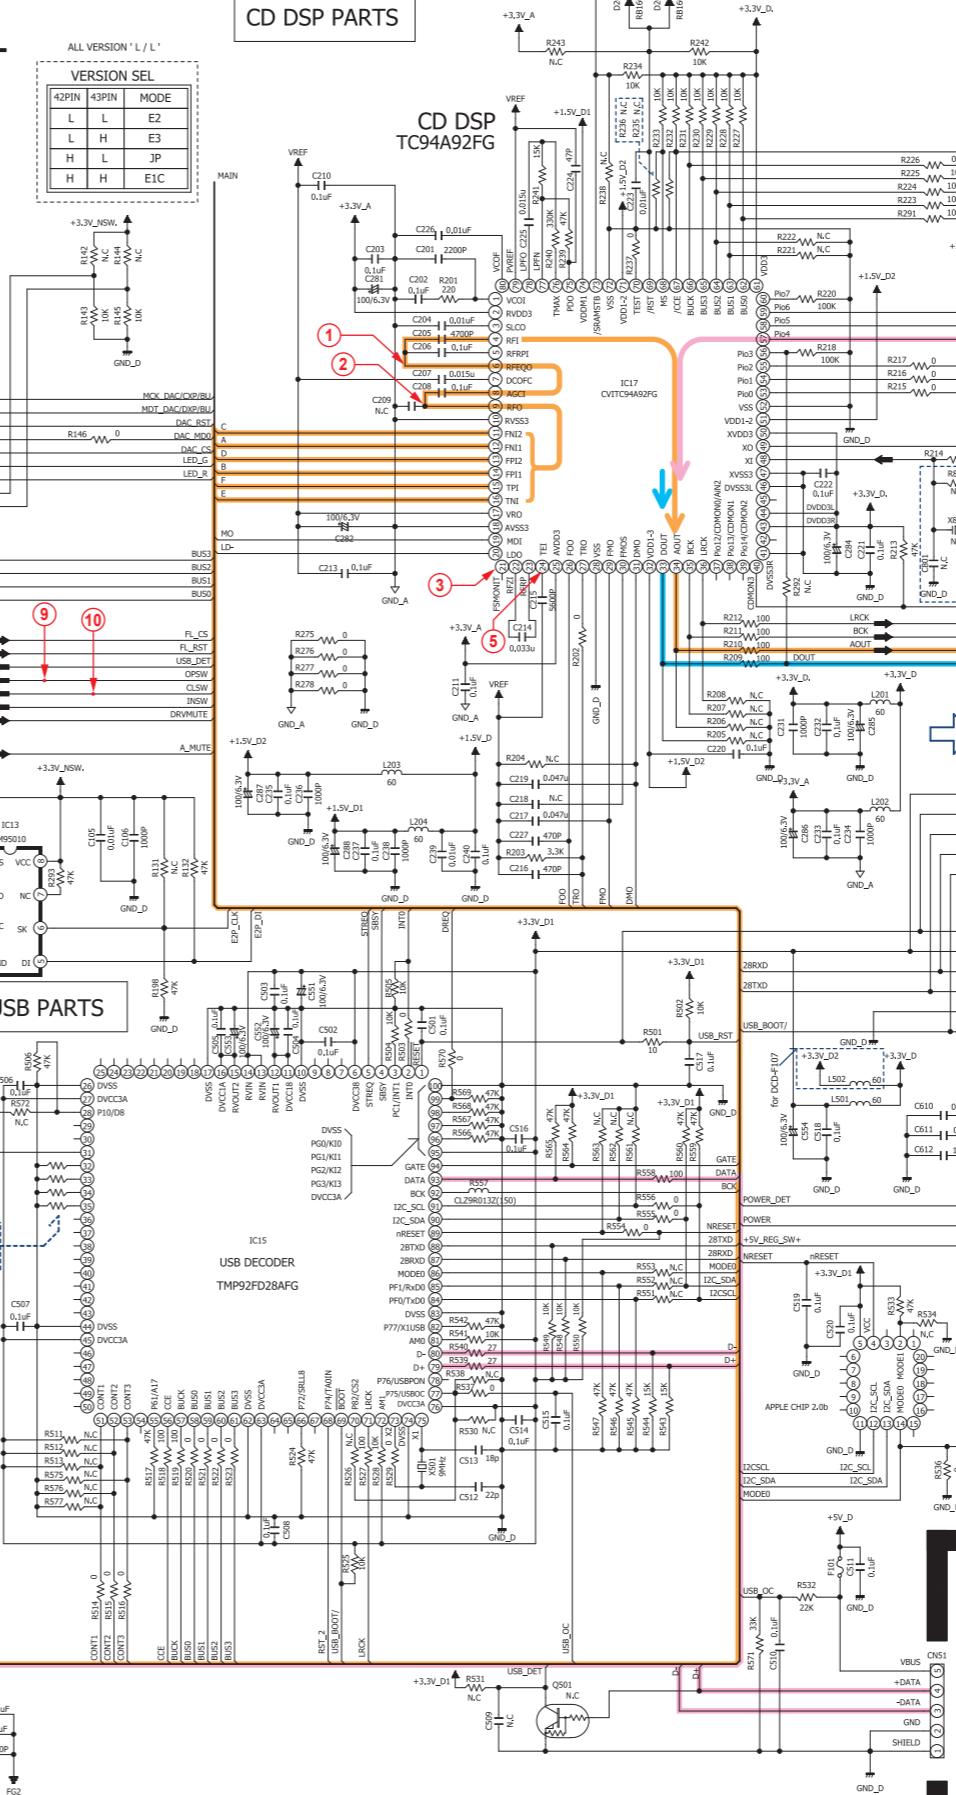

- Digital out SIGNAL LINE
- CD SIGNAL LINE
- USB SIGNAL LINE

SCHEMATIC DIAGRAMS (1/4)
CUP12202 MAIN UNIT

DCD-710AE

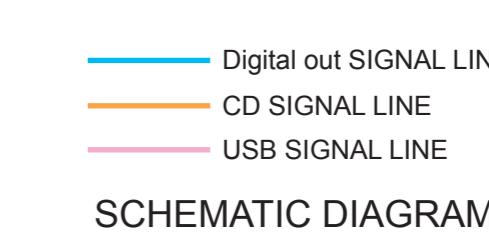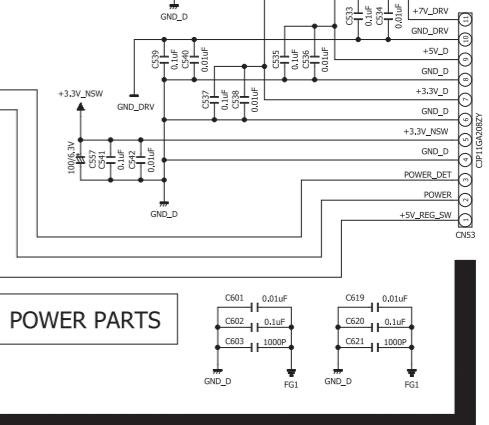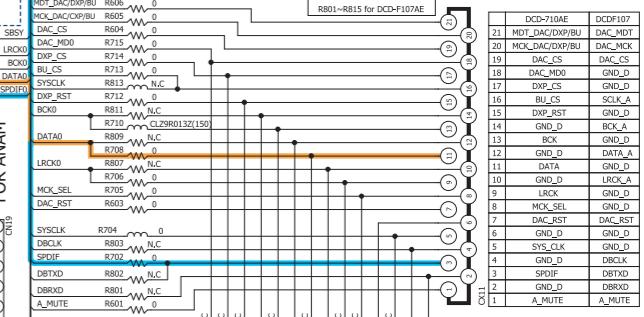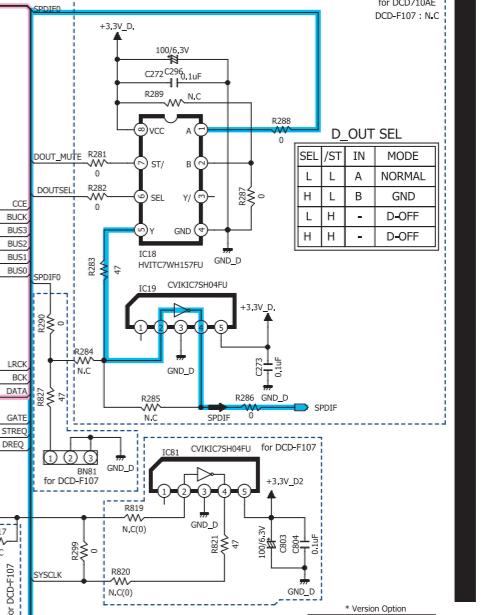

TO POWER UNIT

SHEET 03

A


B

C


D

E


F

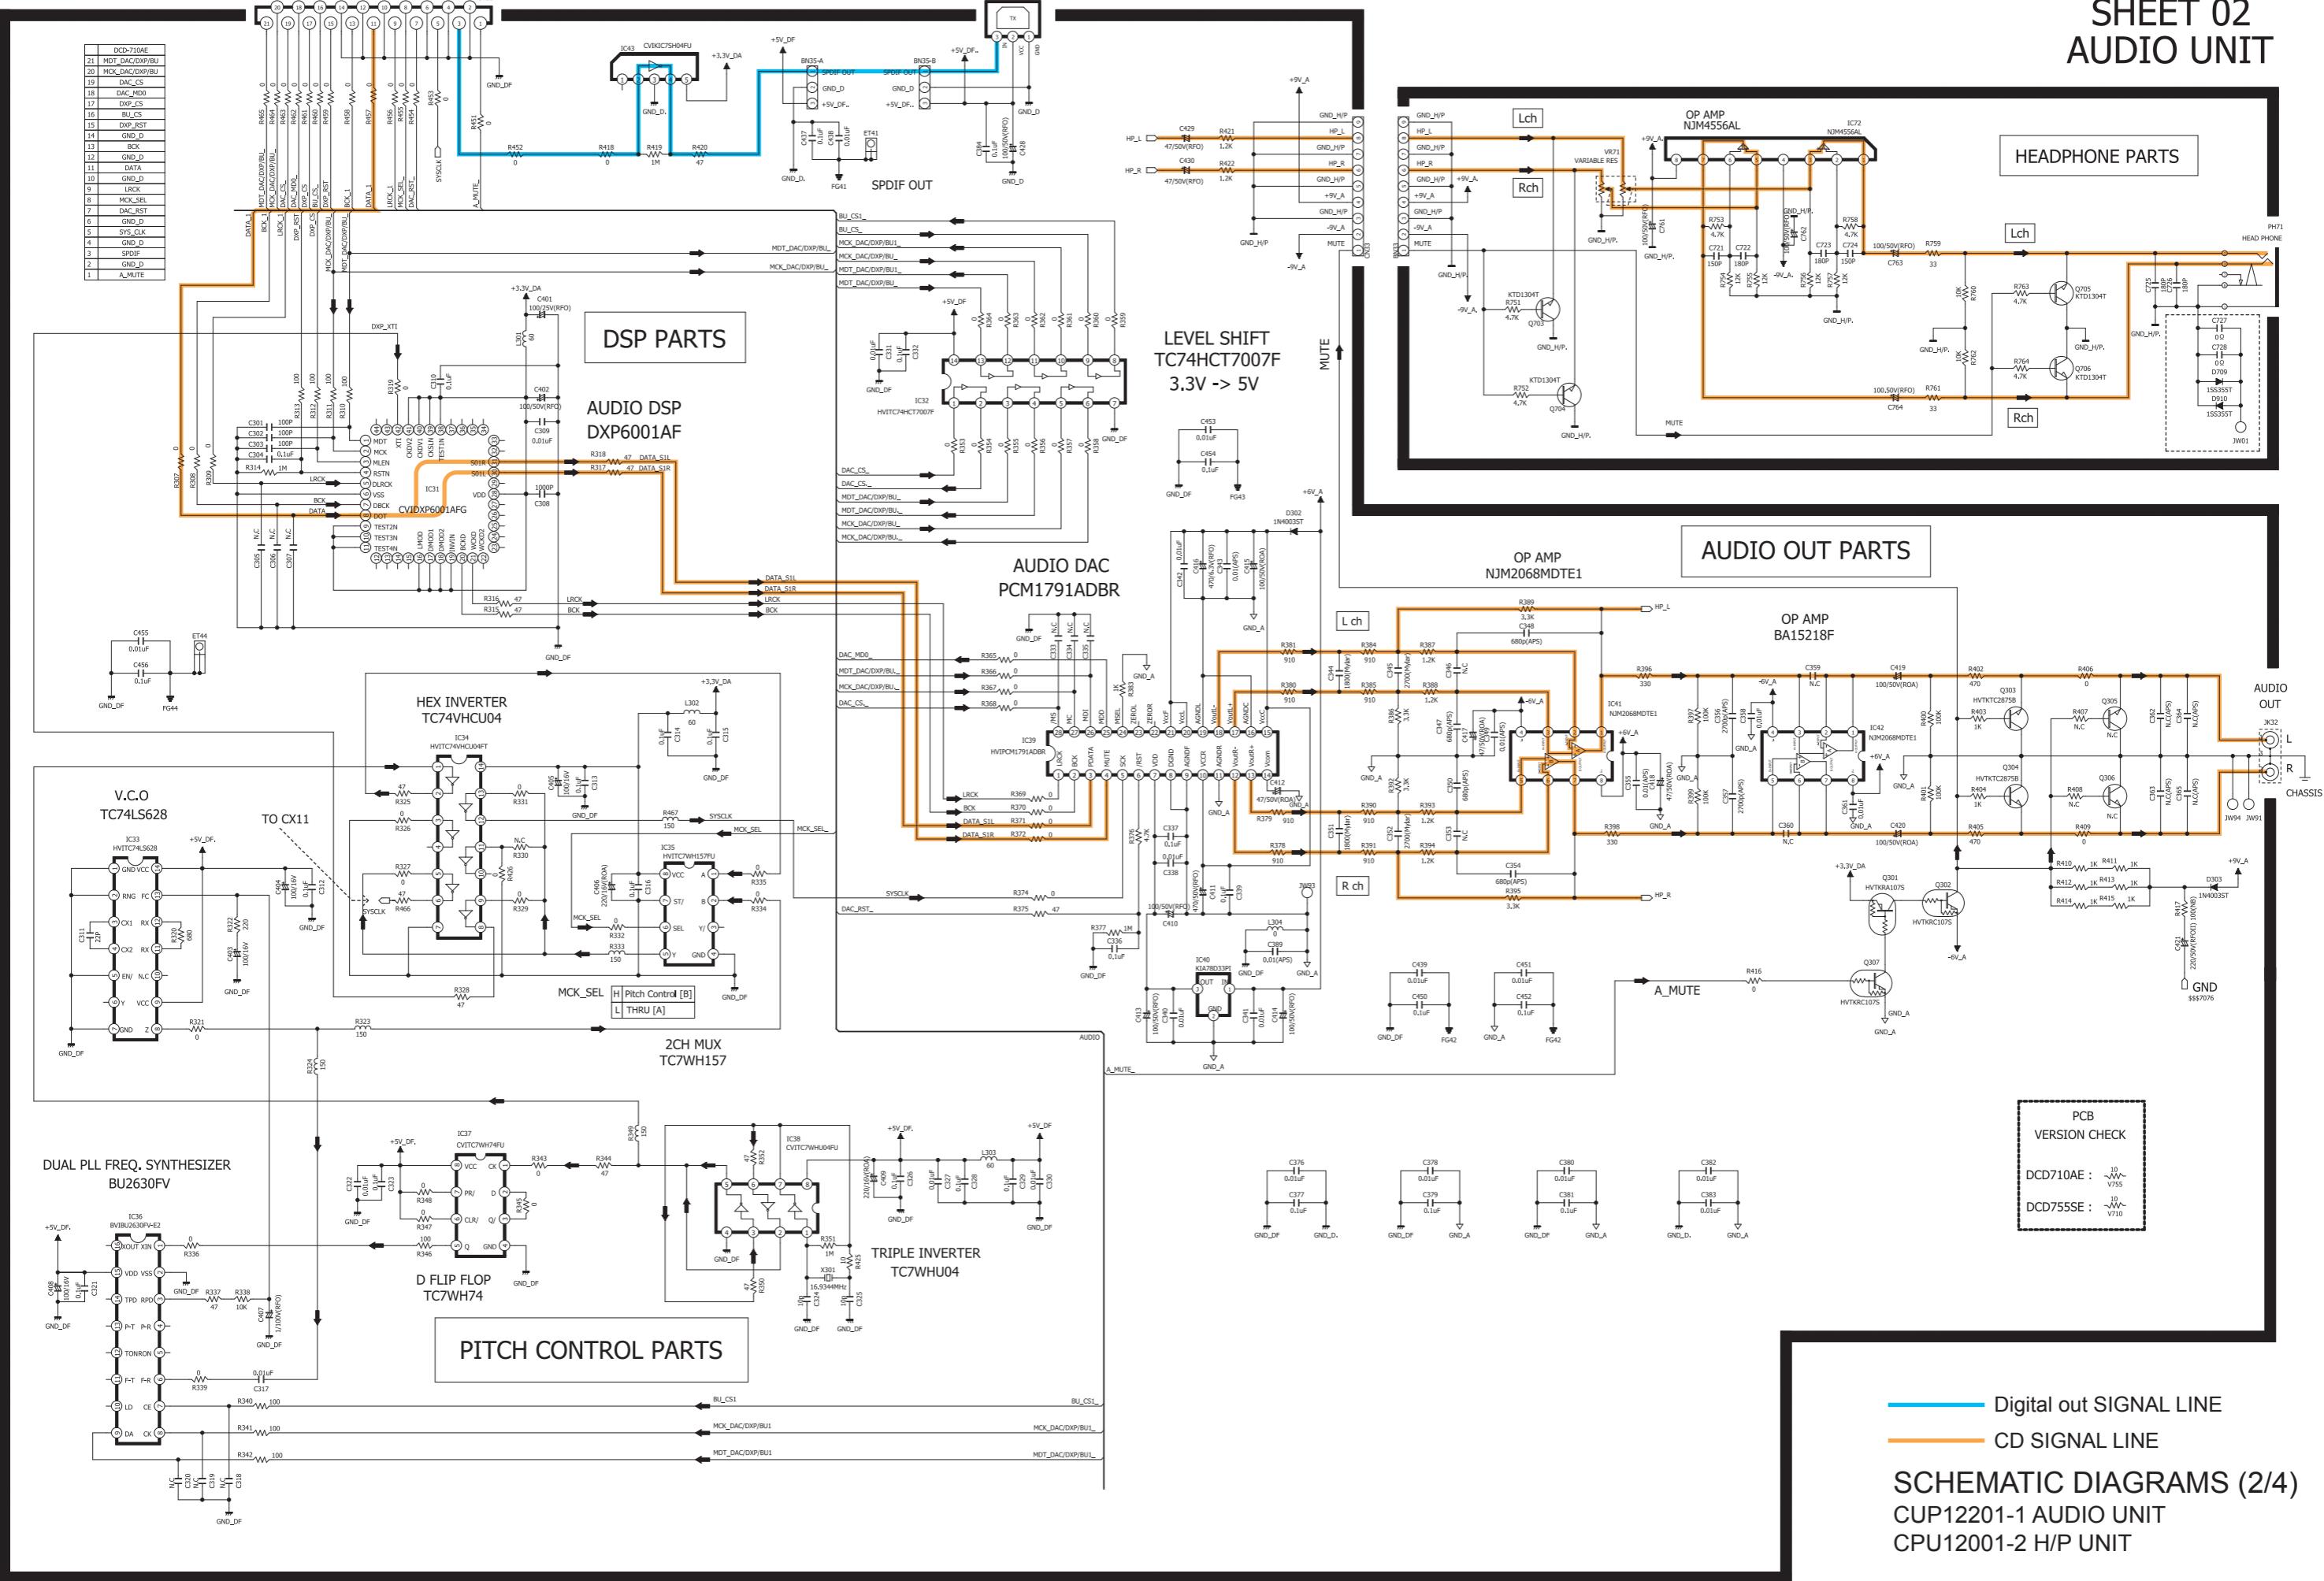

**SHEET 03
POWER UNIT**

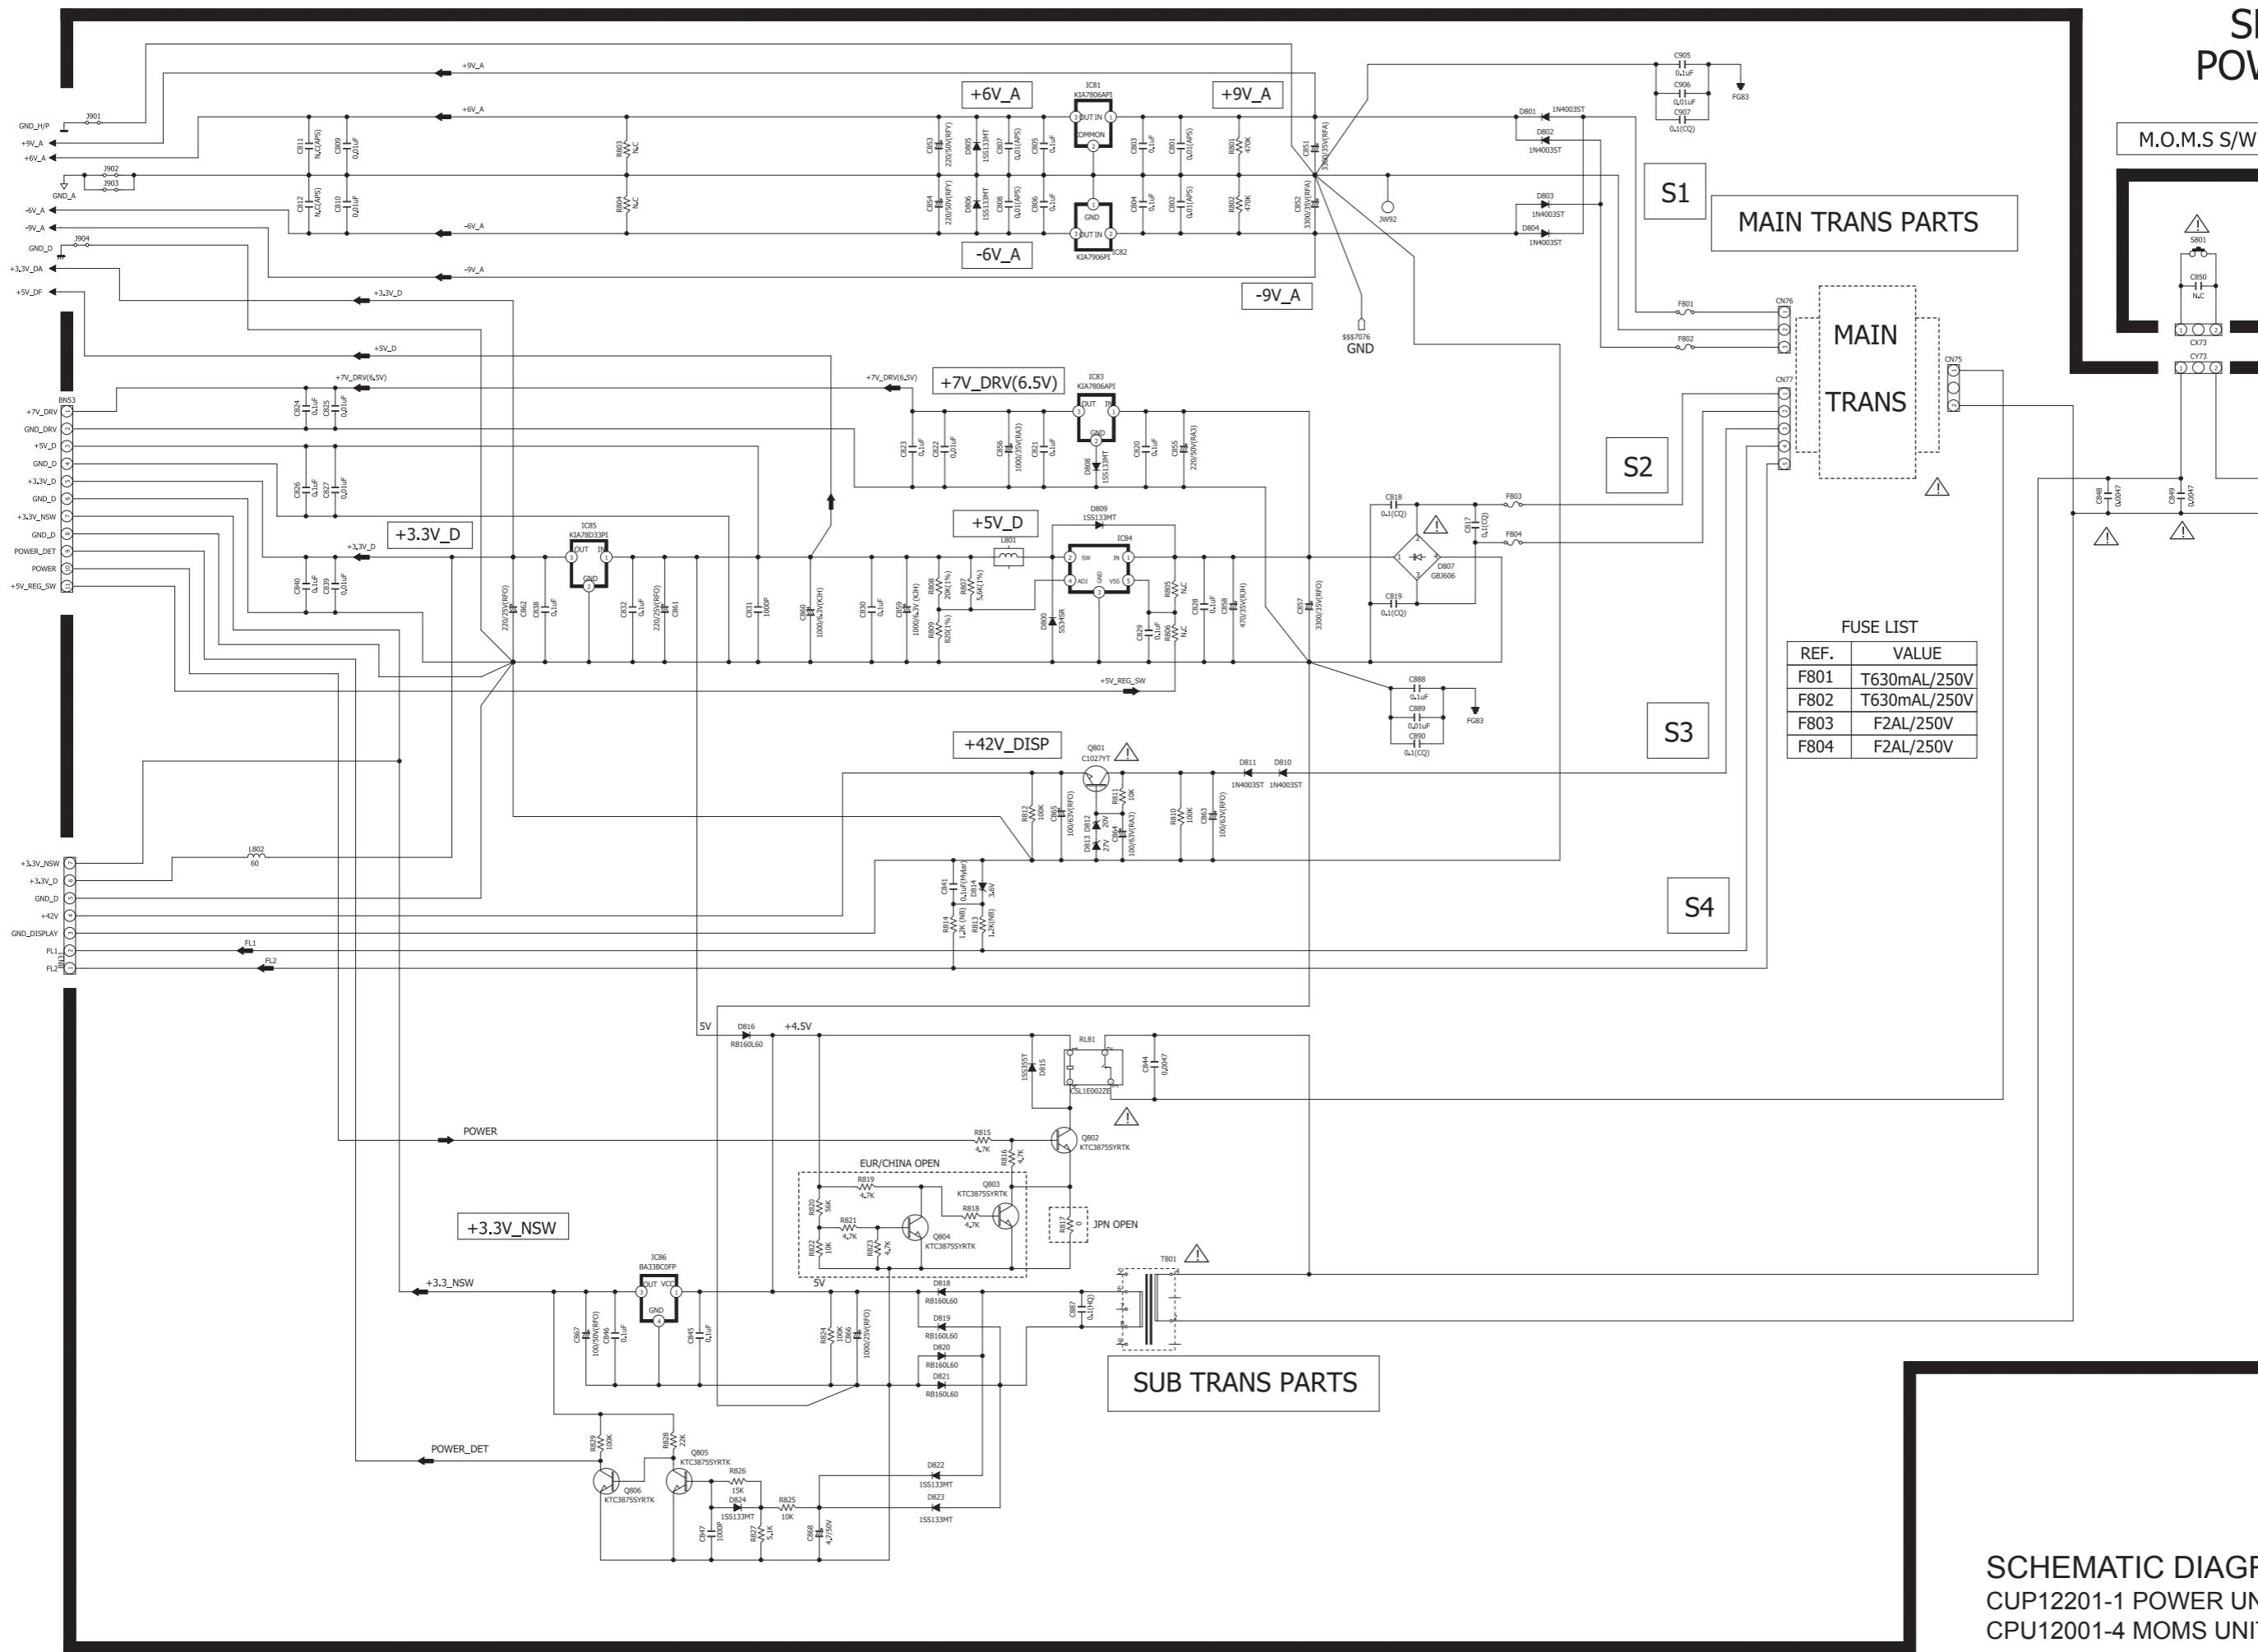

SCHEMATIC DIAGRAMS (3/4)
CUP12201-1 POWER UNIT
CPU12001-4 MOMS UNIT

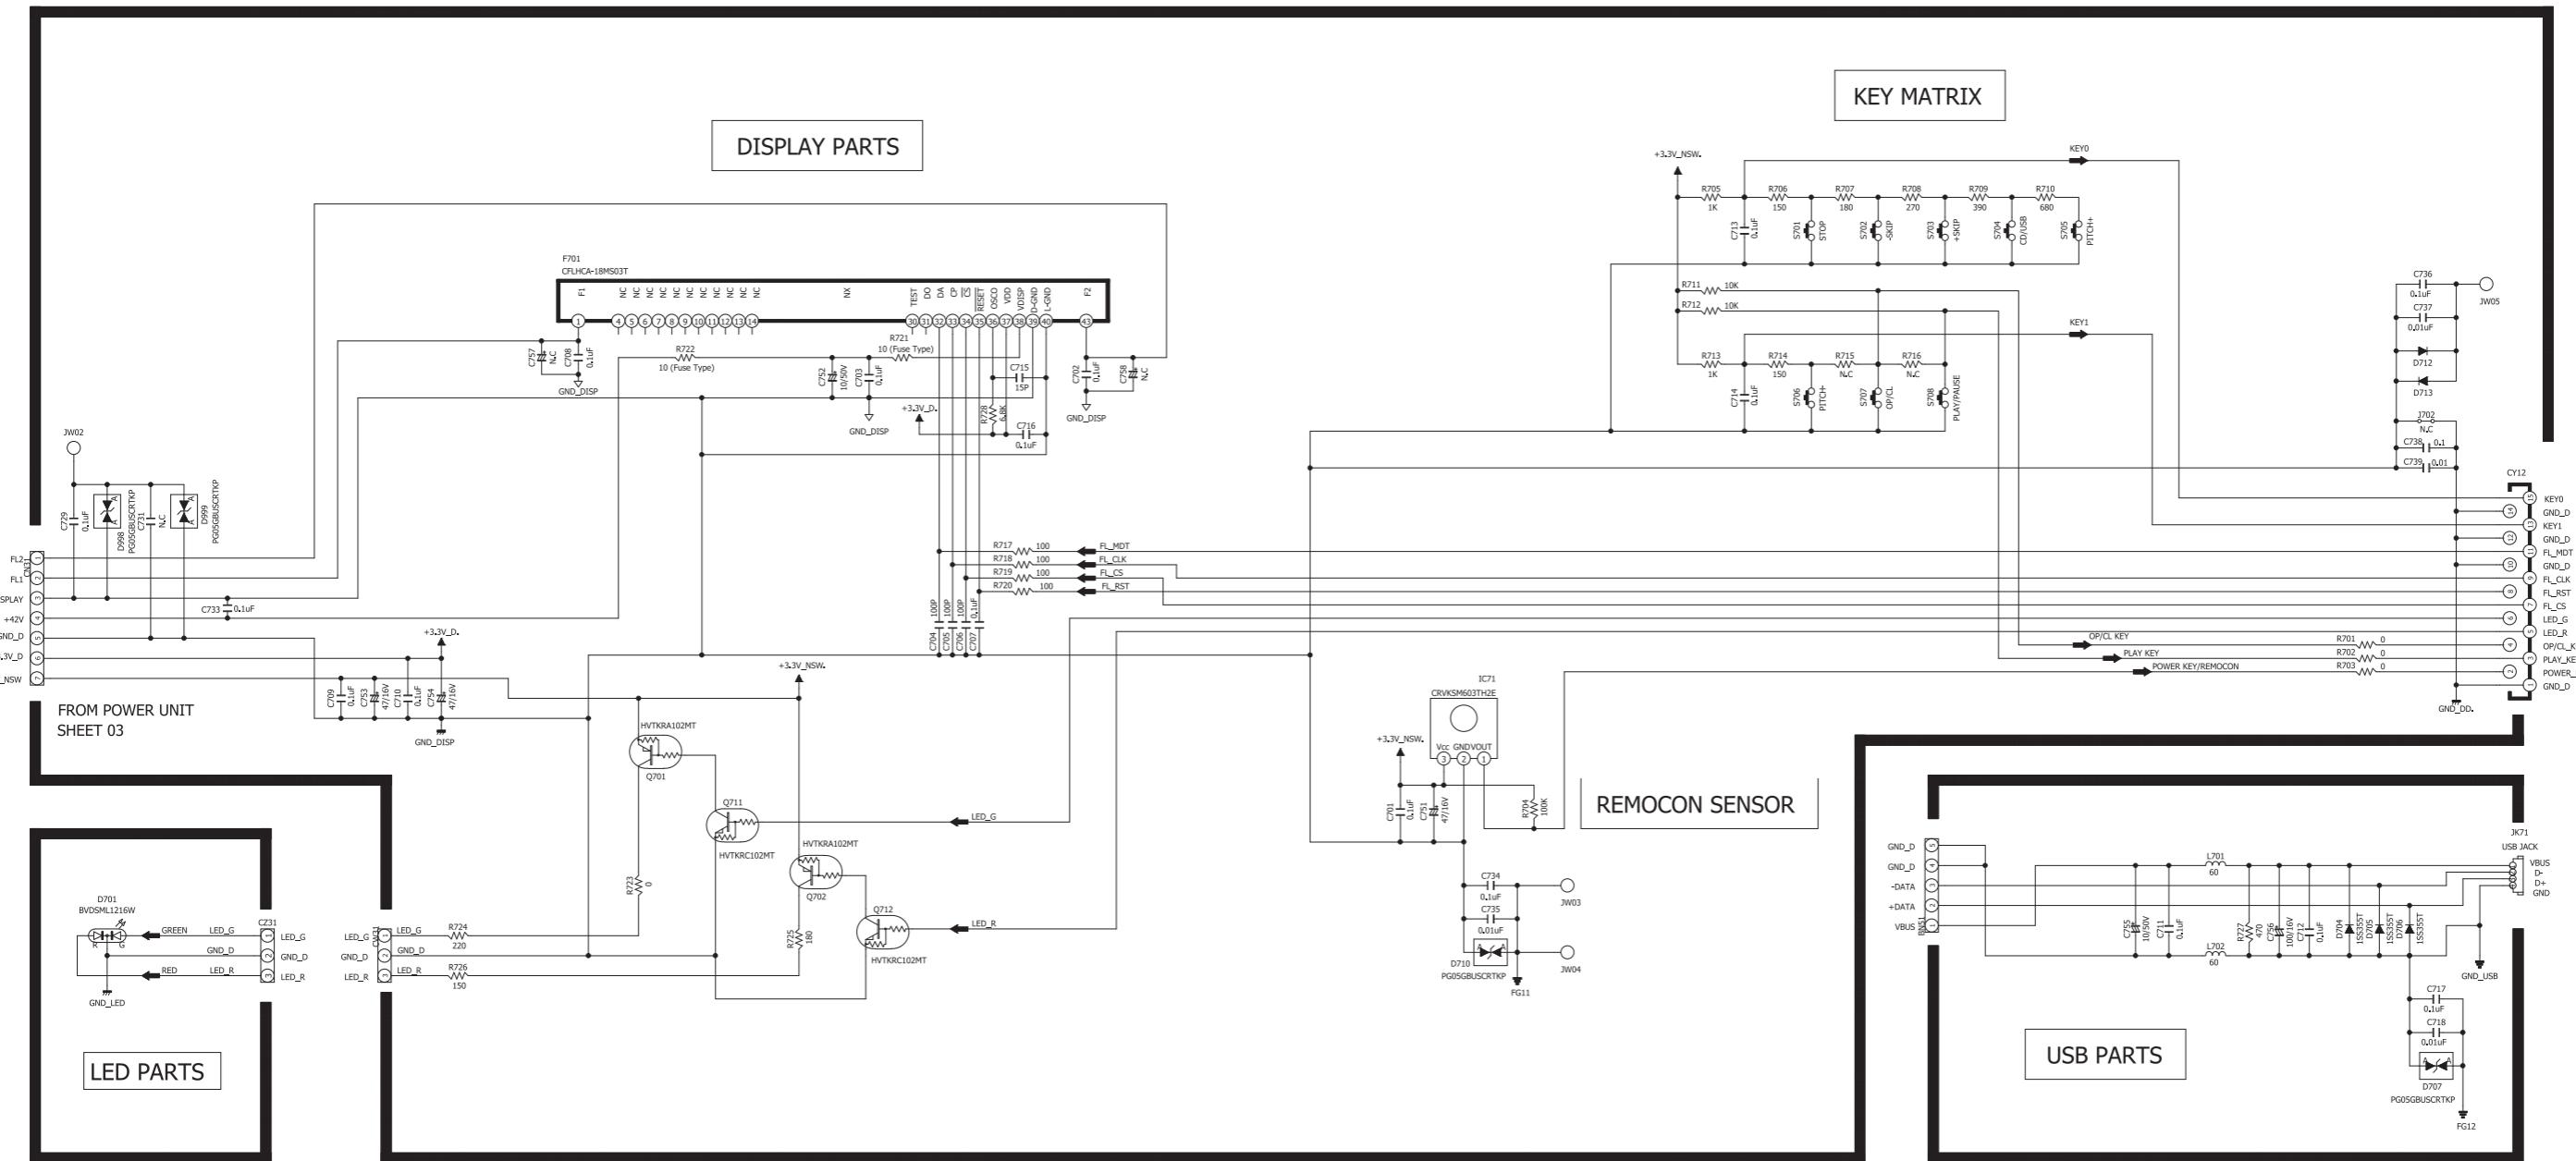

SCHEMATIC DIAGRAMS (4/4)
CUP12201-2 DISPLAY UNIT
CPU12001-5 USB UNIT
CPU12001-6 LED UNIT